


# Manual for Vego Pacific Greenhouse 10.5 X 20.5 ft.


Copyright @ 2025 Vego

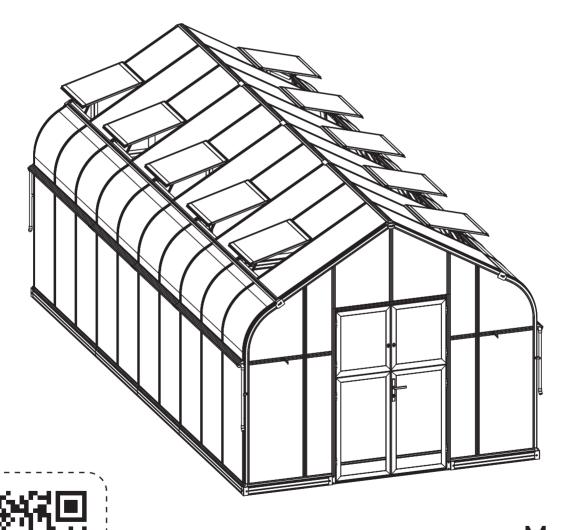

Model: VGHP1020PCBK

**Dimensions:** 

10.5' X 20.5' X 9.1' (H)

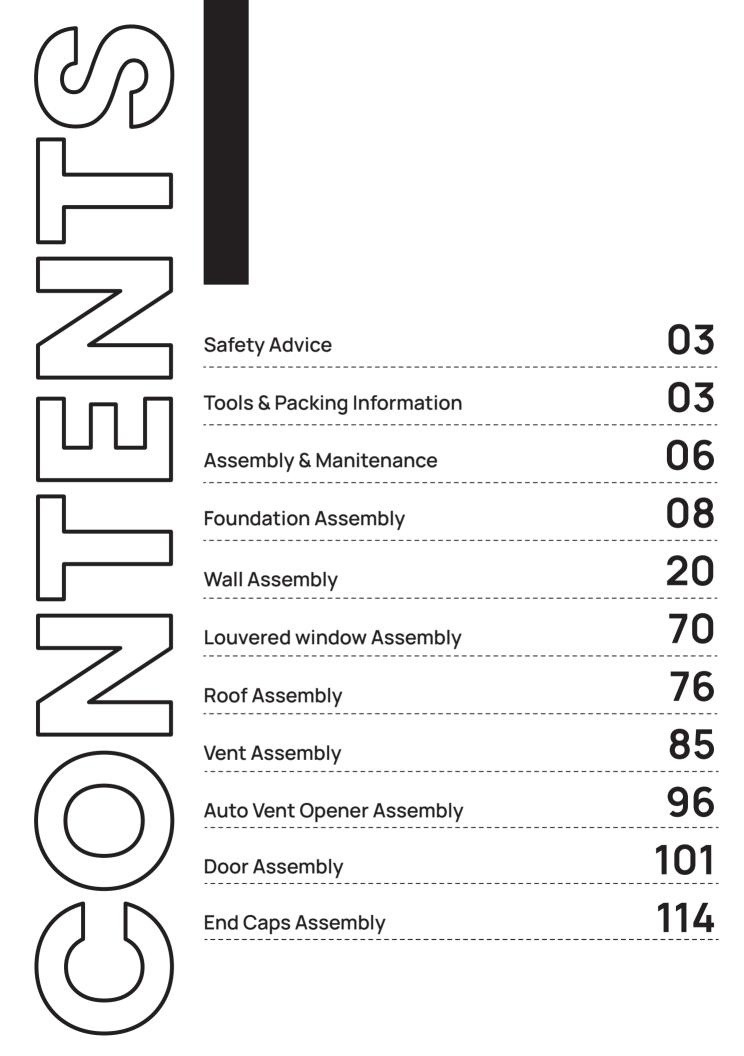



- 1. This product is designed to be used as a greenhouse.
- 2. It is important to assemble the product according to this manual, do not skip or modify any steps.
- 3. Wear gloves, shoes and safety glasses during assembling to avoid injury.
- 4. Do not climb or stand on the roof.
- 5. Keep children away from the assembly area.
- 6. Do not assemble the product in windy, wet or bad weather conditions.
- 7. Do not assemble the product under the influence of medication, alcohol or drugs.

















### Tools & Packing Information

#### **Tools Provided**

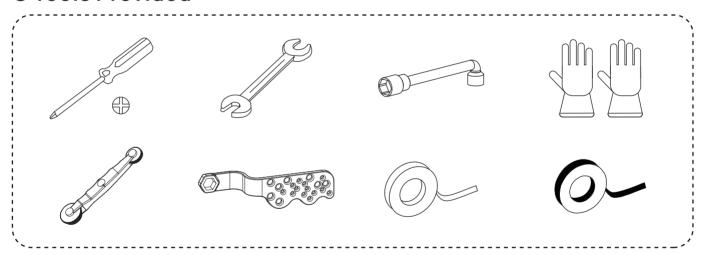

#### Tools Required (Not Provided)






Tape measure



**Scissors** 



Rubber mallet









#### • 2+ Person Assembly






vegogarden.com

#### Packing Information

Aluminum Frame & Hardware:

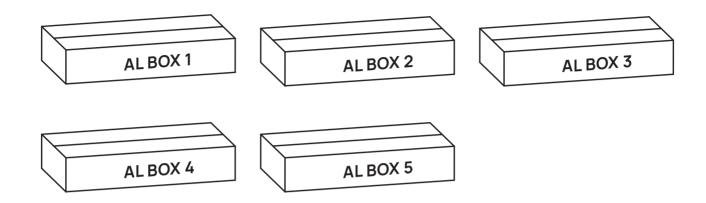

Polycarbonate Panels:




Packing List:

Please refer to documents provided in the boxes.




#### Assembly & Manitenance


- 1. Place the parts on a soft surface to avoid scratches and damage.
- 2. Loosely tighten bolts as you assemble. After the greenhouse is built, and still loosely connected, tighten all bolts completely.

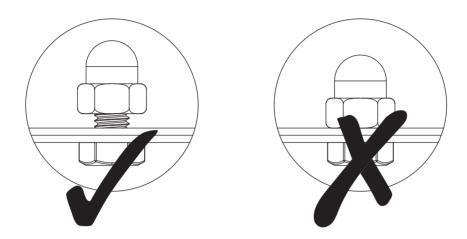

- 3. Keep the roof and gutters clear of snow, dirt and leaves in order to avoid damage to the product.
- 4. Clean the product with a mild soap and rinse with cold, clean water.
- 5. Do not use acetone, abrasive cleaners, or other special detergents to clean the product.
- 6. Remove the clear film prior to assembly. The white film indicates the UV-Protected side of the panels. Peel back the white film to expose only the edges (until the panels are in place) to ensure that the UV-Protected side is facing outwards in final assembly.

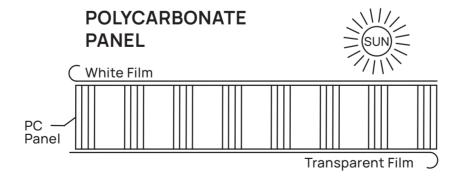

7. Cover the two cut edges of the PC panels with the provided tape before installation to seal the channels & prevent moisture from getting trapped inside.

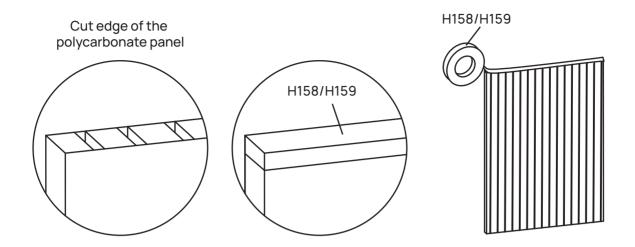




vegogarden.com


### Foundation Assembly



Choose a hard, clean, level surface to position your greenhouse. If the selected area is not level, clear and level it before beginning.

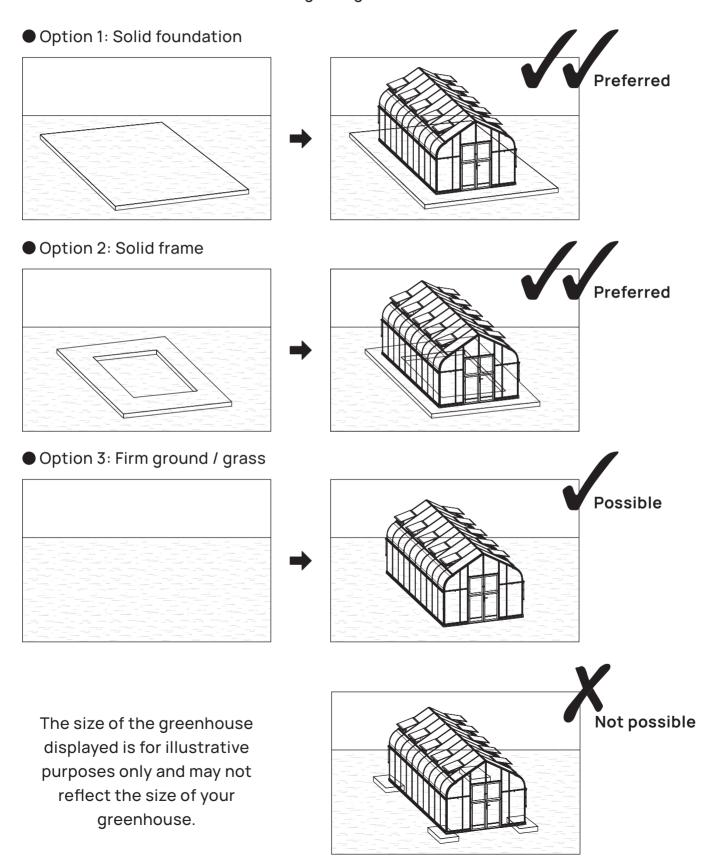


### **Foundation Dimensions**

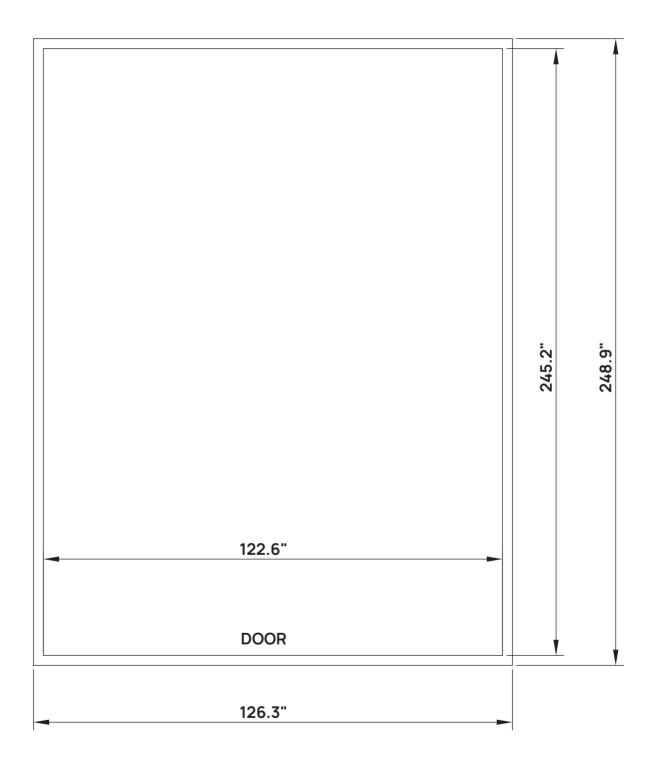




Lay out the foundation pieces as diagrammed, using the door location as a reference.

вох	PART	NO	QTY
ALBOX-2	[] 1913MM	DJ01	5
ALBOX-3	[] 1290MM	DJ02	1
ALBOX-3	[] 1245MM	DJ03	4
ALBOX-4	959MM	DJ05	2
ALBOX-5		D366	4
ALBOX-5		D73	4
ALBOX-5		D74	7
ALBOX-5		S03A M6X10	81
ALBOX-5		M24 M6	52

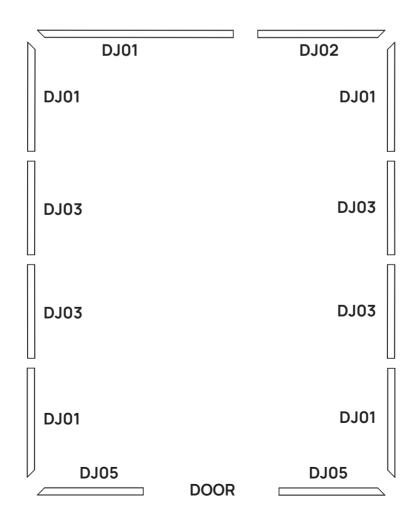


### STEP 03

Slide the heads of S03A (x37) bolts in the grooves of the frame, on the inside and outside, as shown below. These will hold the outside connectors and anchor brackets.

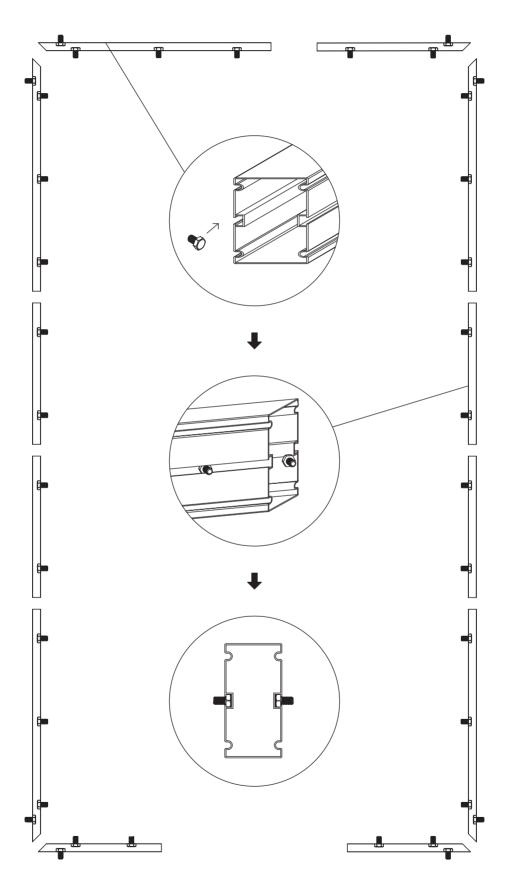


STEP 04

Assemble 7 sets of Z1 and 4 sets of Z2 connection plates by loosely installing the bolts and cap nuts.

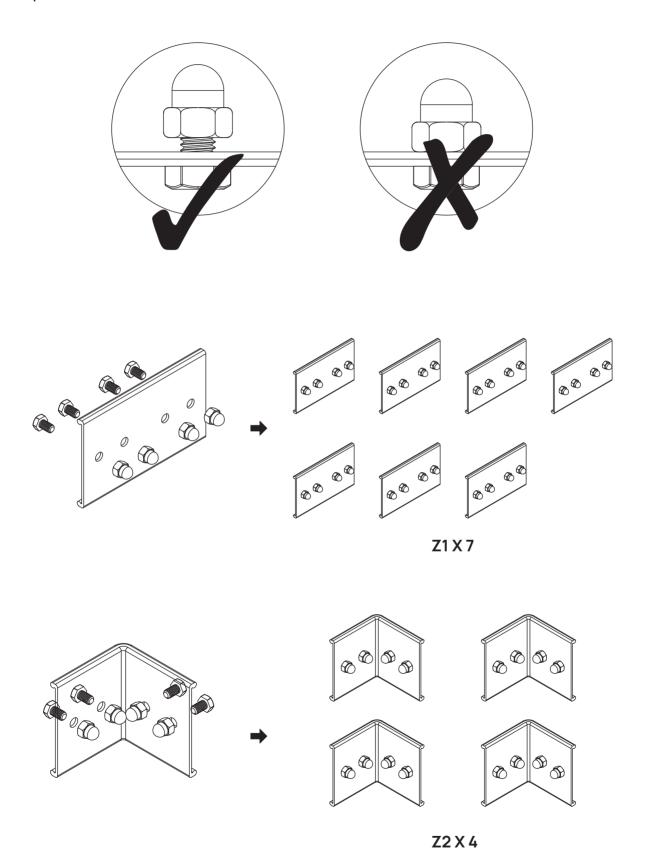


#### STEP 05

Slide Z1 & Z2 in the grooves of foundation pieces to connect each section and tighten the bolts until the frame is flush and square.

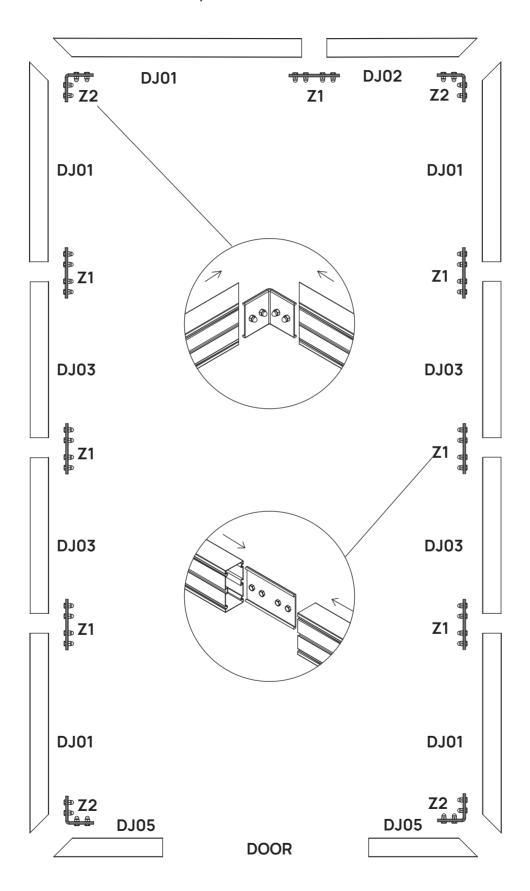



Connect the 4 corners with D366 L brackets using the previously installed S03A bolts. Secure with cap nuts.

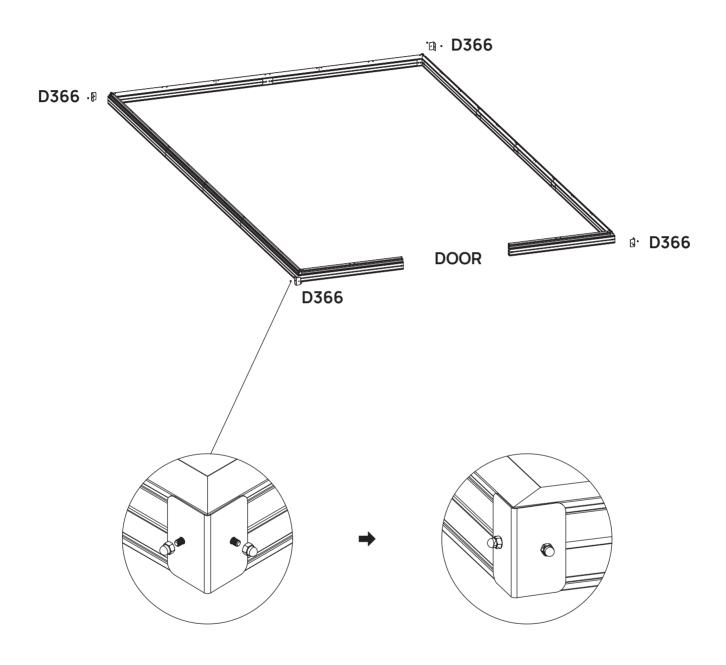


# **07**

Lay out the base frame pieces as shown in the diagram, noting that there are two types of corner pieces.

вох	PART	NO	QTY
ALBOX-4	Ы	L08A	5
ALBOX-2	占	L08B	2
ALBOX-2	Z	L08C	2
ALBOX-4		L08J	1
ALBOX-4	占	L08K	1
ALBOX-2	占	L08L	1
ALBOX-5		J196L	2
ALBOX-5	<b>B</b>	J196R	2
ALBOX-5		D76	29
ALBOX-5		D75	29
ALBOX-5	<b>©</b>	M24 M6	29
ALBOX-5		S08A M8X60	29
ALBOX-5	8	Z13A Ø5X40	29
ALBOX-5	Ø6.5X16X1.2	H79	29




vegogarden.com

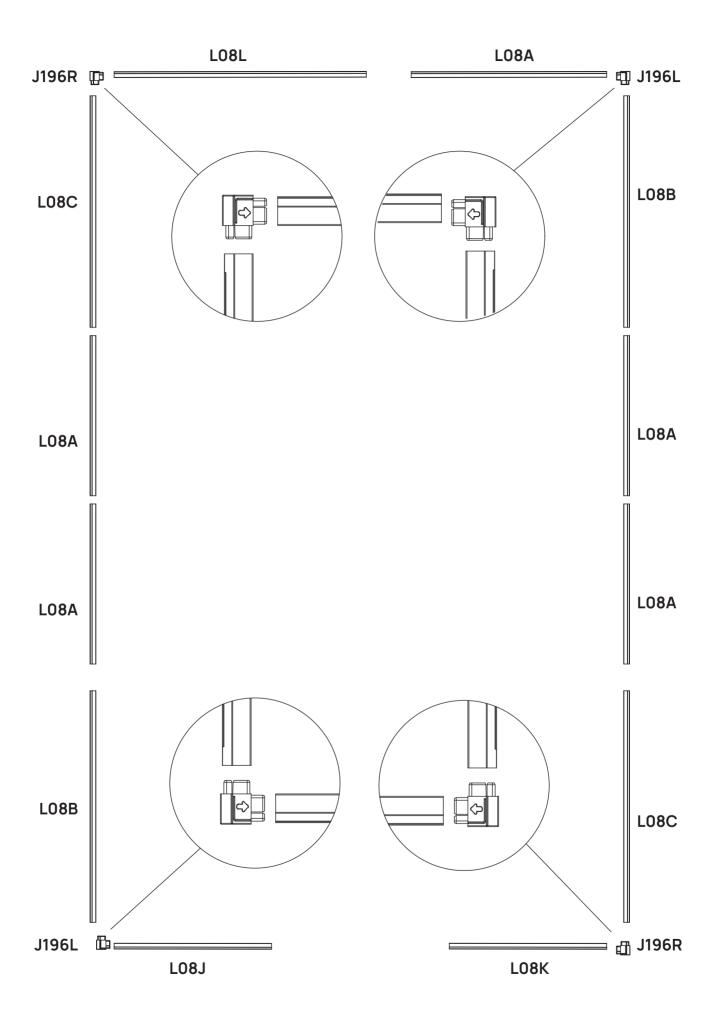





Mark 29 anchor holes on ground per the template below.

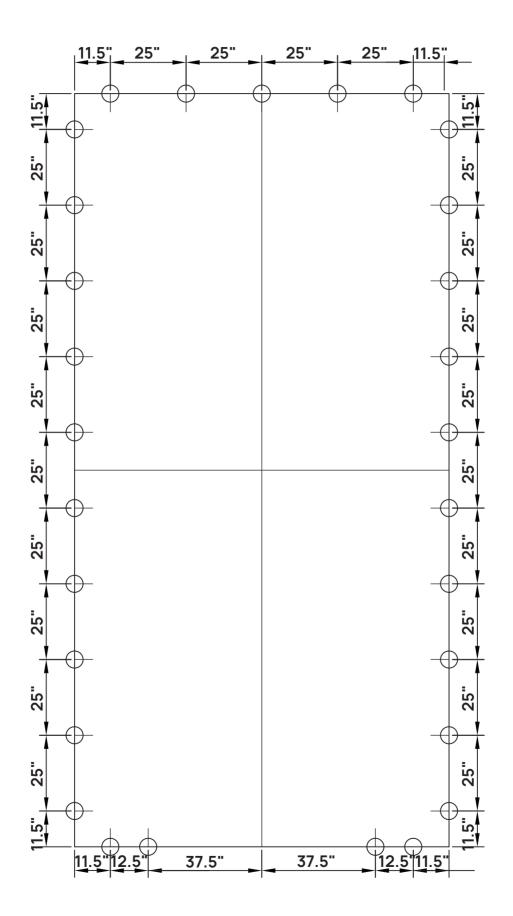




When connecting the base frame to the foundation frame, connect D75 and D76 brackets using the previously installed bolts and secure with cap nuts. Slide the assembled brackets over the marked anchor holes.

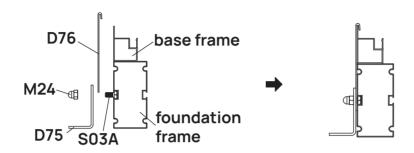


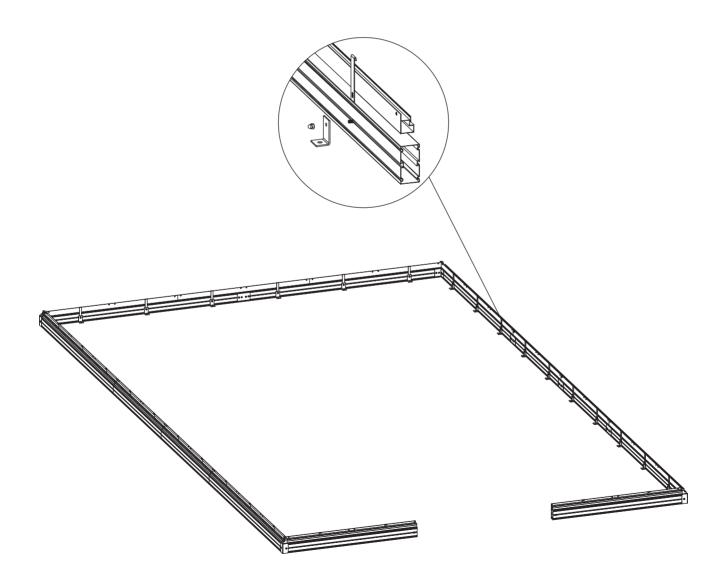

**a.** For wood surfaces, use Z13A wood screws and H79 washers to affix the base through the D75 bracket.

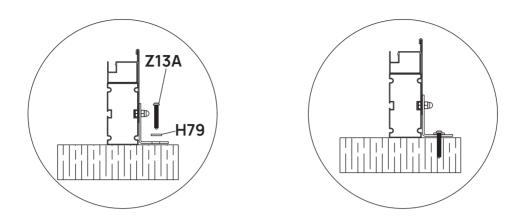

**b.** For cement surfaces, drill holes at a 2" depth with a hammer drill and 25/64" drill bit. Insert S08 expansion bolts into the holes, and attach D75 bracket using the included nuts.

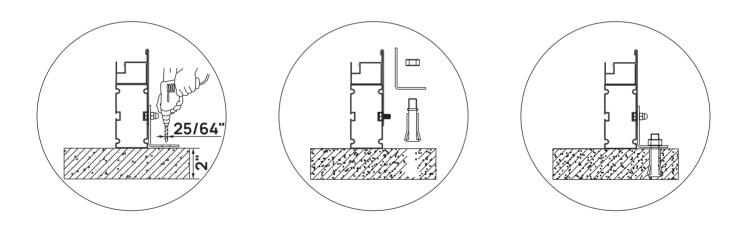

**c.** For bare ground installation, purchase heavy duty landscape stakes at least 12" long with a diameter of  $\leq 3/8$ ". Drive the stakes through the brackets and into the soil.

### **Wall Assembly**

# STEP 01


Align the L22 threshold piece with the base frame as shown in the diagram. Make a mark through each of the three holes.

BOX	PART	NO	QTY	
ALBOX-4		L22	1	
ALBOX-5		J111	2	
ALBOX-5	0	J129	3	
ALBOX-5	0	Z13 Ø5X40	3	
				J111 J111 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
		L1	14A	L22
1	L08			<b>→</b> L08

L08


L08

a. For wood surfaces, use Z13A screws to affix the threshold directly to the ground.

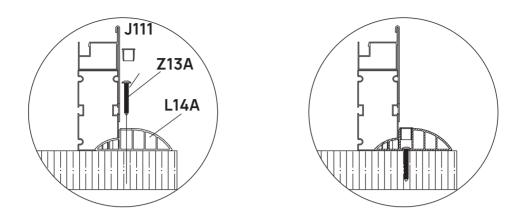

**b.** For cement surfaces, remove the threshold piece, drill pilot holes at 2.5" depth with a 5/16" drill bit, insert J129 expansion anchors into the holes, then use 13A screws to affix threshold back to the ground.

Finally use J111 caps to seal the holes.

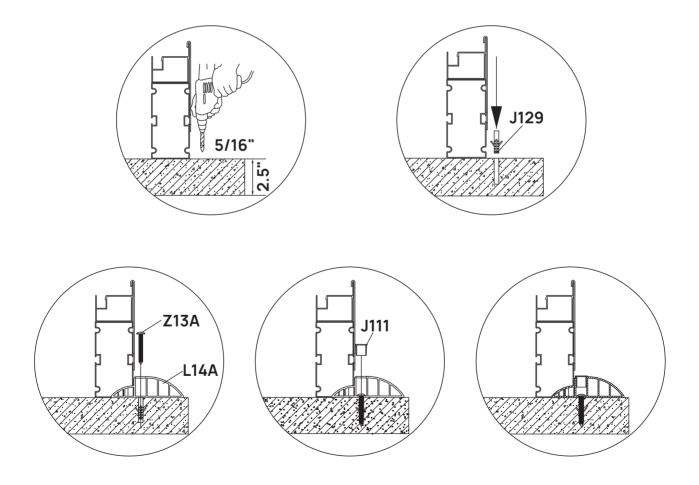



Note: The middle hole is not equipped with J111.





Assemble 2 sets of L03 door frame pieces as shown, using D470 connectors and Z17A screws. Use only one Z17A screw on the inner side of L03C and L03D as shown.

BOX	PART	NO	QTY
ALBOX-2	亞	L03C	1
ALBOX-2	25	L03D	1
ALBOX-5	35	L03F	1
ALBOX-5	35	L03G	1
ALBOX-5		D470	2
ALBOX-5	[- <u>[</u> -]	D469	2
Pre-installed		S26A M5X12	2
ALBOX-5		S99 M5X45	2
ALBOX-5		<b>Z17</b> M4.8X16	14
ALBOX-5		S03A M6X10	4
ALBOX-5	<b>©</b>	M24 M6	4

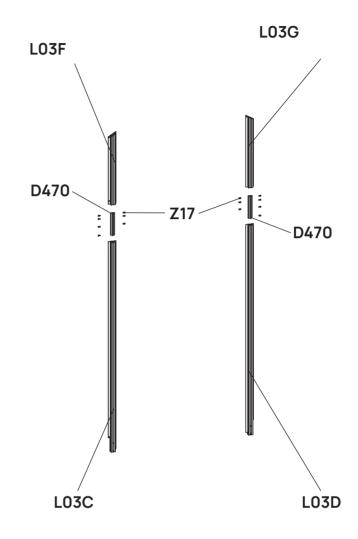

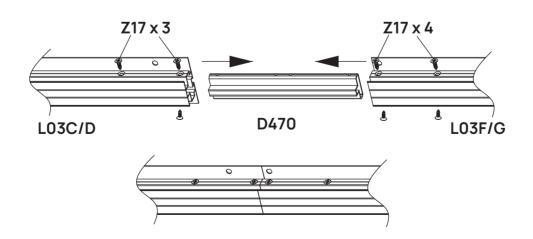

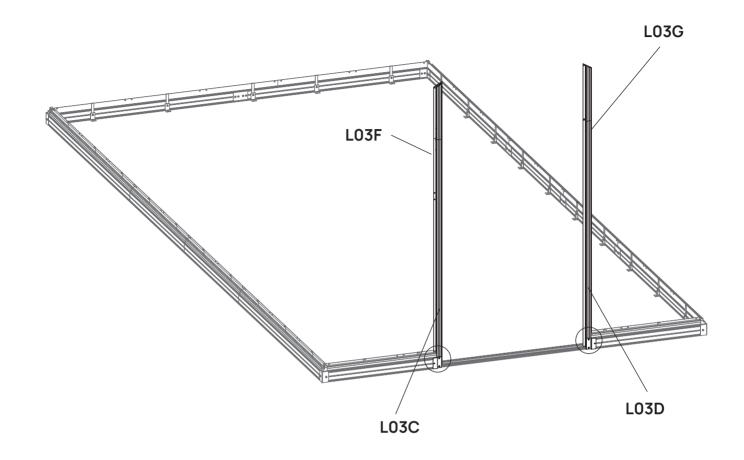

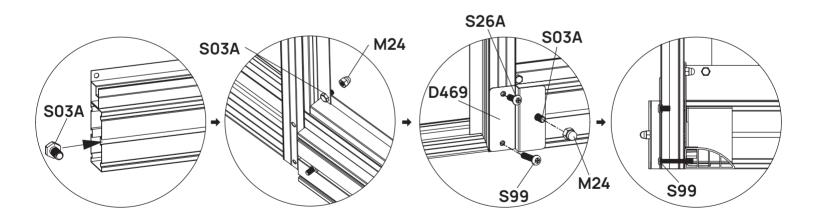


Slide one S03A in the groove of the foundation piece in the front as shown. Attach the L03 door frame to the base and foundation, secure it with the mounting plate D469, using different bolts as shown.


**Note:** S26A is pre-installed.




Assemble L01A/B curve frames on both sides as shown. Loosely attach all bolts and nuts. Do not tighten until the entire wall frame is completely assembled.

BOX	PART	NO	QTY
ALBOX-1	干	L01A	1
ALBOX-1	干	L01B	1
ALBOX-4		L05C	2
ALBOX-5		S03A M6X10	12
ALBOX-5	<b>©</b>	M24 M6	12




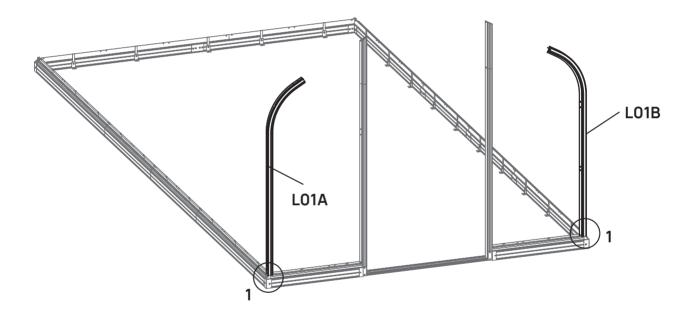


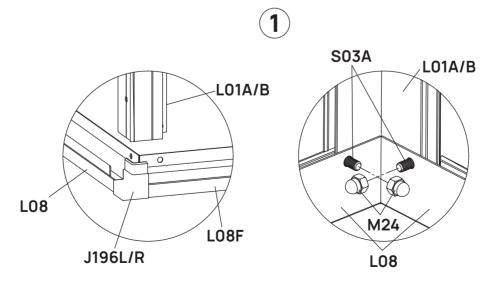



Assemble L05C inner connecting frames as shown.

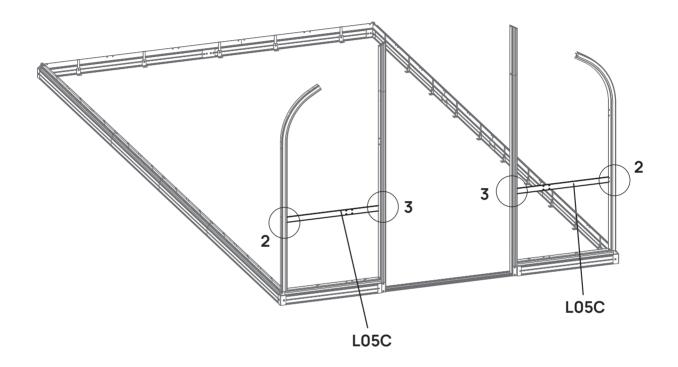


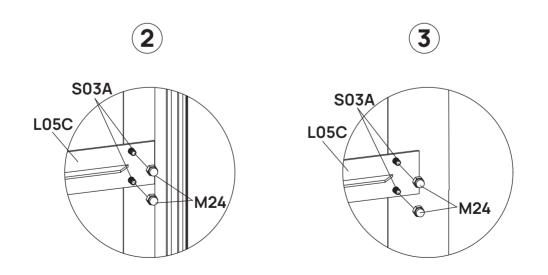




Assemble L04B frames on both sides as shown.

BOX	PART	NO	QTY
ALBOX-5	75	L04B	2
ALBOX-5		S03A M6X10	4
ALBOX-5	<b>©</b>	M24 M6	4
PCBOX-3		Y1	1
PCBOX-3		Y2	1
PCBOX-3		Y5	2
PCBOX-2	0	H158	1

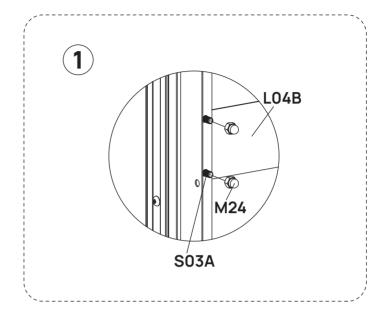

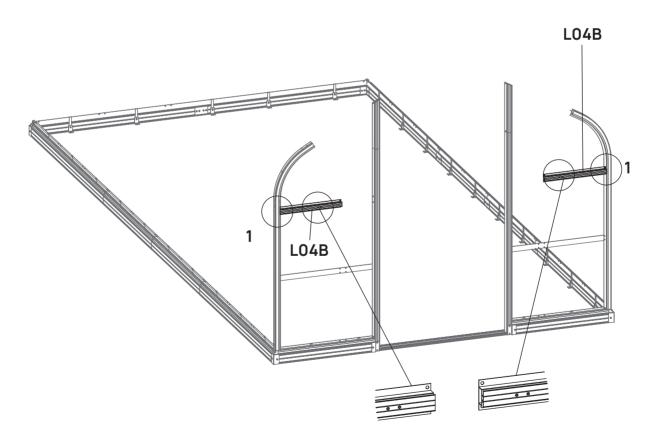


The ends of L04B with screws face to the door.




#### For PC Panels,


Remove the clear film prior to assembly. The white film indicates the UV-Protected side of the panels. Peel back the white film to expose only the edges (until the panels are in place) to ensure that the UV-Protected side is facing outwards in final assembly.

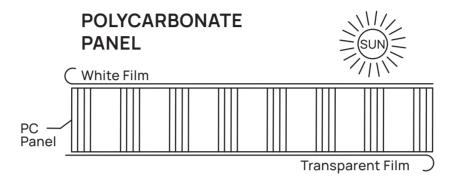

Cover the two cut edges of the PC panels with the provided tape before installation to seal the channels & prevent moisture from getting trapped inside.

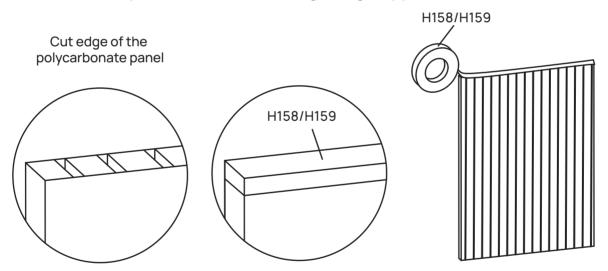

Insert Y1/2 and Y5 PC panels into place as shown.

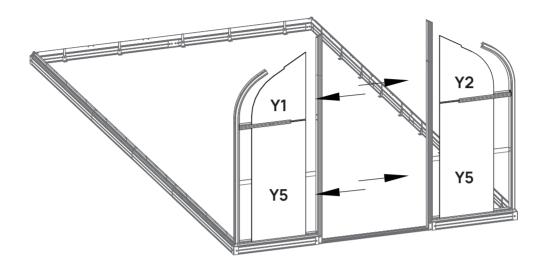





vegogarden.com

# 

Assemble L03A and L03B frames as shown.

BOX	PART	NO	QTY
ALBOX-2	75	L03A	1
ALBOX-2	75	L03B	1
ALBOX-5		S03A M6X10	16
ALBOX-5	<b>©</b>	M24 M6	16

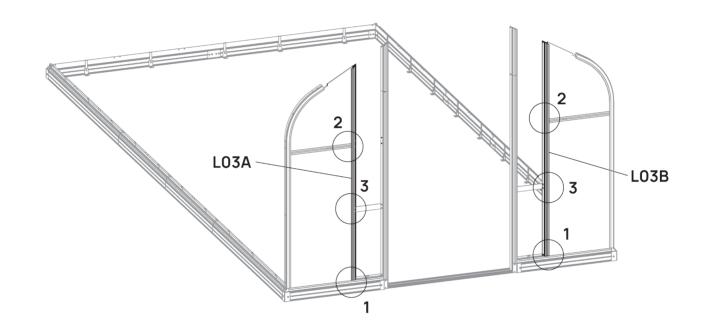


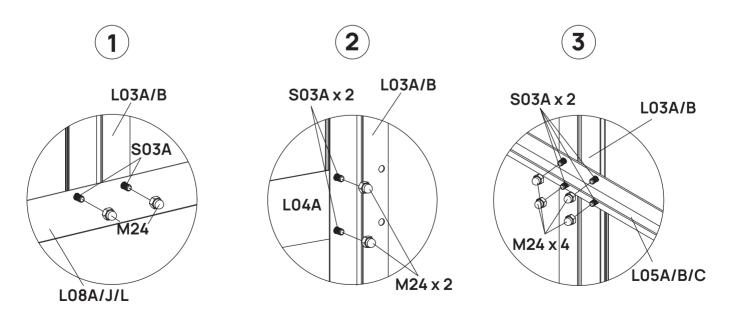


**Note:** For easier installation, use the provided hex tool.

Position the head of S03A bolt in the tool, then use it to insert the bolt into the frames and secure with M24 nut.

Repeat this process for all hard-to-access locations.

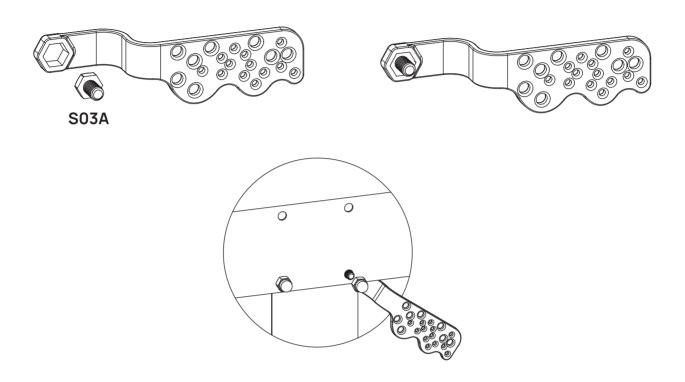


As the front panel section has been partially assembled, have it temporarily supported to prevent tipping at this stage.

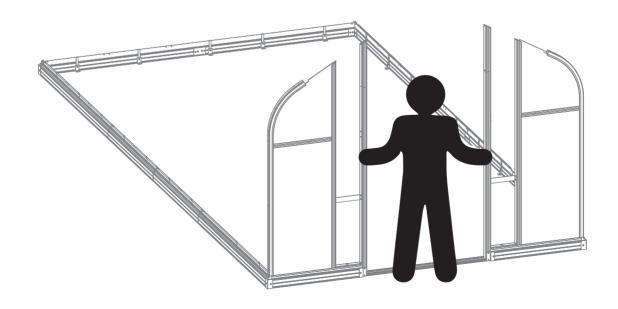





Install L01A/B and L03E frames in place as shown.


вох	PART	NO	QTY
ALBOX-1	干	L01A	1
ALBOX-1	干	L01B	1
ALBOX-3	亞	L03E	2
ALBOX-3	亞	L05A	1
ALBOX-2	<u> </u>	L05B	1
ALBOX-5		S03A M6X10	20
ALBOX-5	<b>©</b>	M24 M6	20



The end of L03E with holes face upward.

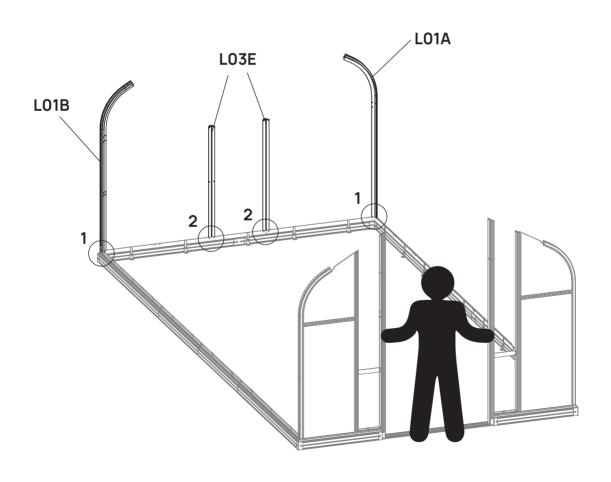


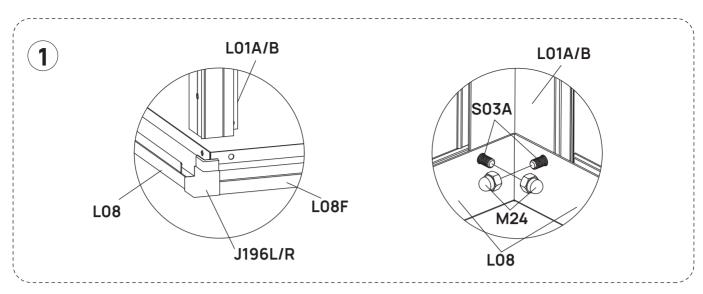

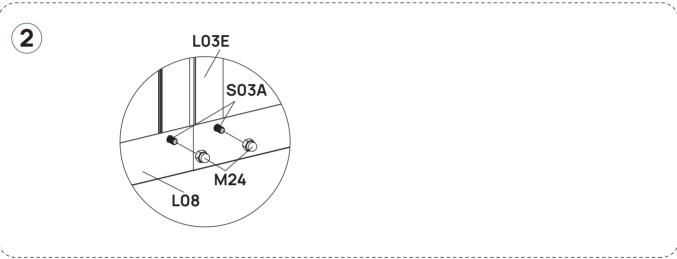




Assemble L05A/B inner connecting frames as shown.

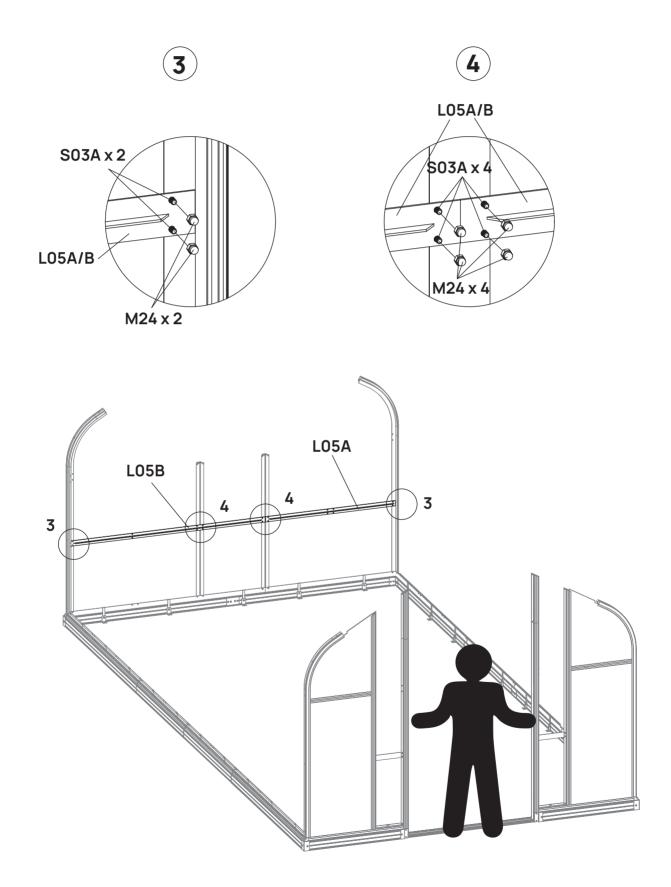




Assemble L04A frames as shown.

вох	PART	NO	QTY
ALBOX-5	凸	L04A	2
ALBOX-5		S03A M6X10	4
ALBOX-5	<b>©</b>	M24 M6	4




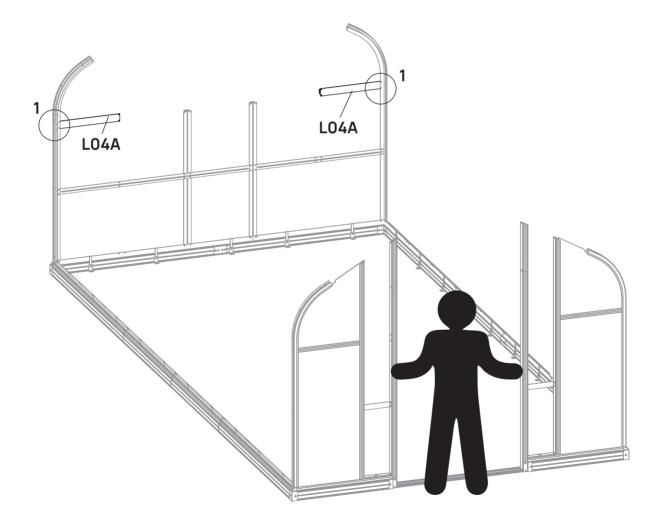




Insert Y1, Y2 and Y5 PC panels into place, then install L03A and L03B frames as shown.

вох	PART	NO	QTY
PCBOX-3		Y1	1
PCBOX-3		Y2	1
PCBOX-3		Y5	2
PCBOX-2	0	H158	1
ALBOX-2	75	L03A	1
ALBOX-2	亞	L03B	1
ALBOX-5		S03A M6X10	16
ALBOX-5	<b>©</b>	M24 M6	16

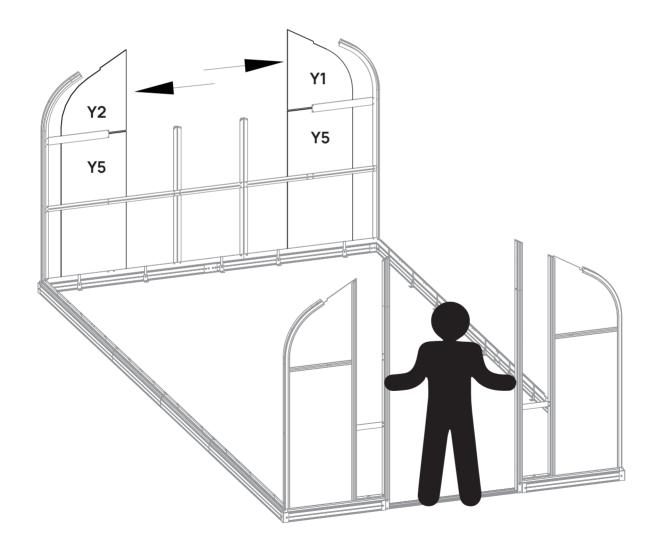

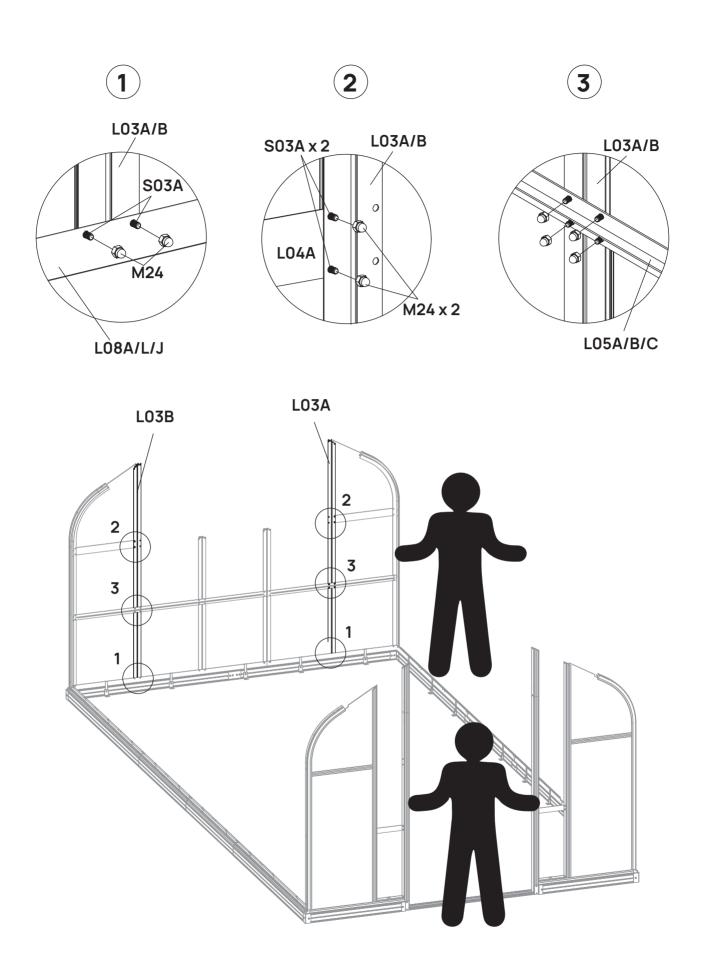



**Note:** As both front and back panel sections have been partially assembled, have them temporarily supported to prevent tipping.



Assemble the horizontal eave pieces with A139 connectors and S26A bolts as shown.


BOX	PART	NO	QTY
ALBOX-1	正	L02B	2
ALBOX-2	工工	L07C	2
ALBOX-2	五五	L07D	2
ALBOX-4	珏	L07E	4
ALBOX-5		A139	6
ALBOX-5		S03A M6X10	12
ALBOX-5	<b>©</b>	M24 M6	12
Pre-installed	<b>(</b>	S26A M5X12	24

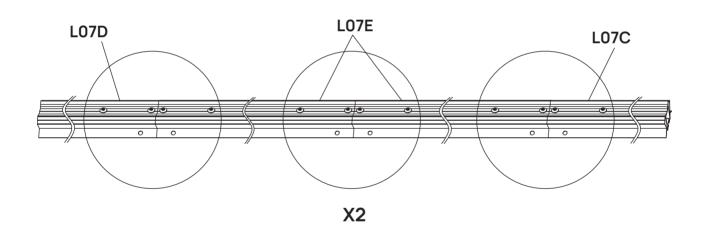






Hold the horizontal eave frames carefully and attach them to the front and back curve frames as shown.




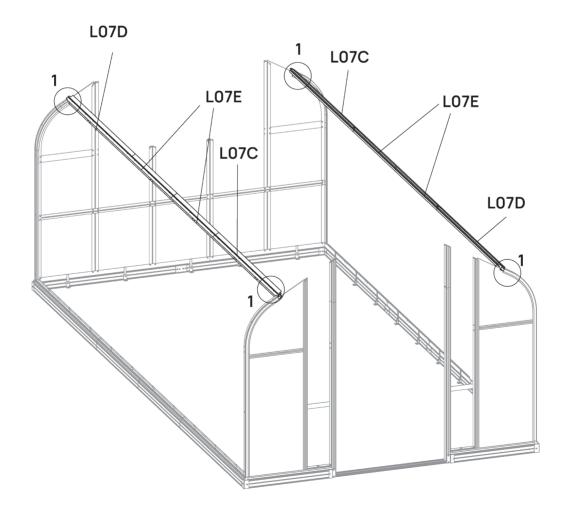



Assemble L02B curve frames as shown.


Apply silicone caulk (not included) between the gaps of each eave pieces to seal.

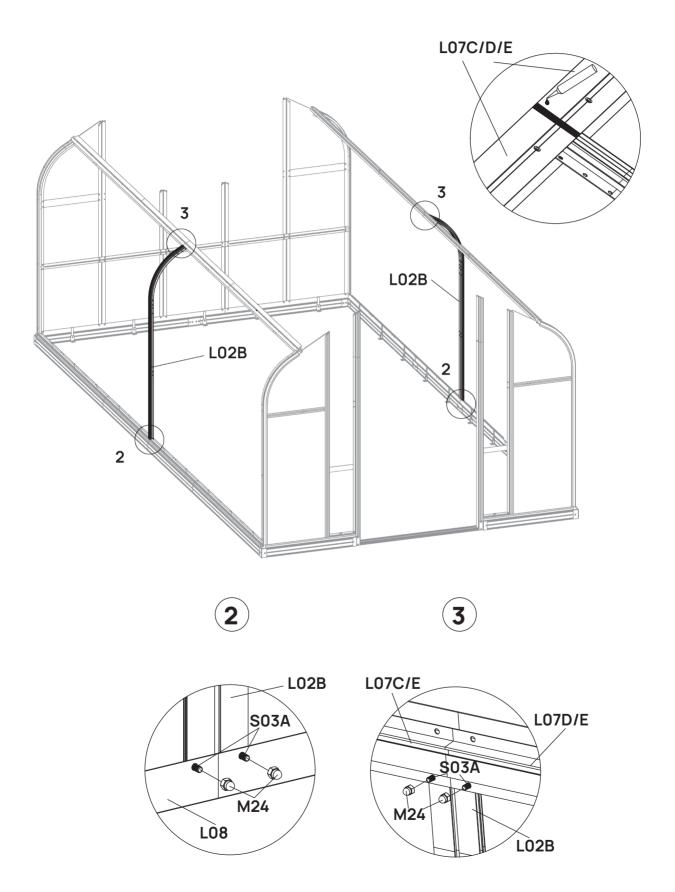




Insert Y5 and Y17 panels into place as shown.

вох	PART	NO	QTY
ALBOX-5	_25_	L04E	2
PCBOX-3		Y5	3
PCBOX-3		Y17	2
ALBOX-5		S03A M6X10	8
ALBOX-5	<b>©</b>	M24 M6	8
PCBOX-2	0	H158	1

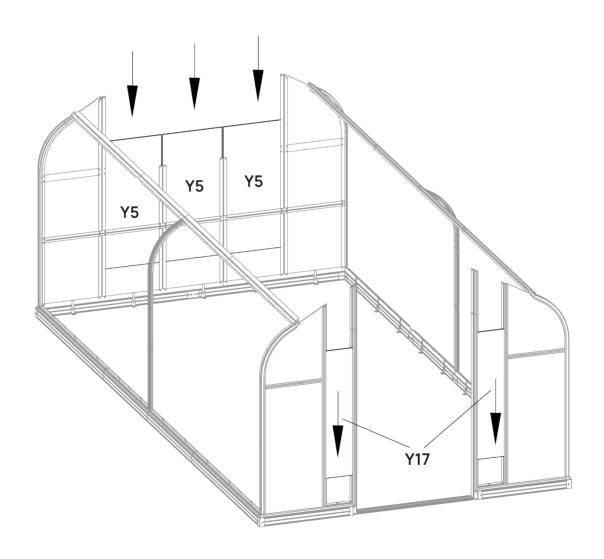




Attach L04E frames as shown.

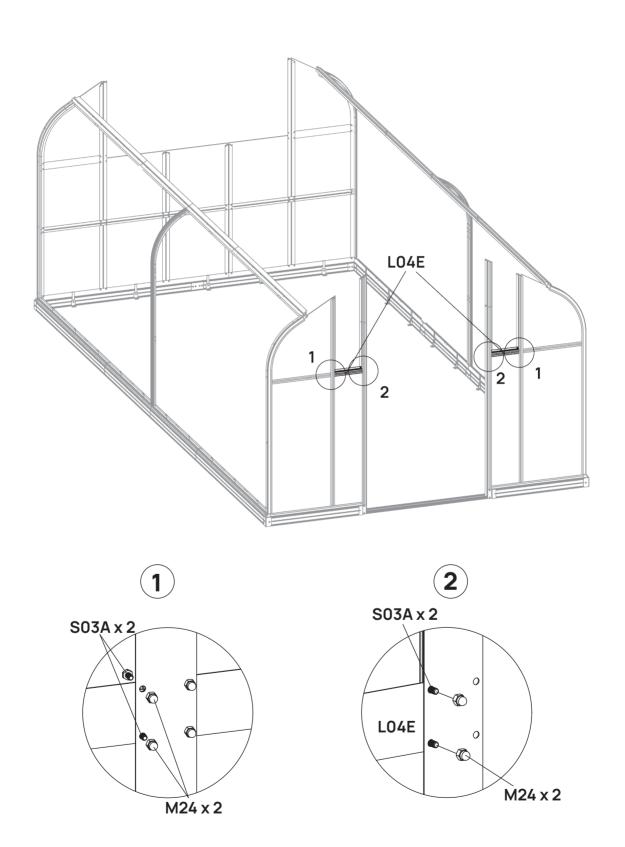






Assemble L04D frames as shown, then slide Y8 and Y5 panels into place.

вох	PART	NO	QTY
ALBOX-5	凸	L04D	4
PCBOX-3		Y5	4
PCBOX-2	$\bigcirc$	Y8	4
ALBOX-5		S03A M6X10	8
ALBOX-5	<b>©</b>	M24 M6	8
PCBOX-2	0	H158	1



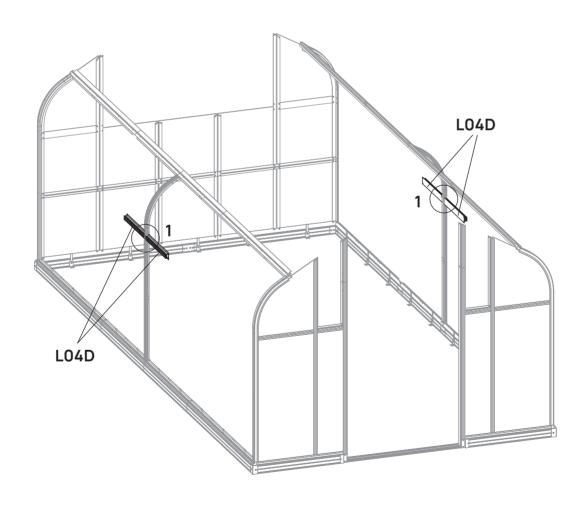

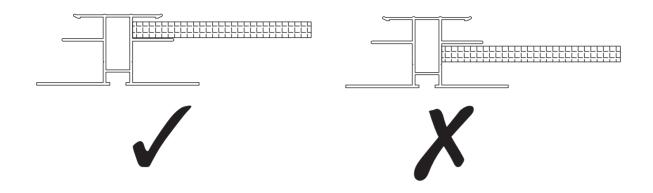


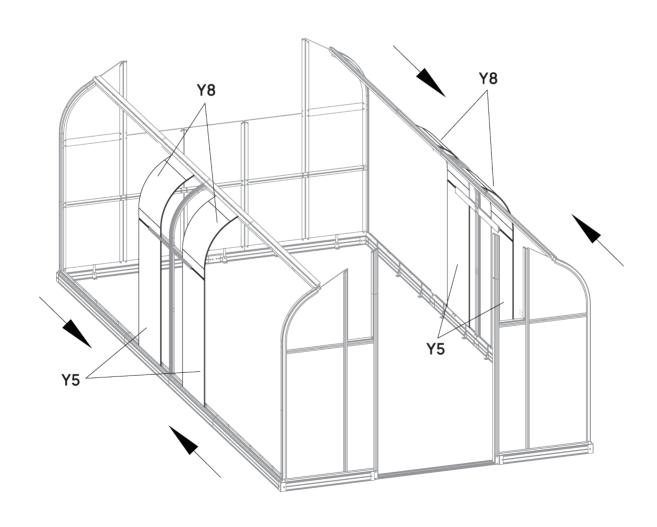



# 


Assemble more LO2B and LO4D frames on both sides as shown.

BOX	PART	NO	QTY
ALBOX-1	亚	L02B	4
ALBOX-5	凸	L04D	4
ALBOX-5		S03A M6X10	32
ALBOX-5	<b>©</b>	M24 M6	32

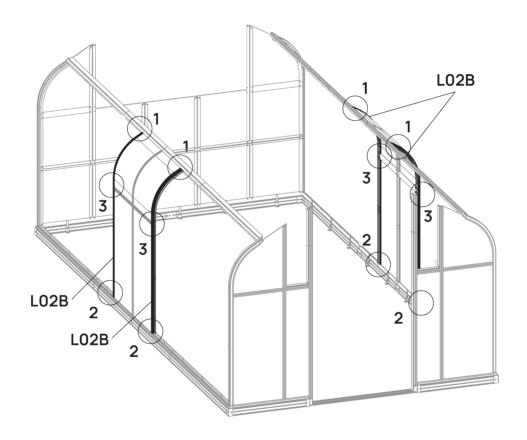

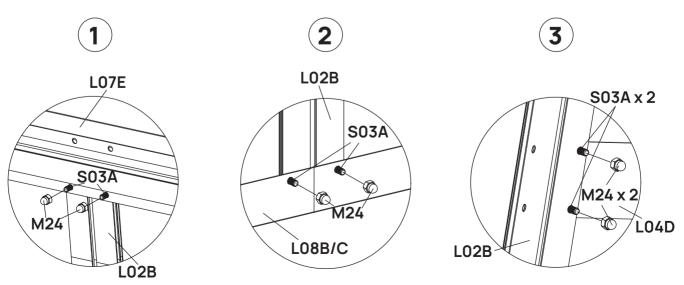




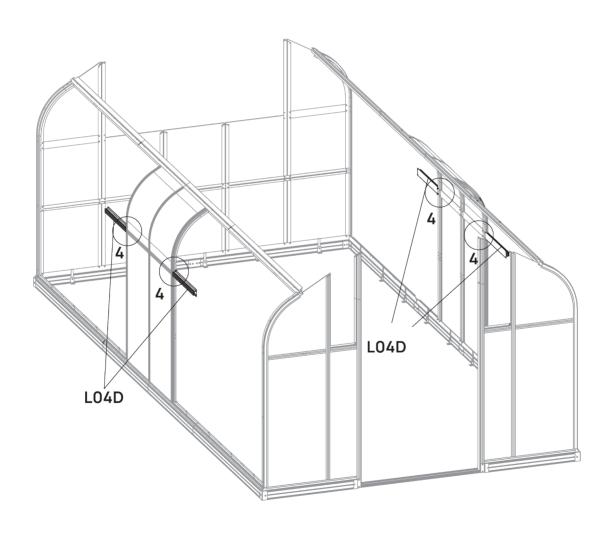





Slide more Y8 and Y5 panels into place as shown, then secure with L02B curve frames.

BOX	PART	NO	QTY
ALBOX-1	正	L02B	4
PCBOX-3		Y5	4
PCBOX-2	$\bigcirc$	Y8	4
ALBOX-5		S03A M6X10	24
ALBOX-5	<b>©</b>	M24 M6	24
PCBOX-2	0	H158	1

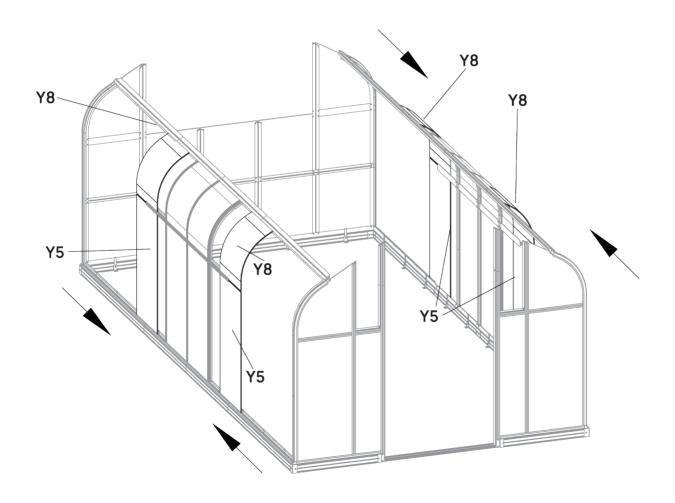

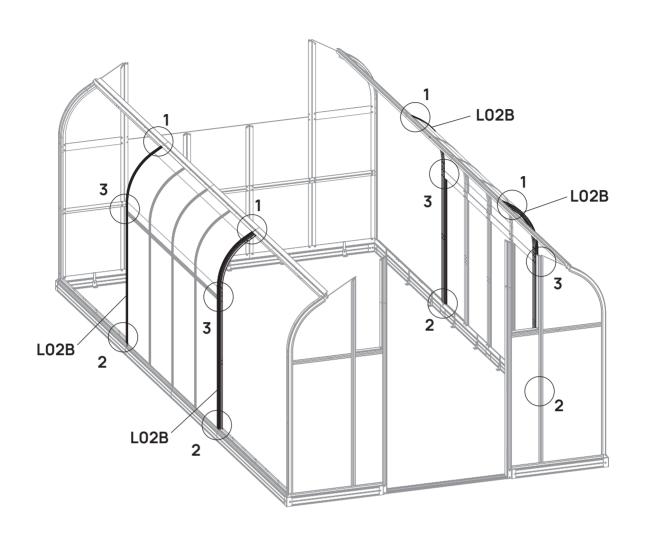


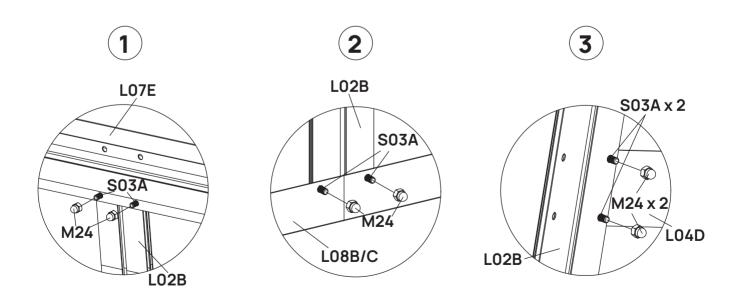



Assemble L05A inner connecting frames as shown.


BOX	PART	NO	QTY
ALBOX-3		L05A	4
ALBOX-5		S03A M6X10	32
ALBOX-5	<b>©</b>	M24 M6	32

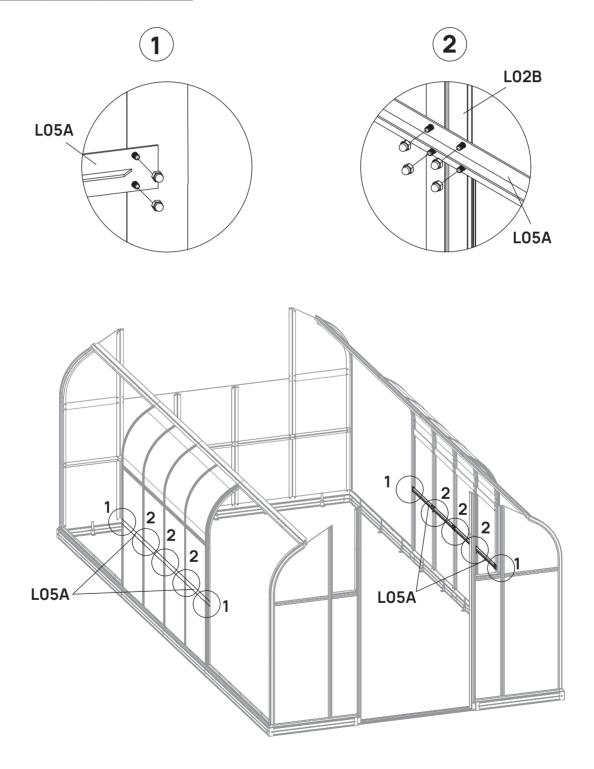



Assemble L05B inner connecting frames as shown.


BOX	PART	NO	QTY
ALBOX-2		L05B	4
ALBOX-5		S03A M6X10	16
ALBOX-5	<b>©</b>	M24 M6	16

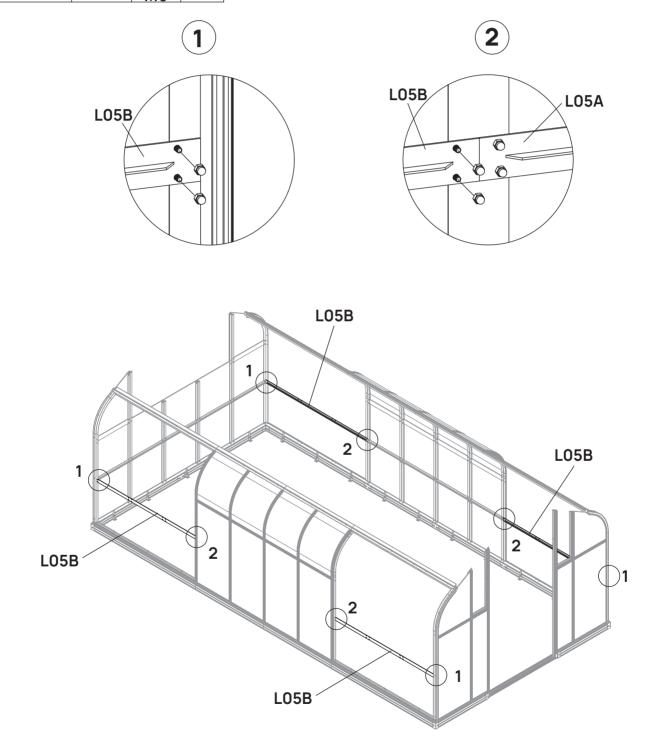





Assemble L04D frames as shown, then slide Y8 and Y5 panels into place.

BOX	PART	NO	QTY
ALBOX-5	_75_	L04D	4
PCBOX-3		Y5	4
PCBOX-2	$\bigcirc$	Y8	4
ALBOX-5		S03A M6X10	8
ALBOX-5	<b>©</b>	M24 M6	8
PCBOX-2	0	H158	1



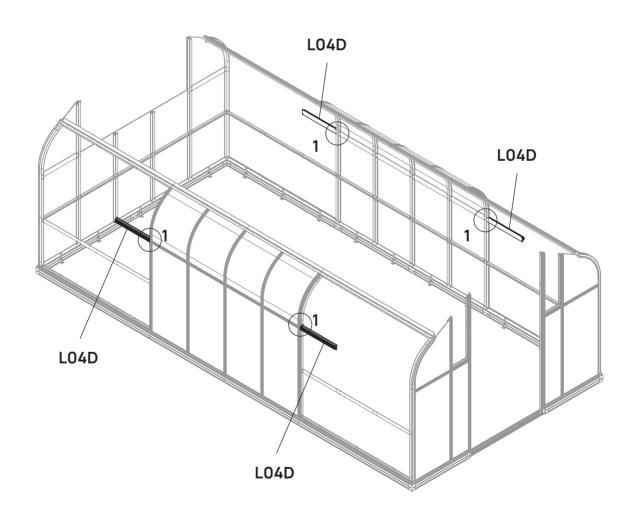

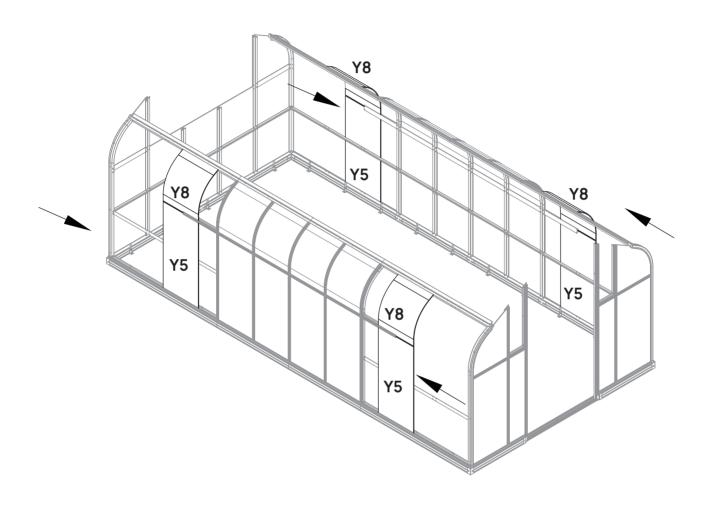





vegogarden.com



Assemble L02B curve frames as shown.

BOX	PART	NO	QTY
ALBOX-1	垂	L02B	4
ALBOX-5		S03A M6X10	40
ALBOX-5	<b>©</b>	M24 M6	40

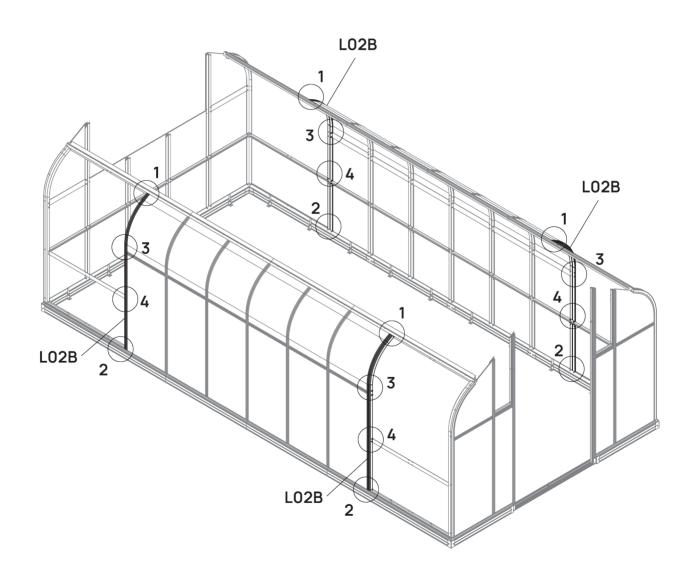

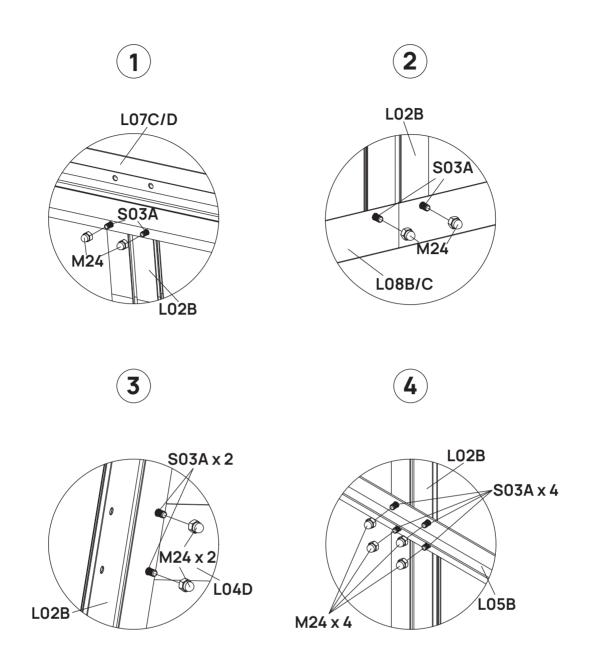





vegogarden.com





Assemble 14 sets of support braces as shown, then attach them to the curve frames.

вох	PART	NO	QTY
ALBOX-5	H	L05E	14
ALBOX-1		D467	28
Pre-installed		S01A M6X12	56
ALBOX-5		S03A M6X10	112
ALBOX-5	<b>©</b>	M24 M6	112

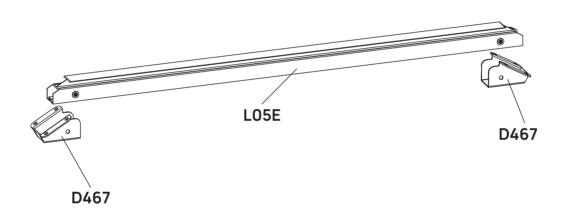

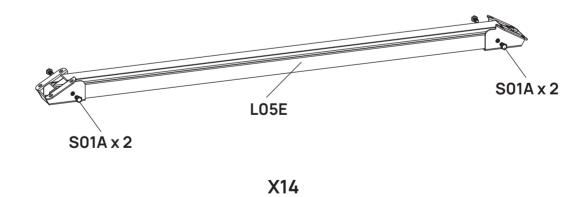




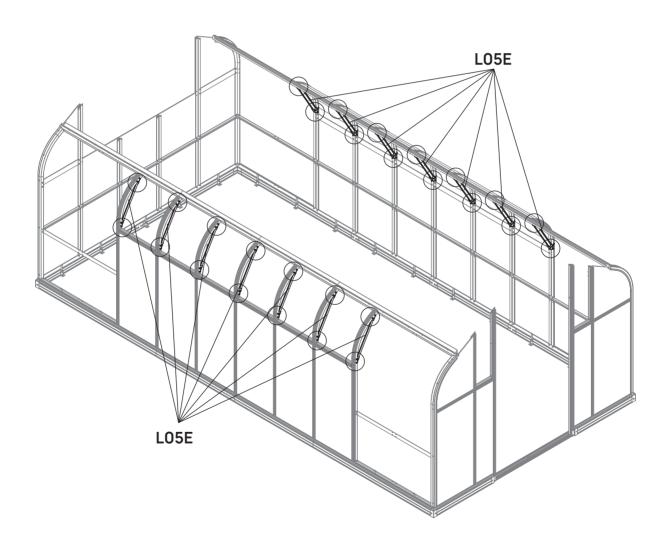




Assemble L04D and L40B frames as shown.

BOX	PART	NO	QTY
PCBOX-1	_75_	L40B	2
ALBOX-5	_75_	L04D	4
PCBOX-3		Y5	2
PCBOX-2	$\bigcirc$	Y8	4
PCBOX-3		Y20	2
ALBOX-5		S03A M6X10	10
ALBOX-5	<b>©</b>	M24 M6	10
PCBOX-2	0	H158	1

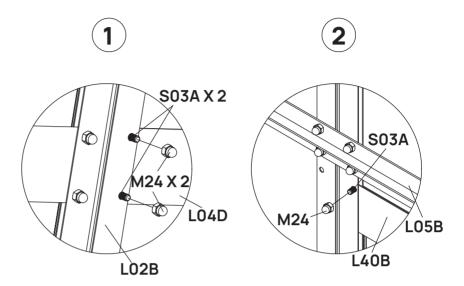


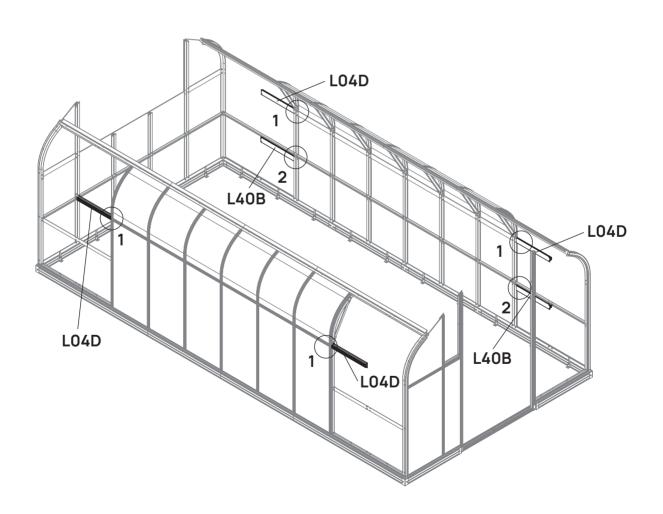

# **26**

Slide Y8, Y5 and Y20 panels into place as shown.

**Note:** The positions of Y20 panels are where the louvered windows will be installed.

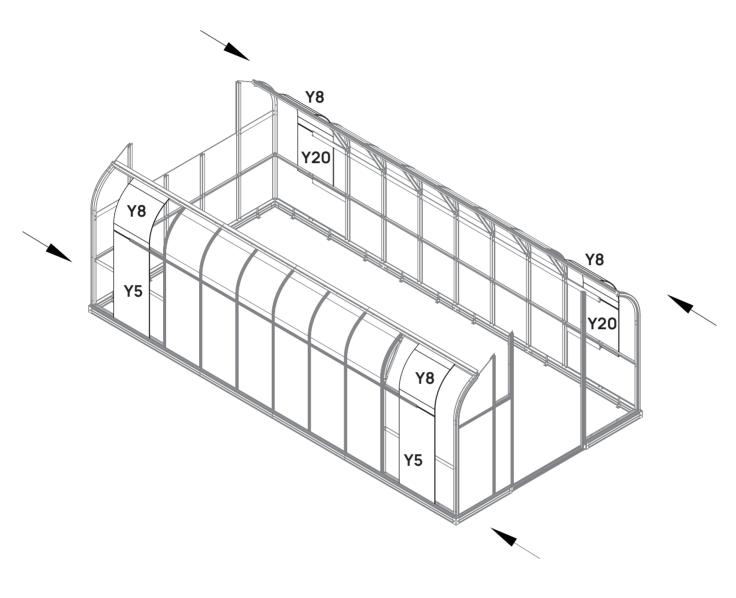





vegogarden.com




Assemble L02A curve frames as shown.

BOX	PART	NO	QTY
ALBOX-1	亚	L02A	4
ALBOX-5		S03A M6X10	42
ALBOX-5	<b>©</b>	M24 M6	42

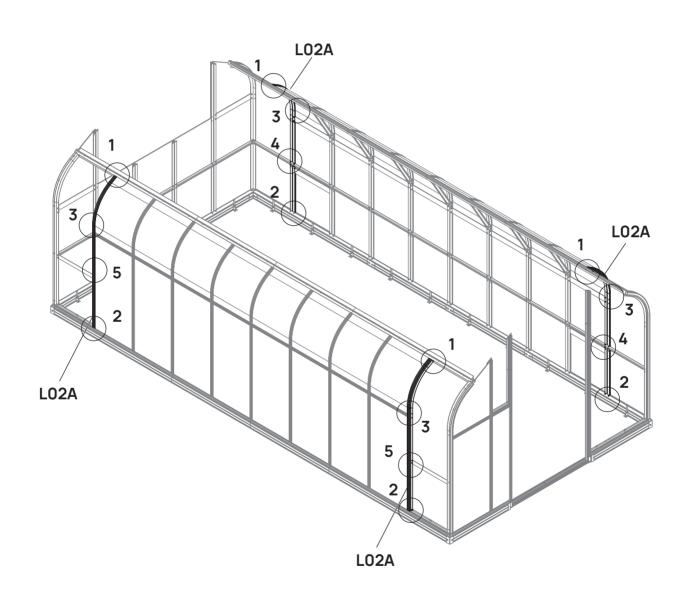

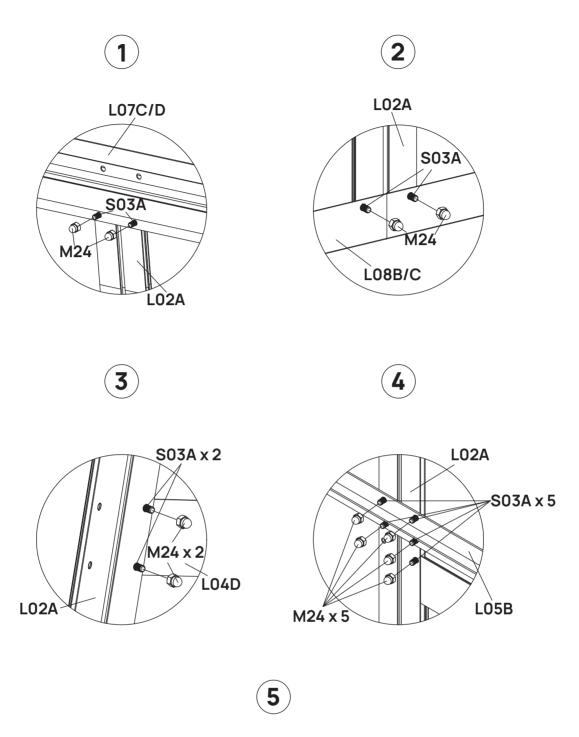







Assemble the last LO4D frames as shown, then slide the last Y8 and Y5 panels into place.

BOX	PART	NO	QTY
ALBOX-5	凸	L04D	4
PCBOX-3		Y5	4
PCBOX-2	$\bigcirc$	Y8	4
ALBOX-5		S03A M6X10	16
ALBOX-5	<b>©</b>	M24 M6	16
PCBOX-2	0	H158	1

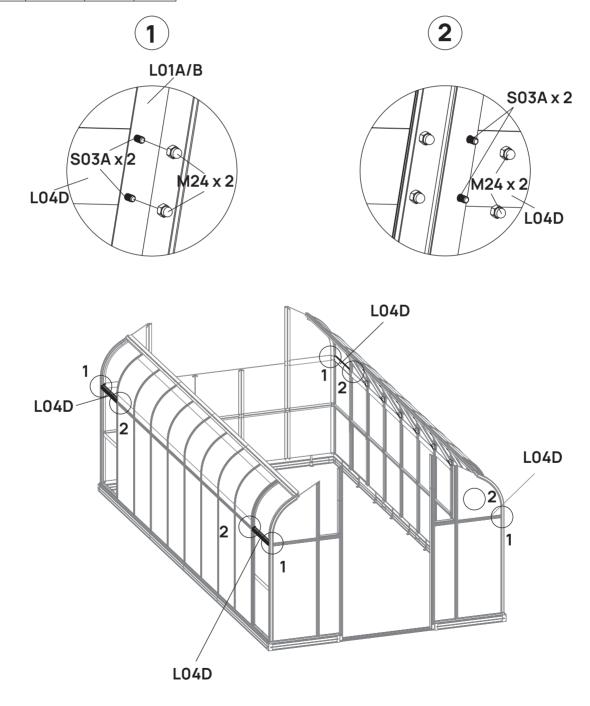

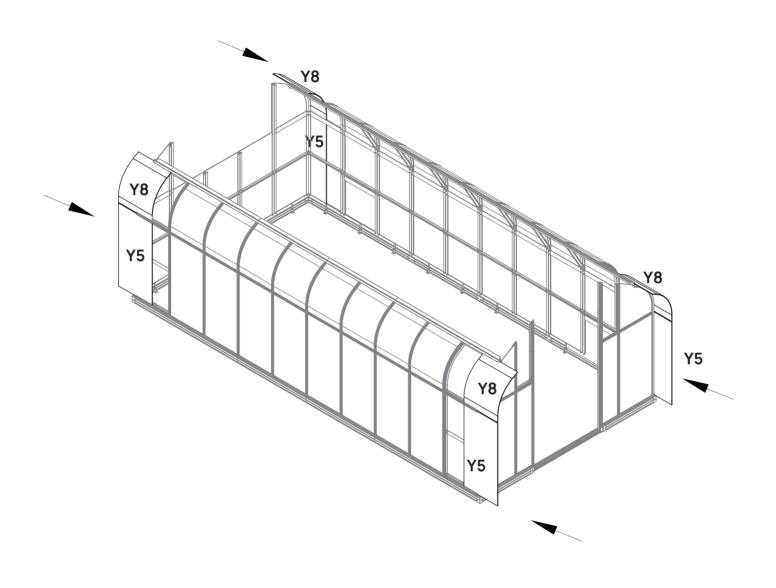




vegogarden.com




Remove the pre-installed S21A bolts from the four corner curve frames.

Attach L12A/B corner cover frames onto L01 frames to secure the outermost PC panels as shown, using the removed S21A bolts.

BOX	PART	NO	QTY
ALBOX-1		L12A	2
ALBOX-1		L12B	2
Pre-installed	<b>*</b>	S21A M6X10	20



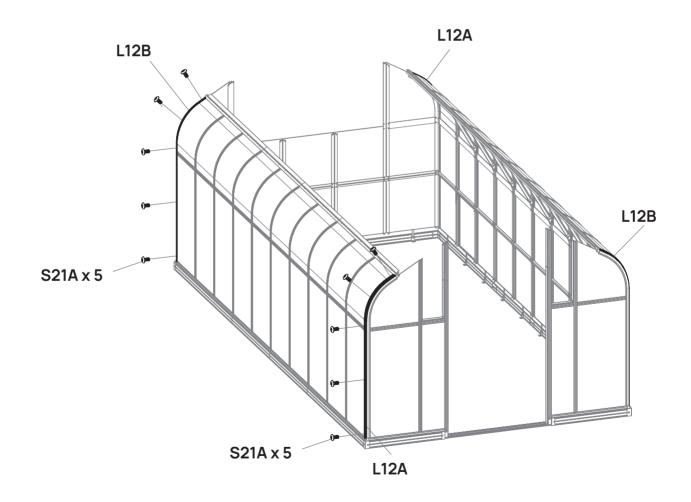




Assemble L04H/F/G and L03J/H frames as shown.


Note: Different hardware is required for top and bottom holes on L03


Top holes: S03A, M24


Bottom holes: S27A, H137, M31


BOX	PART	NO	QTY
ALBOX-3	亞	L03J	1
ALBOX-2	25	L03H	1
ALBOX-4	凸	L04F	1
ALBOX-4	_25_	L04G	1
ALBOX-4	_25_	L04H	1
ALBOX-5		S03A M6X10	16
ALBOX-5	<b>©</b>	M24 M6	16
ALBOX-5		S27A M5X12	2
ALBOX-5	<b>©</b>	M31 M5	2
ALBOX-5	0	H137	4

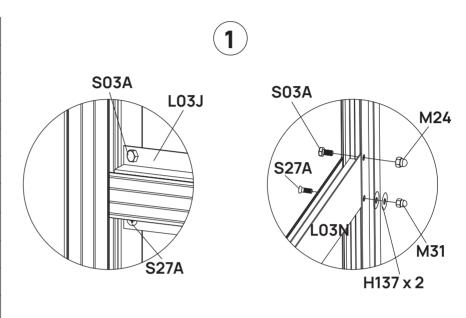

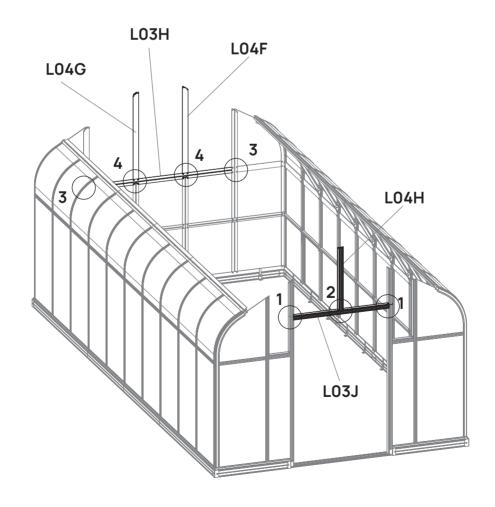

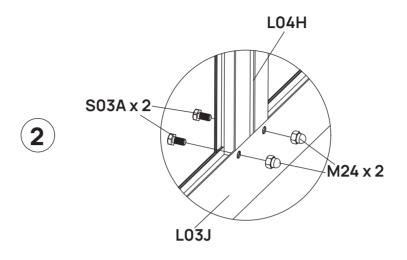

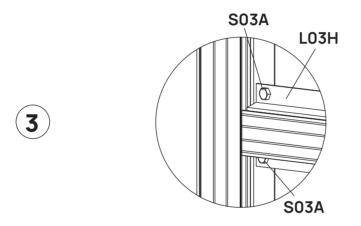


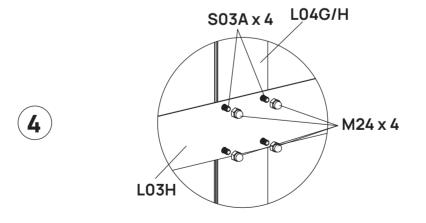





Remove the pre-installed S26A bolts from L04 frames, then attach the gutter frames onto L04 frames as shown, using S26A.

BOX	PART	NO	QTY
ALBOX-4	وبيا	L27A	4
ALBOX-2	وبيا	L27B	4
ALBOX-5	ÚS)	D25	6
ALBOX-5		S03A M6X10	12
ALBOX-5	<b>©</b>	M24 M6	12
Pre-installed	•	S26A M5X12	40




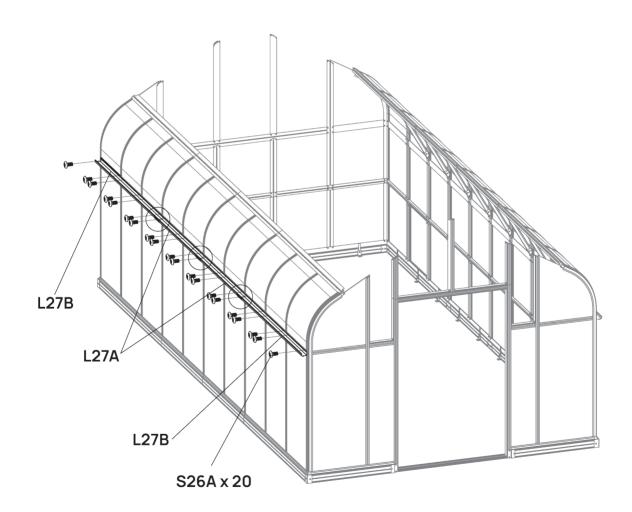


Slide S03A bolts in the grooves of the frames, position them as shown in the diagram. Secure the D25 gutter connectors with M24 nuts.

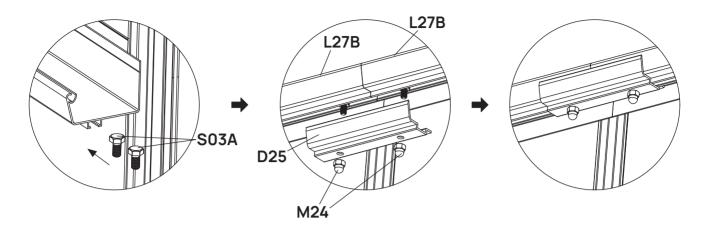

Apply silicone caulk (not provided) between the gaps of each gutter frame pieces, as well as the gaps between eave frames and gutter frames to seal.

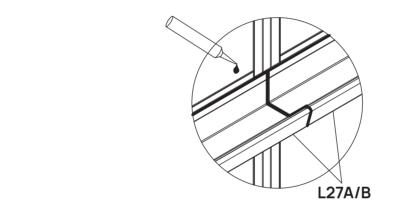


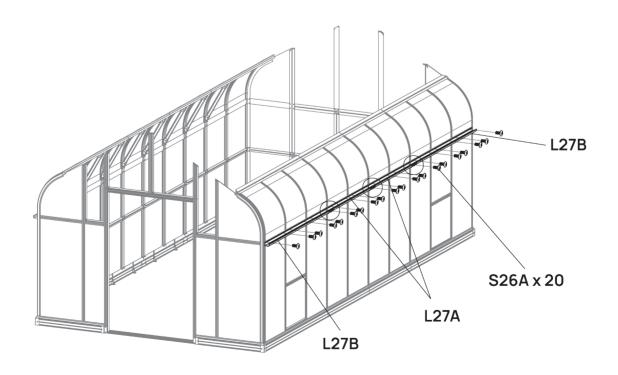




Slide the gutter cover in place as shown, test to make sure the cover can flip open easily.

BOX	PART	NO	QTY
ALBOX-4	8	L28A	4
ALBOX-2	•	L28B	4




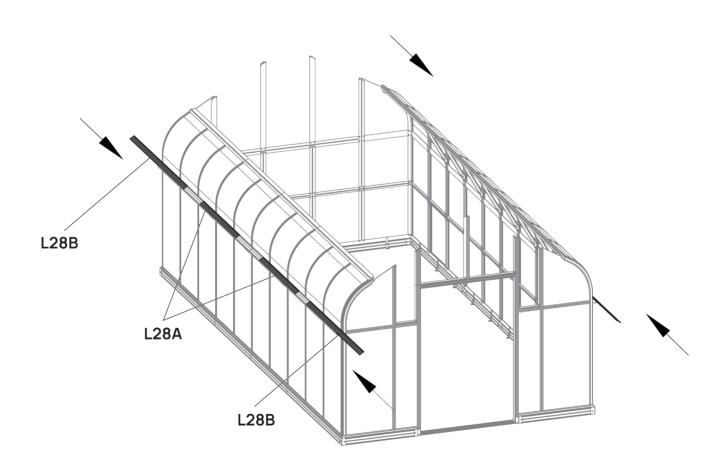





Insert the front and back gable panels as shown.

BOX	PART	NO	QTY
ALBOX-3	F	L01C	1
ALBOX-3	F	L01D	1
ALBOX-3	F	L01E	1
ALBOX-3	F	L01F	1
ALBOX-5		S03A M6X10	22
ALBOX-5	<b>©</b>	M24 M6	22
PCBOX-3		Y3	1
PCBOX-3		Y4	1
PCBOX-3		Y12	1
PCBOX-3		Y13	1
PCBOX-3		Y14	1
PCBOX-3		Y15	1
PCBOX-3		Y16	1
PCBOX-2	6	H158	1

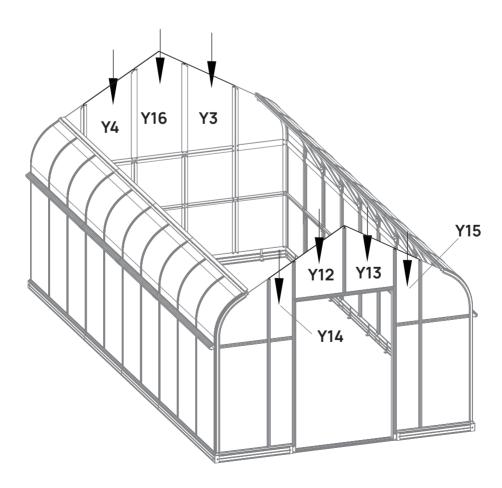

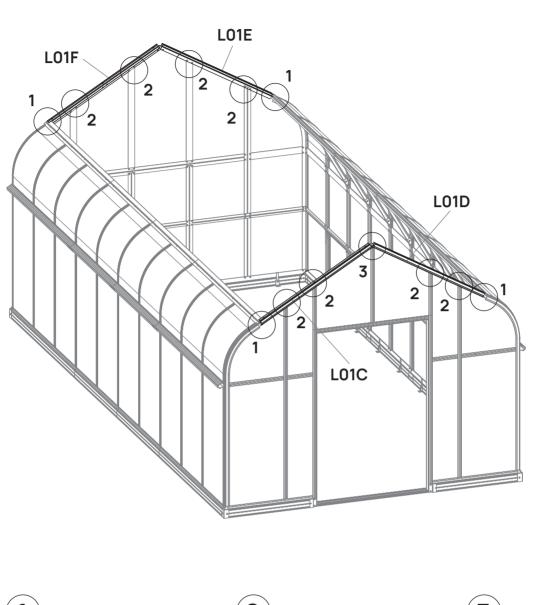

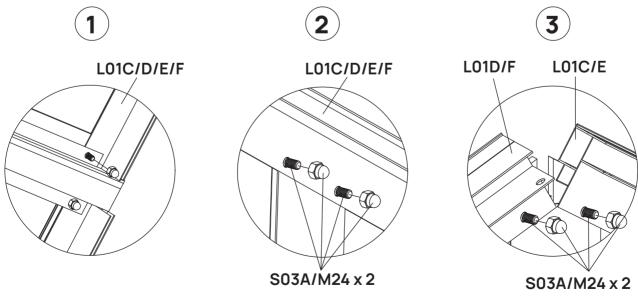





### Louvered window Assembly

Assemble the L42A and L42B frame to the K1 control frame as shown, secure with Z02A screws.

вох	PART	NO	QTY
PCBOX-1		K1	2
PCBOX-1		K2	2
PCBOX-1	4	L42A	2
PCBOX-1	4	L42B	2
PCBOX-1		L44A	24
PCBOX-1		Y41	12
PCBOX-1	<b>a</b>	D530	6
PCBOX-1		D532	2
PCBOX-1		D534	2
PCBOX-1		D535	2
PCBOX-1		D536	2
PCBOX-1	0	H232	6
PCBOX-1		Z02A Ø4X16D	8
PCBOX-1		S101 M5X8	4
PCBOX-1		S103 M5X15	4
PCBOX-1		S92 M4X1 0	4
PCBOX-1		M30 M4	4
PCBOX-1	6	M18 M5	4

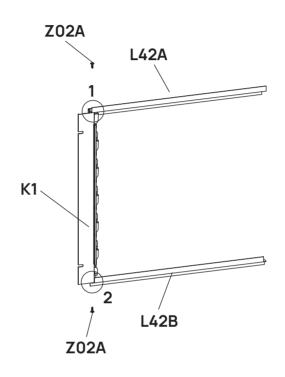


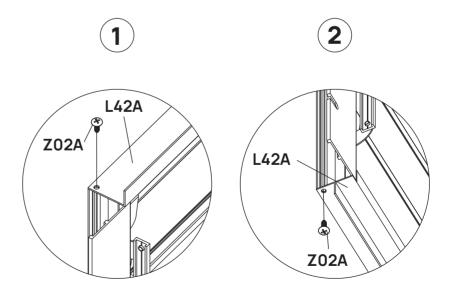




Assemble 6 sets of louver blades as shown.

Ensure the L44A trim profiles are oriented correctly - the top and bottom are symmetrical

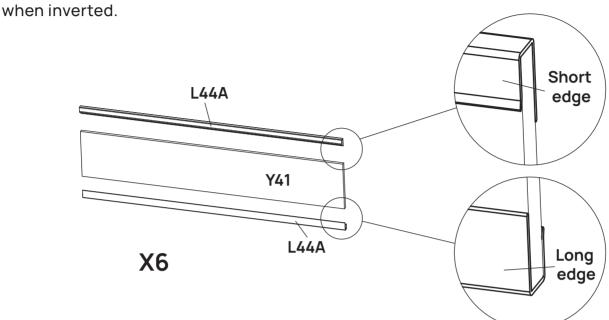


Insert all louver blades into the control frames, with the short edges of the L44A profiles facing inward and upward.

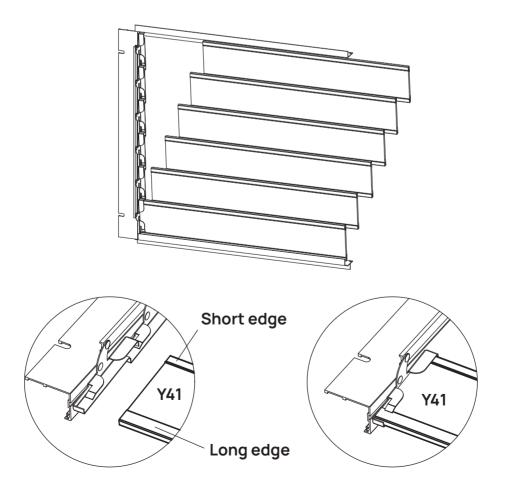


## STEP 03

Assemble the louver control handle as shown, then attach it to the K2 control frame.

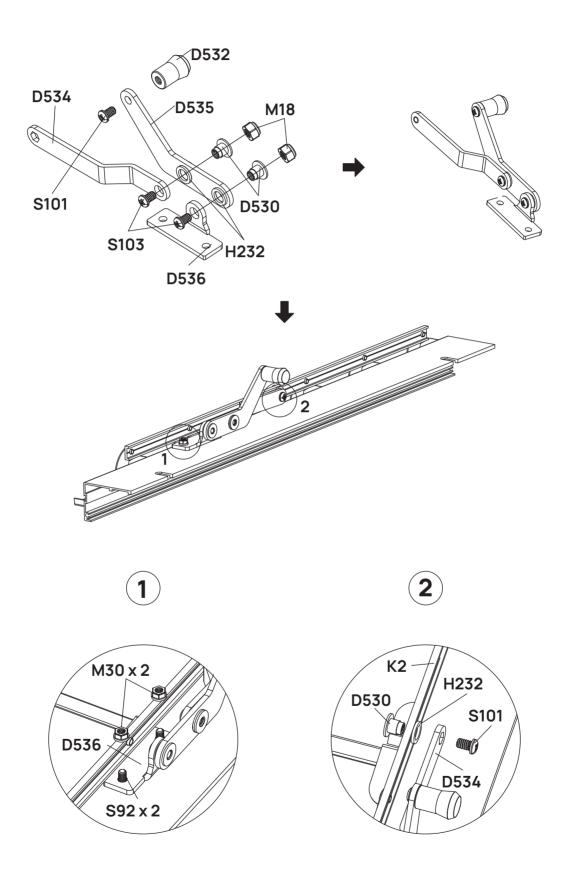


# O4

Attach K2 control frame with handle to L42 frames and blades, secure with Z02A screws as shown. Repeat these steps and assemble a total of 2 louvered windows.

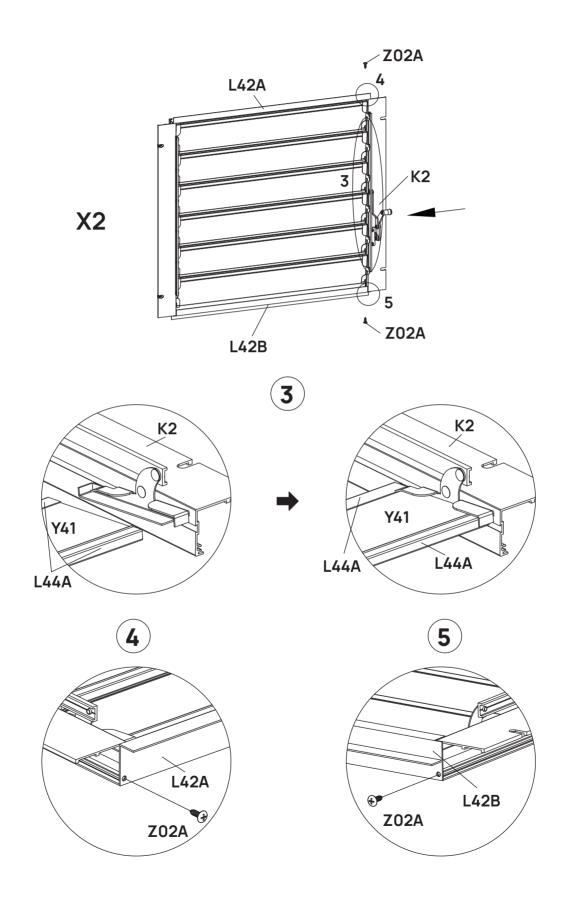


## STEP 05

Attach the 2 sets of louvered windows as shown, using S94 T-bolts and M24 nuts.

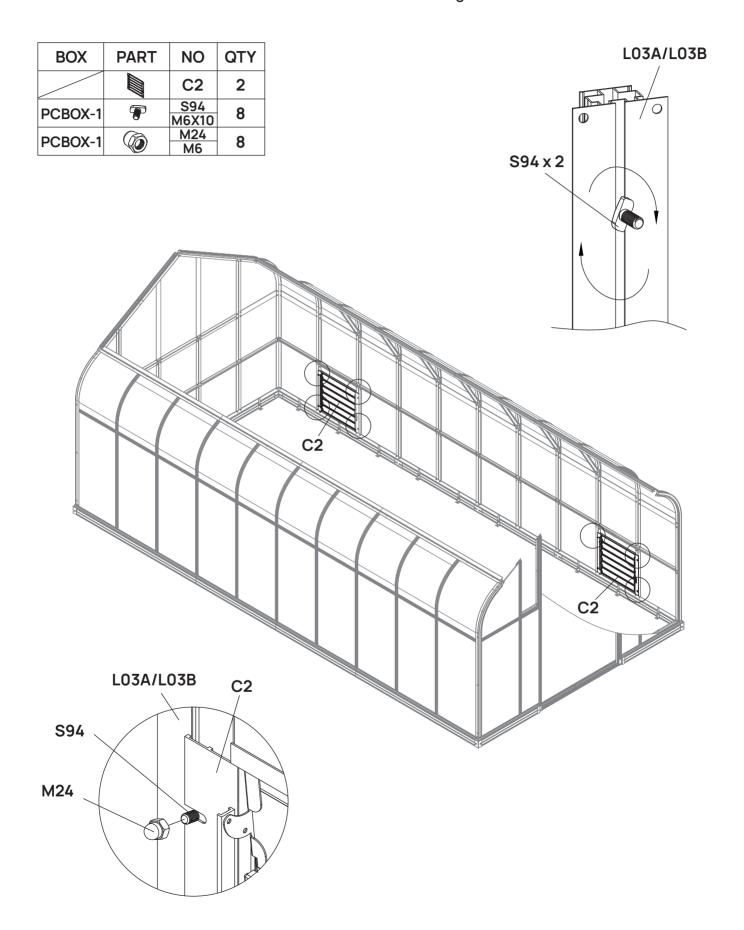

Test to make sure the louver blades could be opened and closed smoothly with the handle.

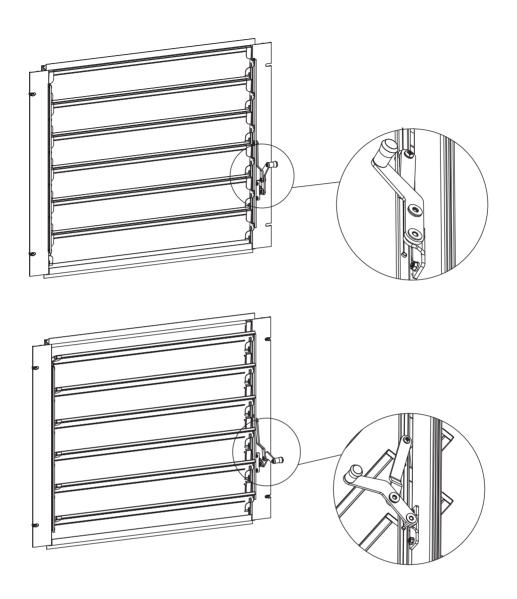




vegogarden.com


## **Roof Assembly**




Assemble 3 sets of roof rafter pieces with D348 brackets, then attach support bars to the rafters as shown.


вох	PART	NO	QTY
ALBOX-3	亚	L02E	6
ALBOX-4	H	L05F	3
ALBOX-5		D348	6
ALBOX-1		D467	6
ALBOX-5		S03A M6X10	72
ALBOX-5	<b>©</b>	M24 M6	72
Pre-installed		S01A M6X12	12

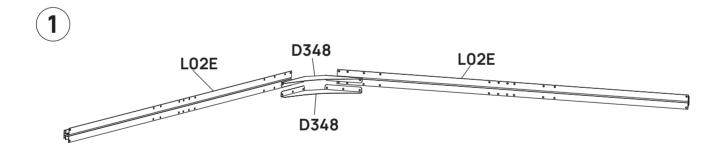


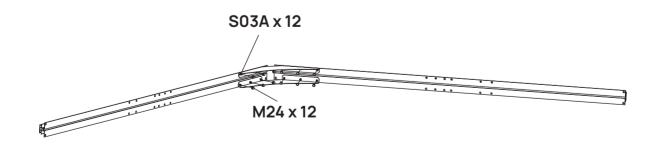



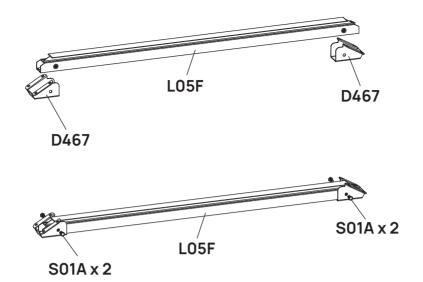


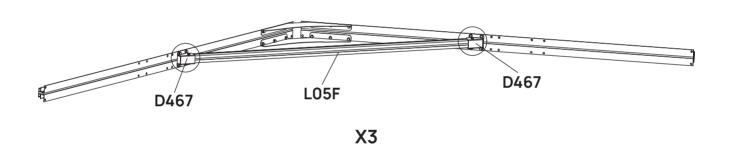





Attach the roof rafters to the eave frames as shown.

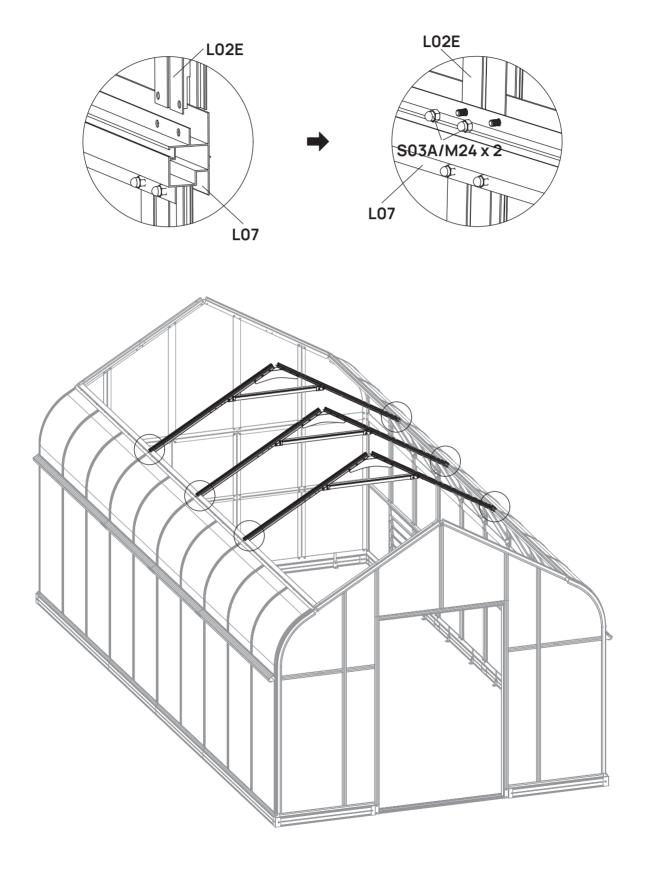




Assemble ridge frames on the roof rafters as shown.

				_
BOX	PART	NO	QTY	
ALBOX-3		L05A	4	<b>(1</b> )
ALBOX-2		L05B	4	L06B L06A/B
ALBOX-4	TX.	L06A	2	L02E
ALBOX-2	<b>A</b>	L06B	2	
ALBOX-5		D26	3	
ALBOX-5		S03A M6X10	48	
ALBOX-5	<b>©</b>	M24 M6	48	
ALBOX-5	•	M24 M6 Z08A M4.2X16	6	LOOP
				S03A/M24 x 2
				1 L06B L06A L06B




Secure the D26 ridge cap with Z08A screws to reinforce the ridge structure.

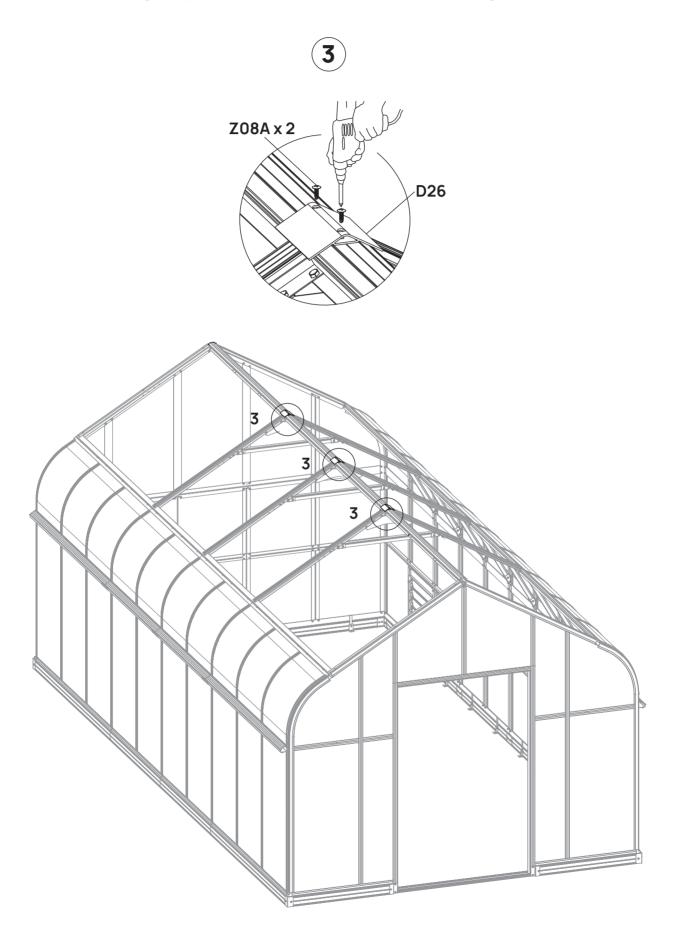




Assemble L05 roof connecting frames as shown.

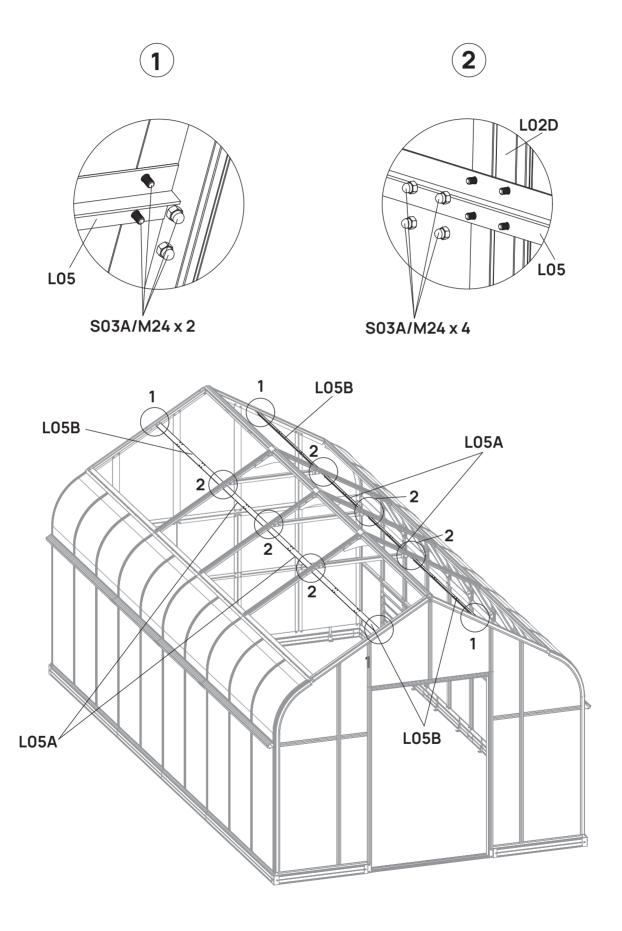






Assemble the rest of LO2C and LO2D roof rafters as shown.

BOX	PART	NO	QTY
ALBOX-3	亚	L02C	4
ALBOX-3	亚	L02D	8
ALBOX-5		S03A M6X10	96
ALBOX-5	<b>©</b>	M24 M6	96

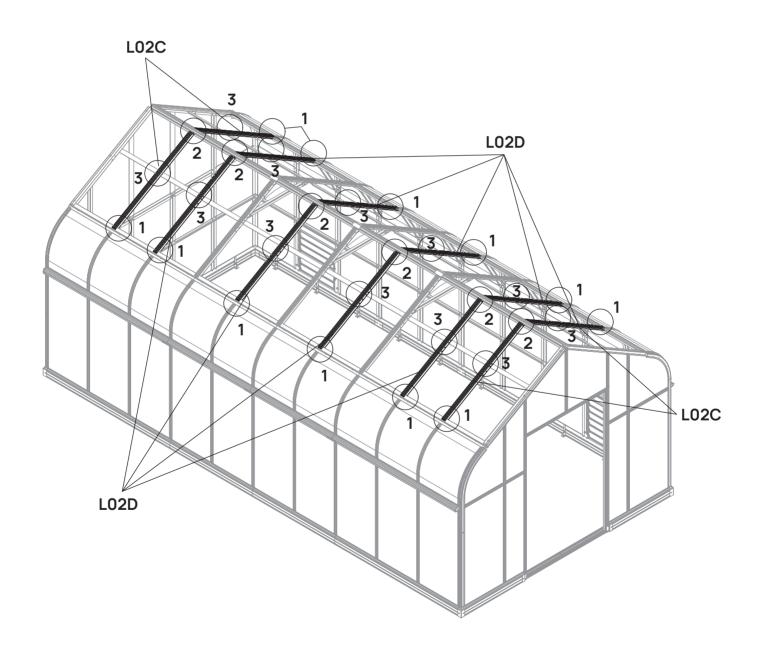

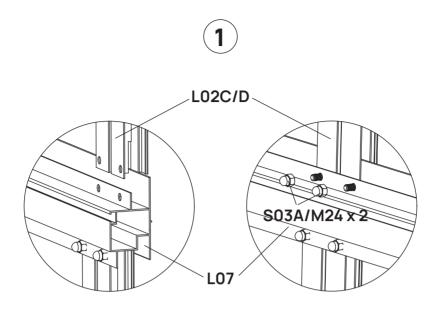









Assemble the rest of support bars, then attach them to the rafters as shown.

BOX	PART	NO	QTY
ALBOX-4	H	L05F	4
ALBOX-1		D467	8
Pre-installed		S01A M6X12	16
ALBOX-5		S03A M6X10	32
ALBOX-5	<b>©</b>	M24 M6	32

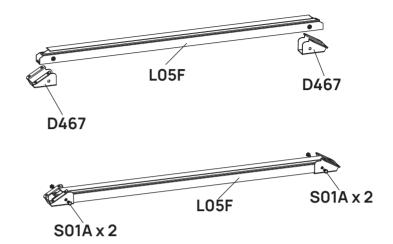

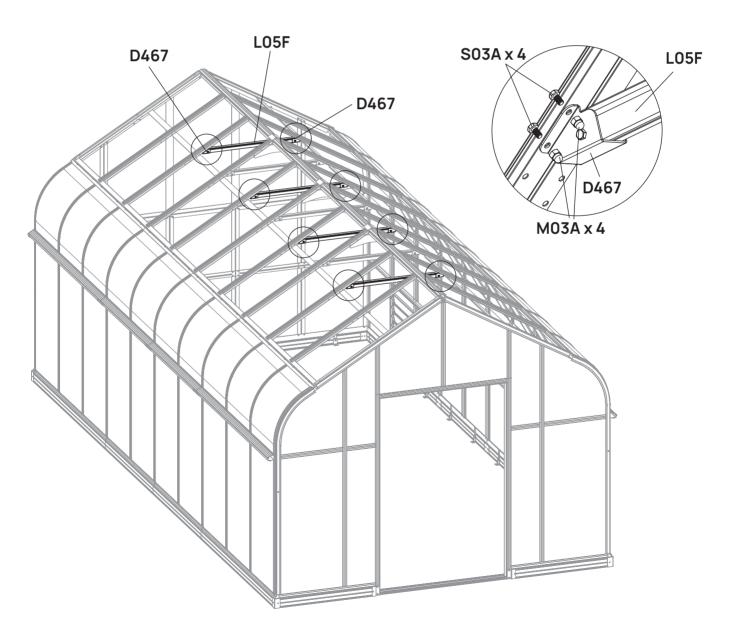


### Vent Assembly





With the UV-Protected side of the PC panel facing downward, assemble the vent as shown, using Z02A screws. Make sure the profiles with weather stripping are positioned on the same side, trim any excess stripping from the ends.

вох	PART	NO	QTY
ALBOX-5	凸	L11A	10
ALBOX-5		L19	20
ALBOX-5	<del></del>	L20	10
ALBOX-5		L21	10
PCBOX-1		Y10	10
ALBOX-5	<b>E</b>	<b>Z02A</b> Ø4X16D	100
PCBOX-2	0	H158	1

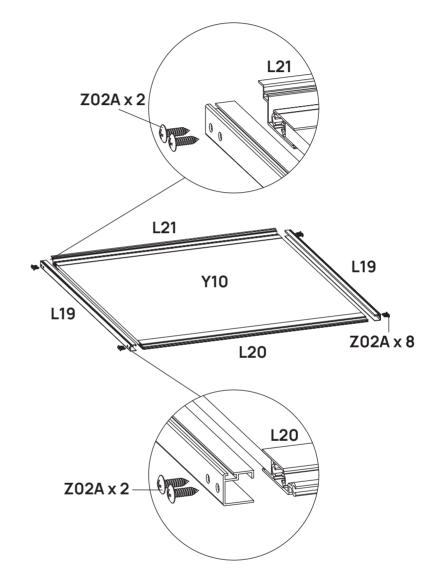


Slide L11A hinge frame onto L20 as shown. Ensure it is oriented the correct way, then secure with Z02A screws as shown.

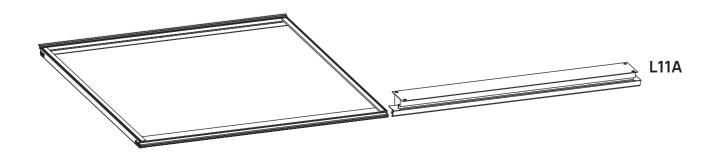

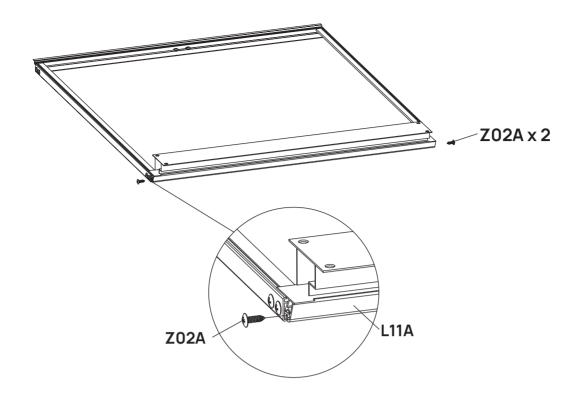


Repeat these steps to assemble a total of 10 vents.

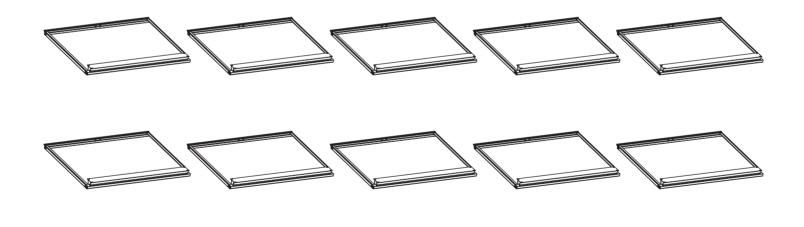



Apply silicone caulk (not provided) or H231 butyl tape around all PC panels to seal.


вох	PART	NO	QTY
PCBOX-2		H231	1

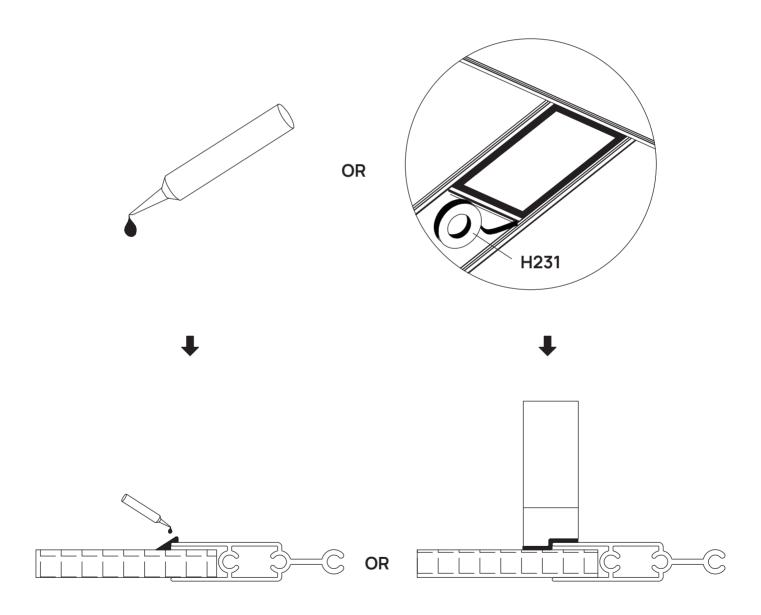



Slide Y7 and Y9 panels into place as shown.


вох	PART	NO	QTY
PCBOX-1		Y7	2
PCBOX-1		Y9	2
PCBOX-2	0	H158	1
PCBOX-2	<b>O</b> -	H231	1

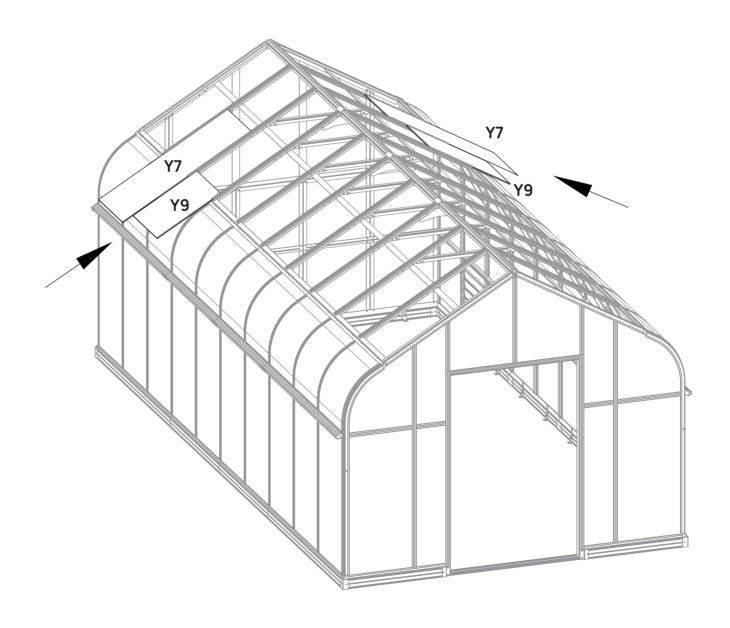




Attach vents to the roof as shown in diagram.


вох	PART	NO	QTY
		C1	2
ALBOX-5		S03A M6X10	8
ALBOX-5	<b>©</b>	M24 M6	8
PCBOX-2	0	H231	1



**Note:** Gently slide the vent along the rafters at a slight angle, aligning the groove on the vent frame with the ridge on the rafter frame. Once aligned, adjust the vent to the correct position and secure it in place.

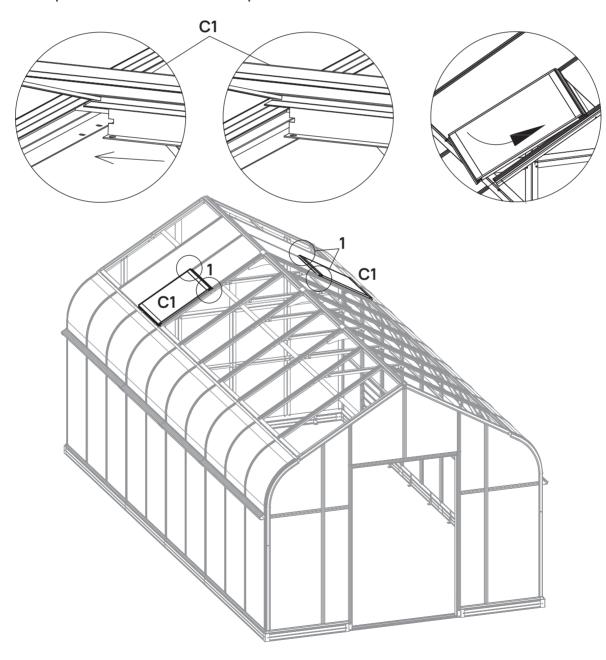

Apply silicone caulk (not provided) or H231 butyl tape around all roof PC panels to seal.

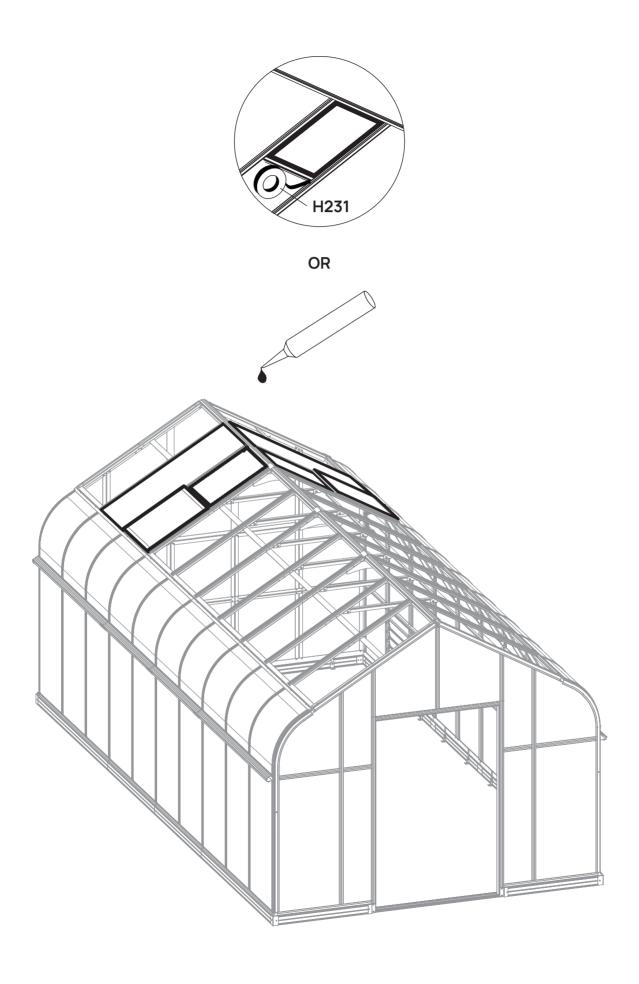





Repeat the last three steps to install the rest of panels and vents a shown.

Apply silicone caulk (not provided) or H231 butyl tape around all roof PC panels to seal.

BOX	PART	NO	QTY
PCBOX-1		Y7	8
PCBOX-1		Y9	8
		C1	6
ALBOX-5		S03A M6X10	24
ALBOX-5		M24 M6	24
PCBOX-2	0	H158	1
PCBOX-2	<b>%</b>	H231	1



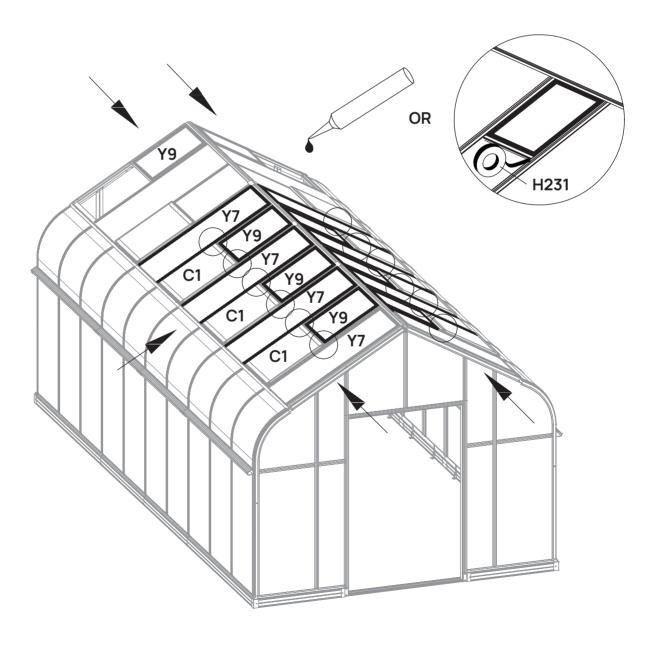





Remove the pre-installed S26A from eave frames.

Attach L29A/B cover frames onto eave frames to secure the roof panels as shown, using the removed S26A bolts.


вох	PART	NO	QTY
ALBOX-4		L29A	4
ALBOX-2		L29B	4
Pre-installed	•	S26A M5X12	40



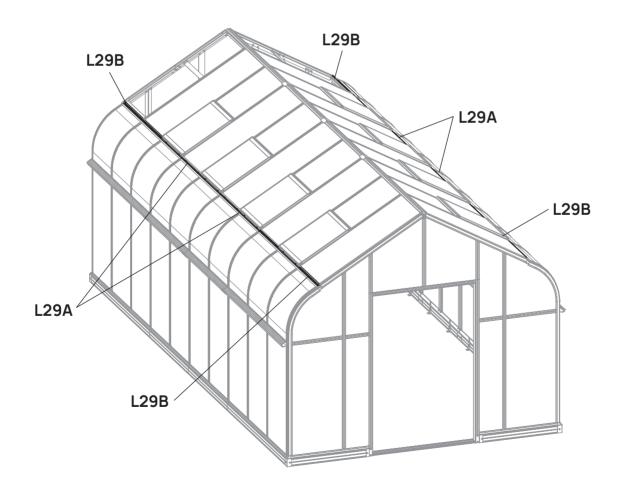




Remove the pre-installed S21A bolts from the front and back gable frames. Attach L12C cover frames onto L01 gable frames to secure the outermost PC panels as shown, using the removed S21A bolts.

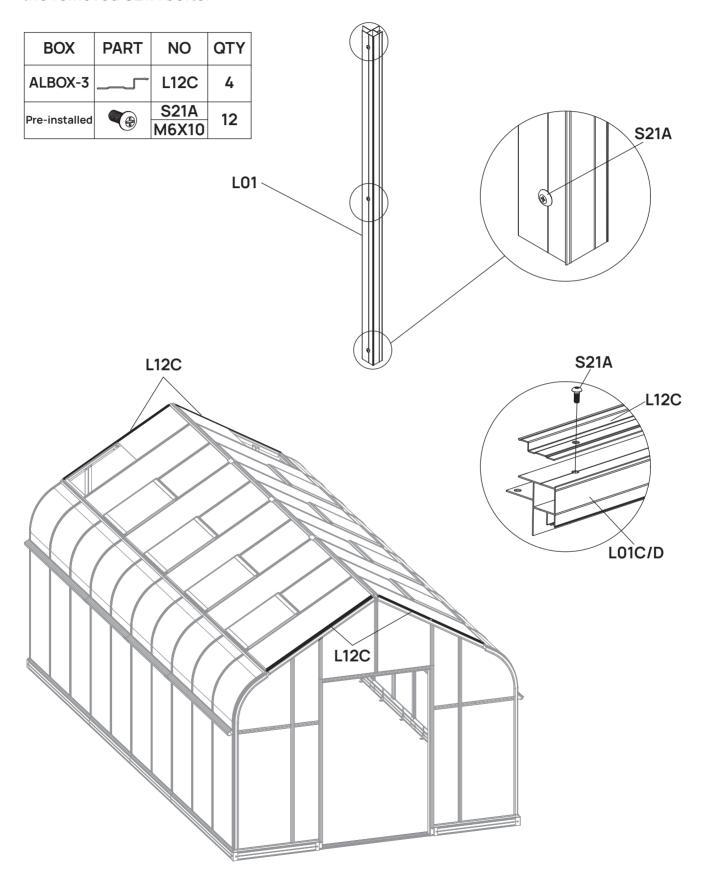





Attach the last vents on the roof, then install the manual vent openers as shown.

вох	PART	NO	QTY
		C1	2
ALBOX-1		A111	10
Pre-installed		S26A	20
Pre-installed		M5X12	20
ALBOX-5		S03A	8
ALBOX-3		M6X10	0
ALBOX-5		M24	8
ALBOX-3	40	М6	0
ALBOX-5	Contille	Z19A	20
ALDUX-3	Charac	M4.2X10	20

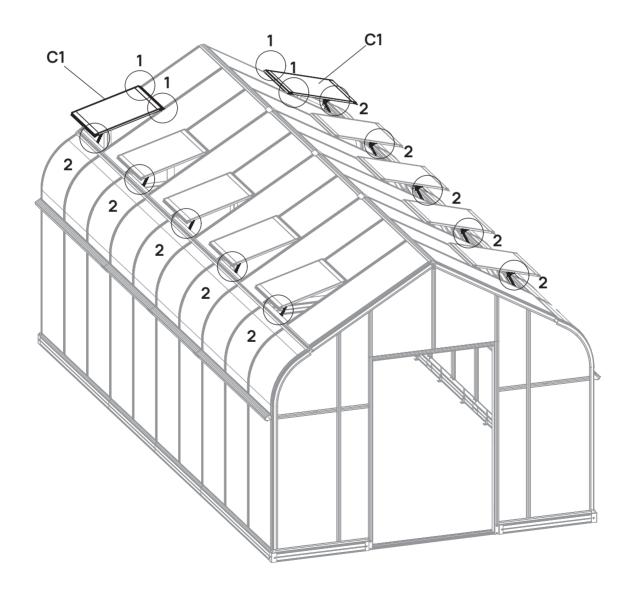

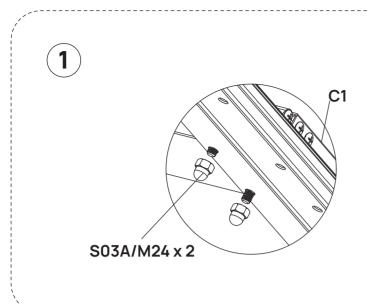

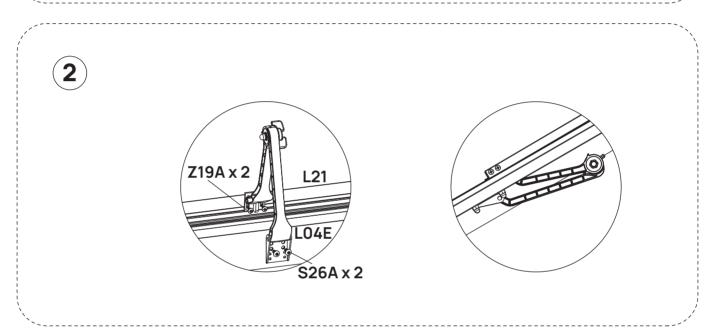




#### Auto Vent Opener Assembly



Assemble 2 sets of H244 Auto Vent openers as shown.


ВОХ	PART	NO	QTY
ALBOX-1		H244	2
Pre-installed		S26A M5X12	4
ALBOX-2	+	Z19A M4.2X10	4

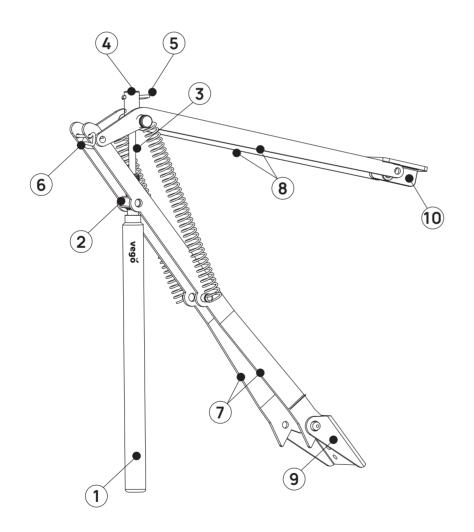

- 1 Cylinder
- 2 Cylinder Housing
- 3 Piston Rod
- 4 Clutch T
- 5 Hair Pin
- 6 Stop Pin
- 7 Arm B
- 8 Arm A
- (9) Frame Bracket
- 10 Vent Bracket

Thread the Cylinder through the Cylinder Housing so that the end of the Piston Rod enters the Clutch T.

**Tips:** For easy assembly, chill the cylinder at a temperature below 41°F for 15–20 minutes to reduce tension.

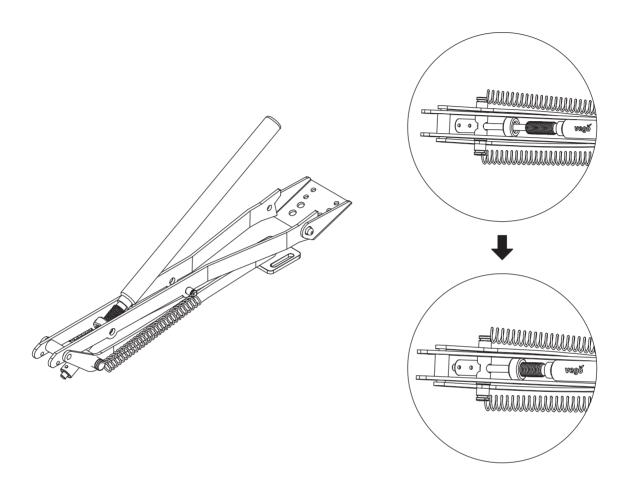




vegogarden.com

# **02**

If the maximum vent opening measures more than 16.5 inches, place the Hair Pin into hole A.


If the maximum opening measures less than 16.5 inches, place the Hair Pin into hole B. Insert the longer Stop Pin into the end of into the end of Arm B frame as shown in blue. **Note:** Do not install Stop Pin until Hair Pin has been installed.

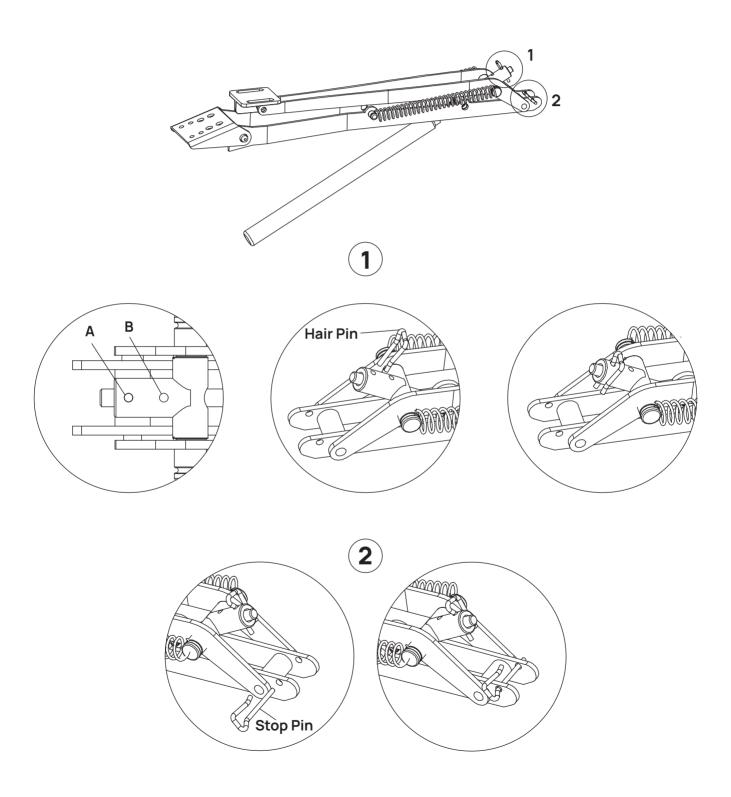


# STEP 03

Replace any 2 sets of the manual vent openers with the assembled auto vent openers as shown.








In case of sudden rain, strong winds, or other extreme weather while the auto vent opener is in the open position:


Push the frame arm inward as shown to release it from the bracket and quickly close the vent.

To secure it, tie the opener to a fixed point with a rope during storms to prevent the vent from being blown open.

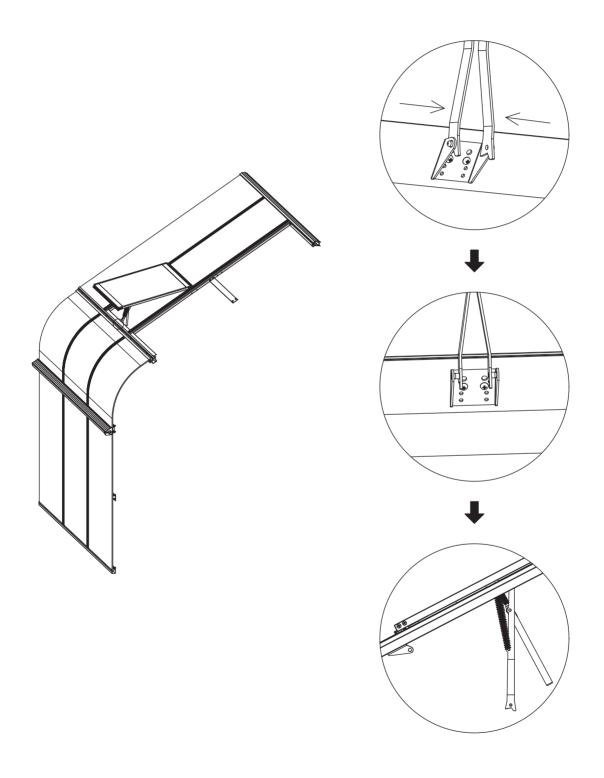




#### **Dutch Door Diagram**

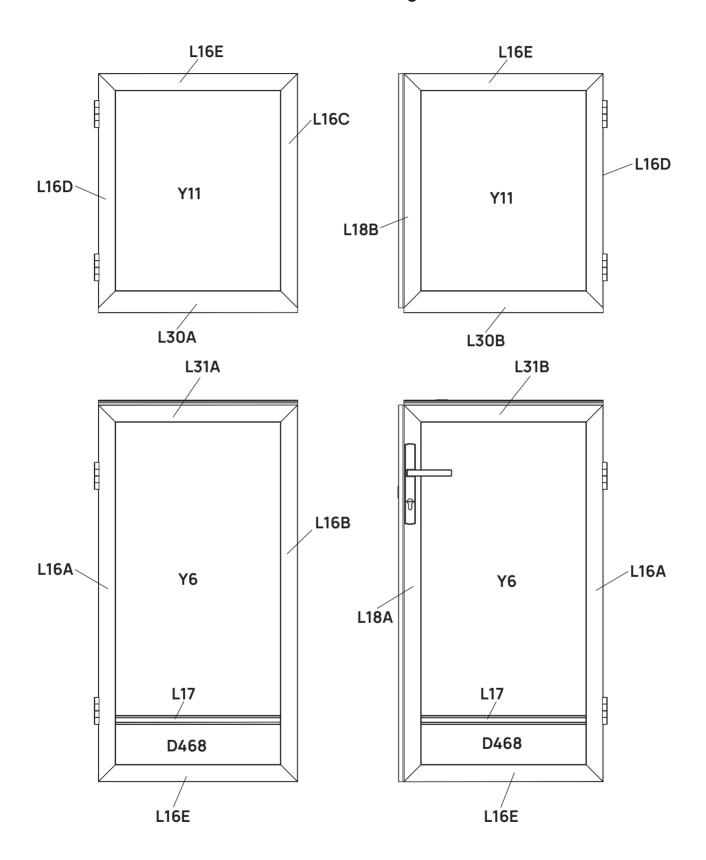



## O1

Assemble 4 sets of L16E pieces as shown, attach J193 pieces to each ends and secure with Z02A screws.

вох	PART	NO	QTY
ALBOX-5	Œ	L16E	4
ALBOX-5		J193	8
ALBOX-5		Z02A	16
ALDOX-3	The second second	Ø4X16D	10



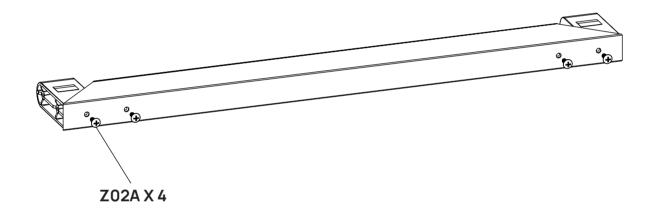


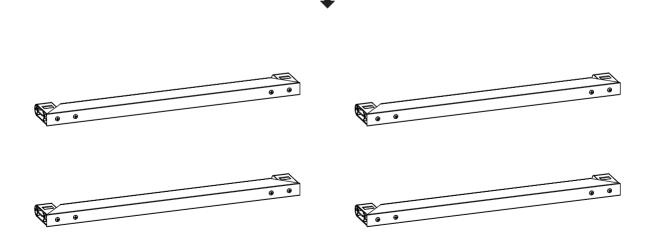




Assemble L30A, L30B, L31A and L31B in the same way as shown.

BOX	PART	NO	QTY
ALBOX-5		L30A	1
ALBOX-5		L30B	1
ALBOX-5	T	L31A	1
ALBOX-5	T	L31B	1
ALBOX-5		J193	8
ALBOX-5	<b>4</b>	<b>Z02A</b> Ø4X16D	16




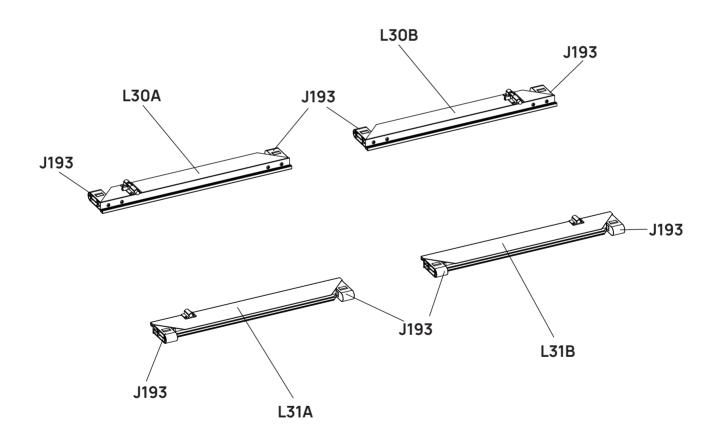




Assemble the upper-left door using Z02A screws, then attach the hinges as shown.

вох	PART	NO	QTY
ALBOX-4	工	L16A	1
ALBOX-4	二	L16B	1
ALBOX-5		L16C	1
ALBOX-5	日	L16D	1
ALBOX-5	H	L17	1
ALBOX-5		<b>Z02A</b> Ø4X16D	16
ALBOX-5		S03A M6X10	2
ALBOX-5	<b>©</b>	M24 M6	2
PCBOX-3		Y11	1
PCBOX-3		Y6	1
PCBOX-2		H158	1
ALBOX-5	0000	A51	4
Pre-installed		S27A M4.8X16	12
ALBOX-5		D468	1

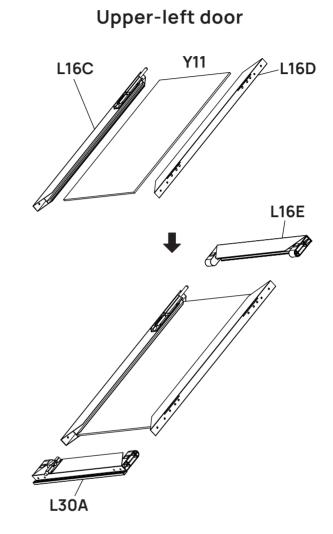

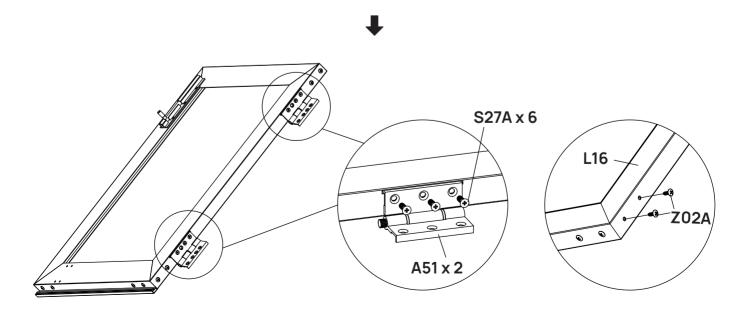


# 04

Assemble the lower-left door as shown, secure the L17A frame and D468 aluminum plate at the bottom.

Finally attach the hinges as shown.


#### Lower-left door

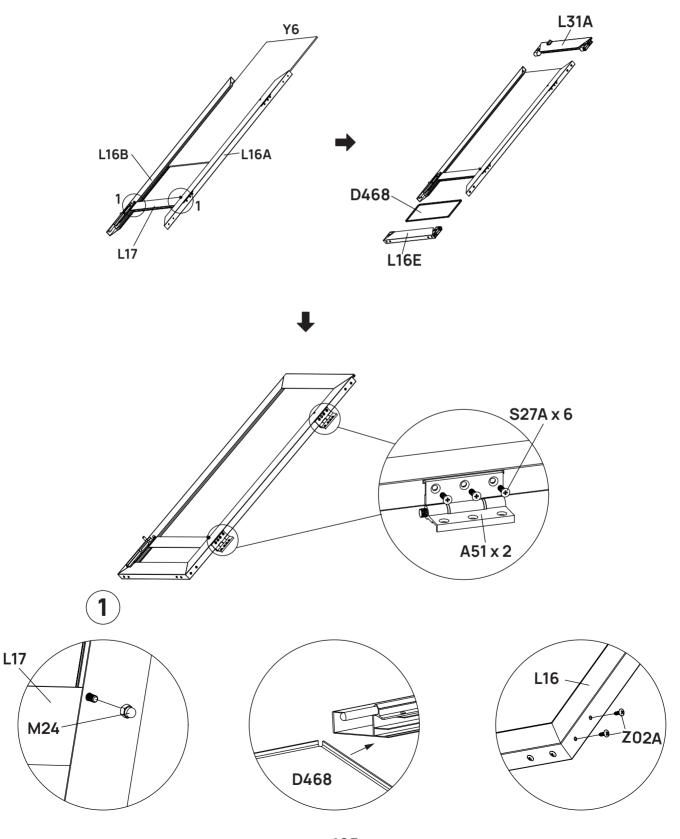




Assemble the upper-right door using Z02A screws, then attach hinges as shown.

BOX	PART	NO	QTY
ALBOX-4	工	L16A	1
ALBOX-5	工	L16D	1
ALBOX-4	Œ	L18A	1
ALBOX-5	H	L18B	1
ALBOX-5	Н	L17	1
ALBOX-5	<b>(4)</b>	<b>Z02A</b> Ø4X16D	16
ALBOX-5		S03A M6X10	2
ALBOX-5	<b>©</b>	M24 M6	2
PCBOX-3		Y11	1
PCBOX-3		Y6	1
PCBOX-2		H158	1
ALBOX-5	0000	A51	4
Pre-installed		S27A M4.8X16	12
ALBOX-5		D468	1

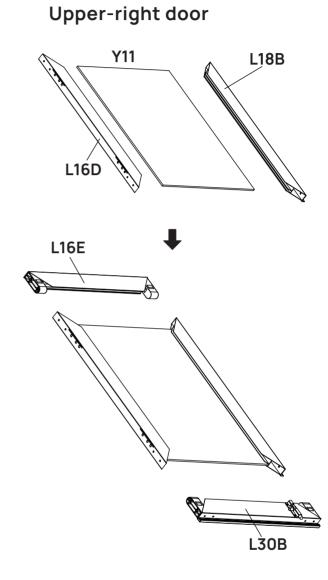

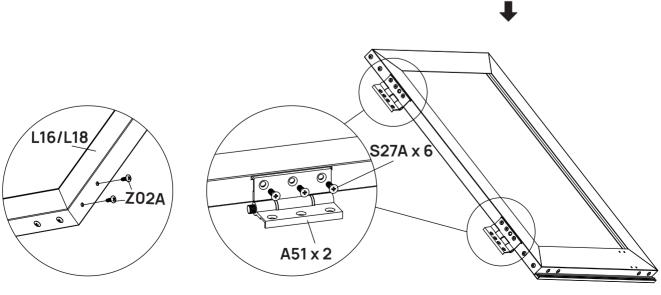


# 06

Assemble the lower-right door as shown, secure the L17A frame and D468 aluminum plate at the bottom.

Finally attach the hinges as shown.


#### Lower-right door (with lock holes)

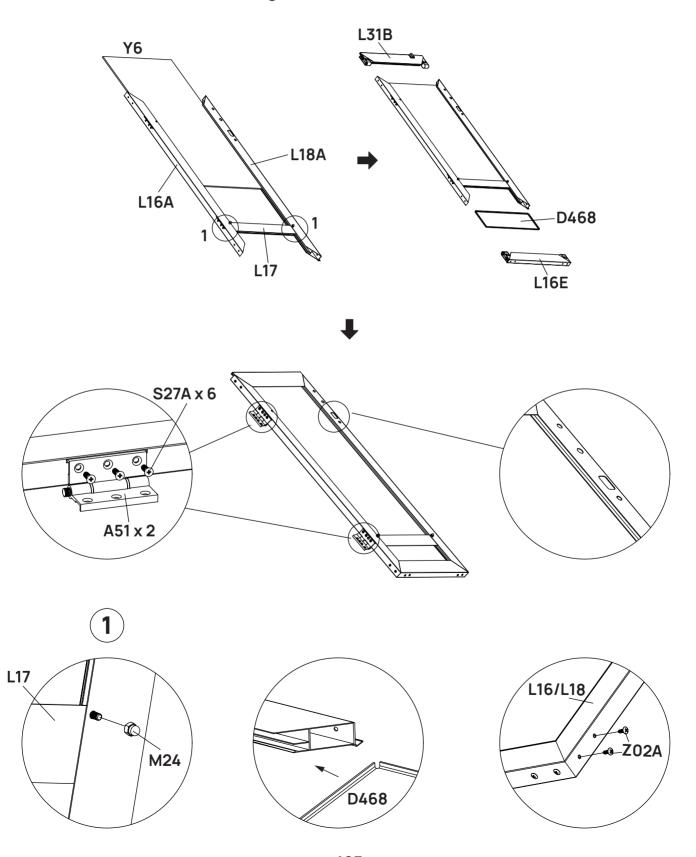






Remove S27A bolts from the L03 door frames. Hold the door in place, affix the hinges to the door frames, and secure them with S27A bolts. Finally, reinforce the structure with Z17A screws.

вох	PART	NO	QTY
		DOOR-L	1
		DOOR-R	1
ALBOX-5		Z17A M4.8X16	16
Pre-installed		S27A M4.8X16	24

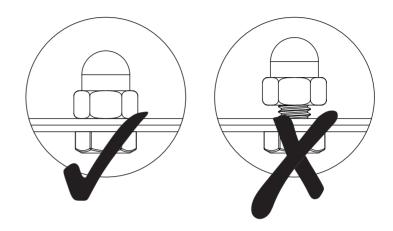

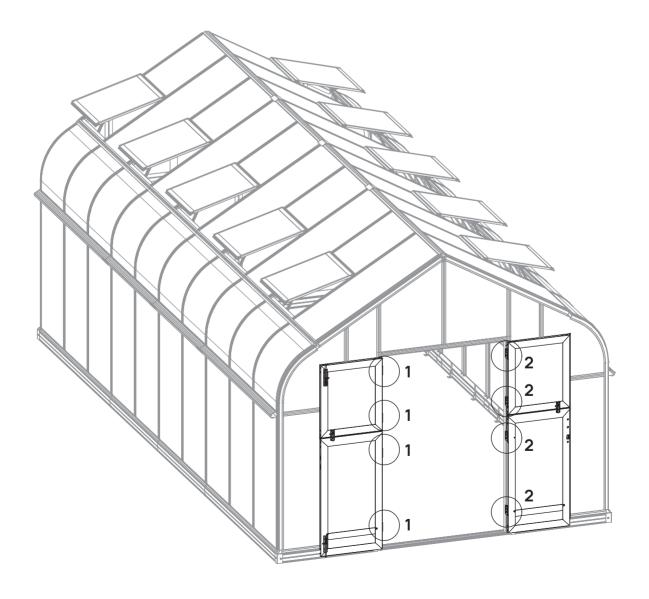

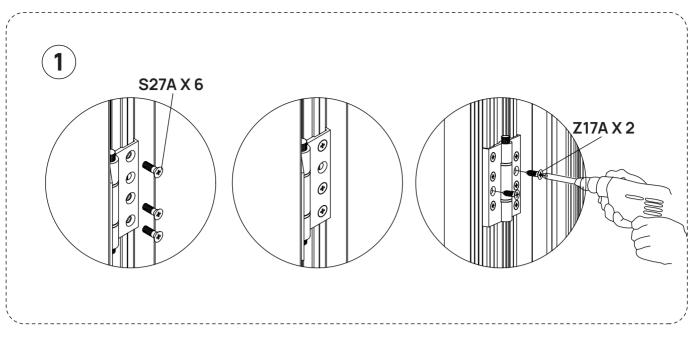


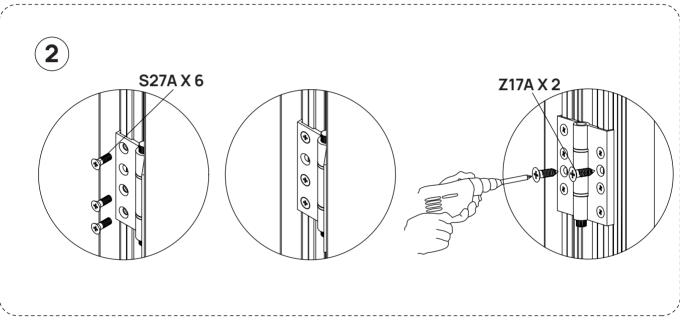




Lock installation.

вох	PART	NO	QTY
ALBOX-2	##	H199	1

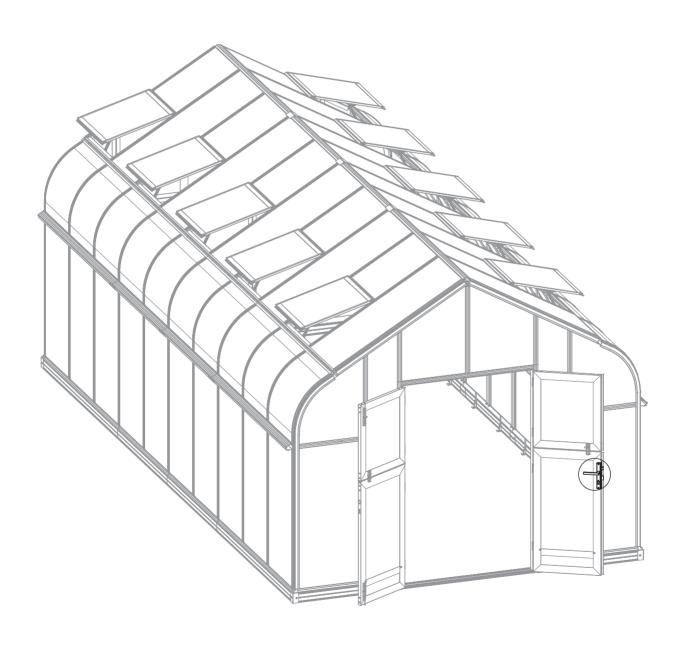


Disassemble the door lock and install it onto the right door. Make sure the keyhole faces outward and the handle rests horizontally as shown.

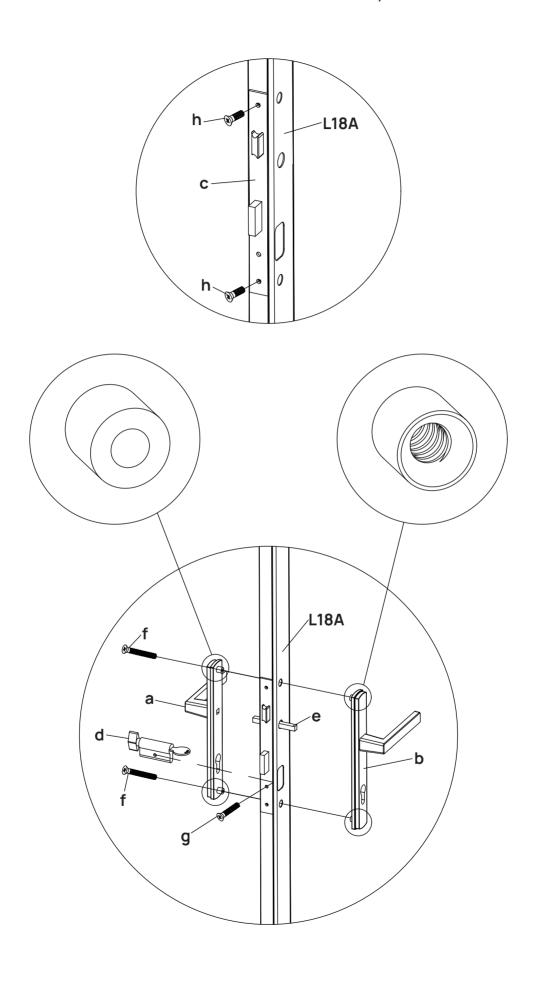




Insert J280 caps to both ends of the door frames as shown.

вох	PART	NO	QTY
ALBOX-5		J280	8

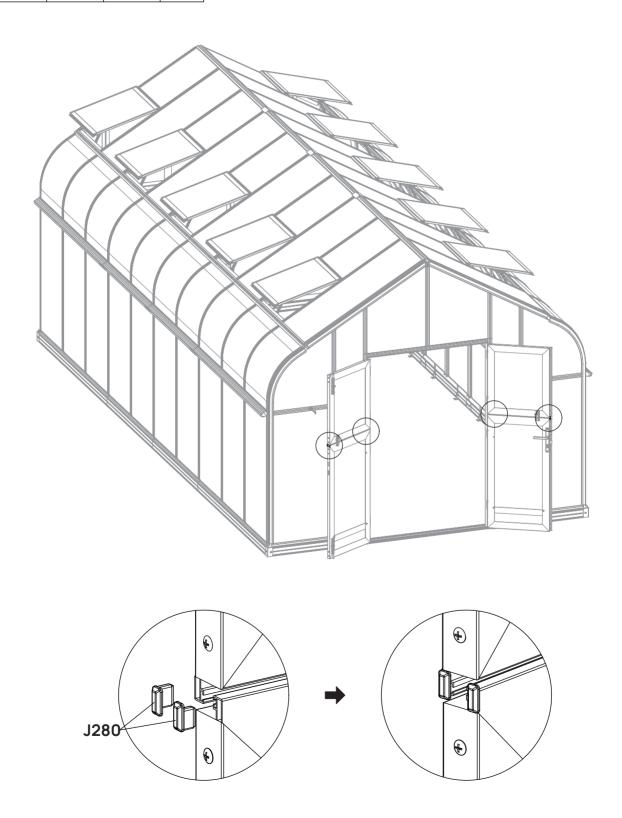

The upper doors can be opened separately by unlock the barrel bolt latches.

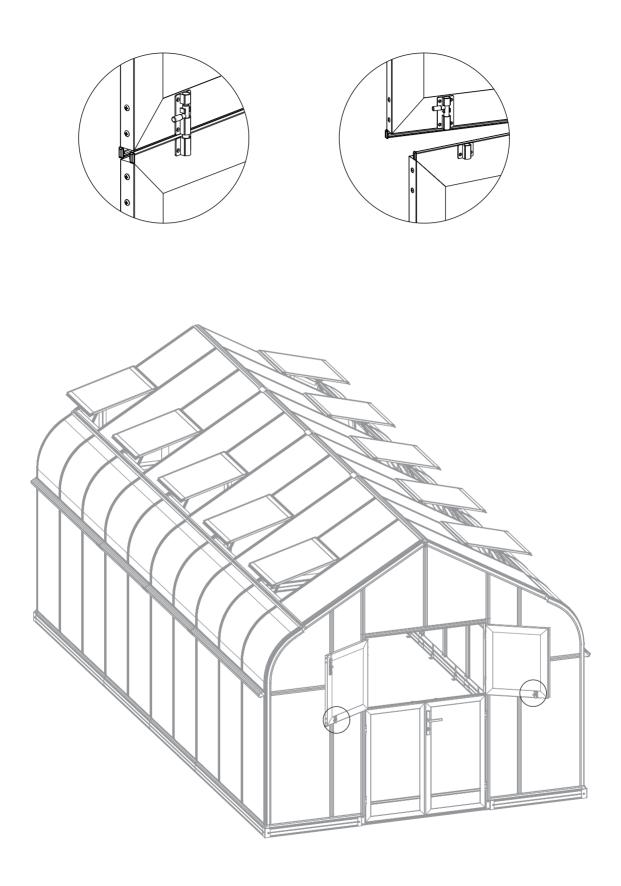






### **End Caps Assembly**

Attach ridge end caps, eave end caps and gutter end caps as shown.

вох	PART	NO	QTY
ALBOX-5		J198	2
ALBOX-5	6	J266L	2
ALBOX-5	<b>@</b>	J266R	2
ALBOX-5	<b>6</b>	J267L	2
ALBOX-5	(V)	J267R	2
ALBOX-5	<b>*</b>	Z08A M4.2X16	12
ALBOX-5		S03A M6X10	4
ALBOX-5	<b>©</b>	M24 M6	4




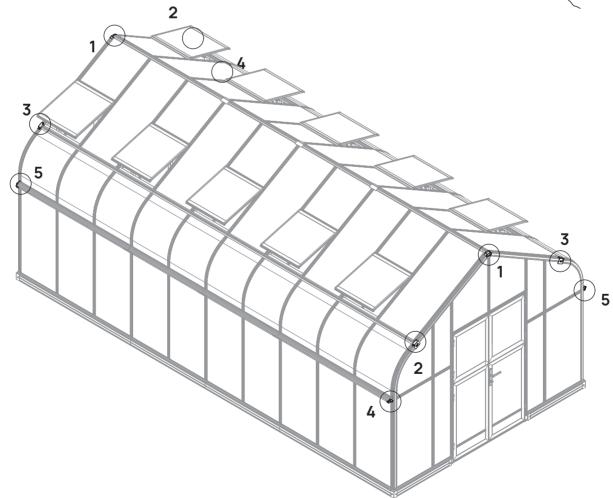

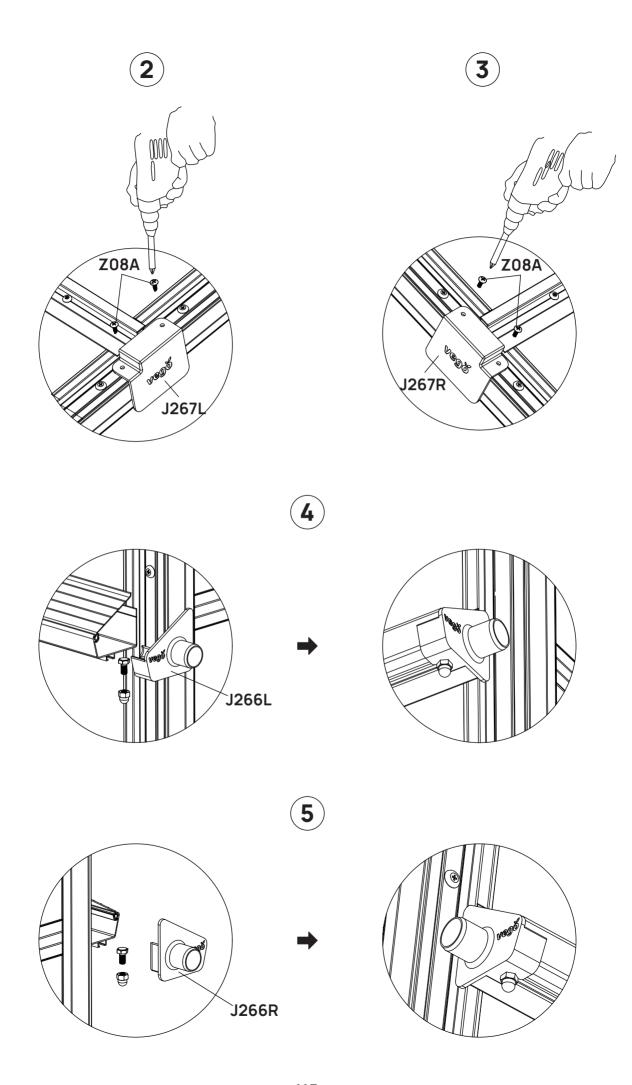





Assemble the drainage pipes as shown, then attach them to the gutter end caps. Apply silicone caulk or waterproof tape to reinforce the connection between gutter end cap and pipe.

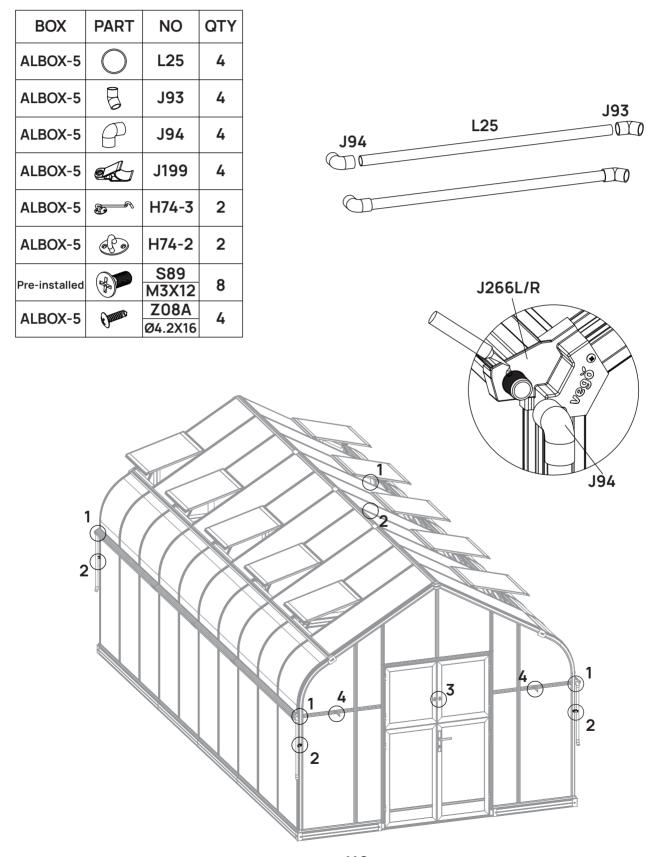

Apply silicone caulk (not provided) between the gaps of plastic caps and frames to ensure a watertight seal as shown.




Attach pipe bracket and wind latch as shown in diagram.

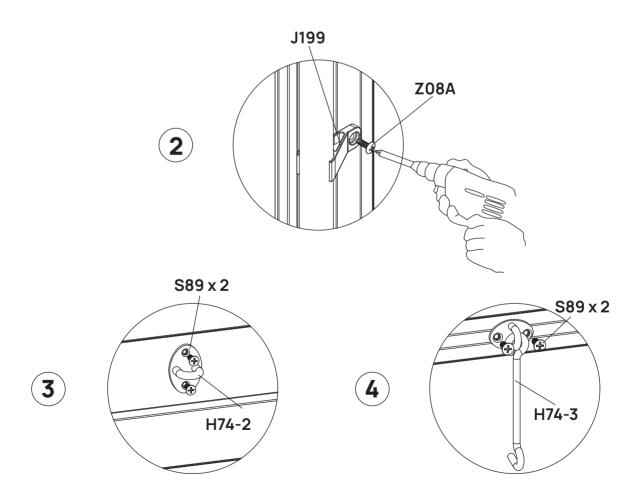




Apply silicone caulk (not provide) around all PC panels to ensure watertight sealing. **Note:** For the roof, ensure to seal the joints between each profiles as well, using silicone caulk or the provided H231 butyl tape.

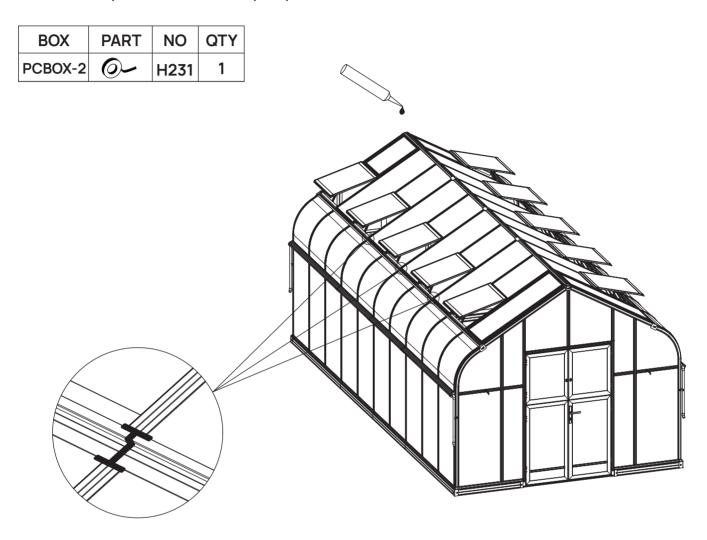

Perform a final inspection of your greenhouse and ensure that all nuts are securely tightened.

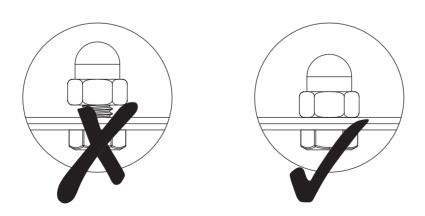



#### **Contact Us**



+1 (866) 597-1888



Vego Garden Academy



hello@vegogarden.com



vegogarden.com



vego\_garden



Houston, TX