



Gardening
Made Easier.
Anytime,
Anywhere.

Grow Light Garden User Manual

Models: VIGPR-F2, VIGPR-F4 and VIGPR-F4S

Gardening Made Easier. Anytime, Anywhere.

Copyright © 2025 Vego



Contact Us



+1 (866) 597-1888



Vego Garden Academy



hello@vegogarden.com



vegogarden.com



vego_garden



Houston, TX

Contents

Grow Light Garden Series

02

Getting Started

03

Parts List

06

Safety
Precautions

07

VIGPR-F2
Instructions

11

VIGPR-F4
Instructions

17

VIGPR-F4S
Instructions

28

Adding
Grow Lights

30

Cleaning and
Maintenance

30

Operation
Safety Precautions

31

Q&A

32

Warranty and
Support



Getting Started

Thank you for choosing the **Vego Grow Light Garden**. These products are designed to support optimal plant growth in various environments, combining an adjustable shelving unit with versatile magnetic grow lights.

This manual applies to three models:

- **VIGPR-F2:** Two-tier unit with 2 grow lights.
- **VIGPR-F4:** Four-tier unit with 4 grow lights.
- **VIGPR-F4S:** Three-tier unit with 3 grow lights & a storage cabinet at the bottom instead of a fourth plant tier.

Key Features

- **Adjustable Trays** – Change tray heights, or remove to fit large plants.
- **Wheels** – 2 casters & 2 locking casters.
- **Wall Brackets** – Optional to secure to a wall if not using the wheels.
- **Magnetic Mount Grow Light** – Easy to install and adjust.
- **Storage Cabinet (F4S only)** – Tuck away tools & supplies.
- **Easy Assembly** – Streamlined design makes set up a breeze.



Use this manual to assemble and install your model.









Usage Precautions

- **Ensure the frame is stable before use.**
- **Regularly check the trays for water retention and clean as needed.**
- **When adjusting trays, ensure they are securely placed to avoid any accidents.**

Parts List

Part Name	Models	VIGPR-F2	VIGPR-F4	VIGPR-F4S
H1 		2	6	4
H2 		2	6	4
H3 		2	1	2
H4 		2	1	2
H5 			1	
H6 			1	
H7 				2
H8 				2
C1 		1	1	1
C2 		4	12	10
C3 		2	2	2
C4 		2	2	2

Part Name	Models	VIGPR-F2	VIGPR-F4	VIGPR-F4S
C5 			1	
C6 				2
C7 				2
V1 		1	1	
V2 		1	1	1
V3 			2	1
V4 		2	2	2
V5 		2	2	2
V6 		1	1	1
T1 		1	1	1
T2 		1	1	
F1 		4	4	4

Part Name \ Models	Models		
	VIGPR-F2	VIGPR-F4	VIGPR-F4S
F2 	2	2	2
F3 	2	2	2
F4 	2	2	2
F5 		4	
F6 	4	4	
A1 			2
A2 			1
A3 			2
A4 			1
A5 			1
A6 			1
A7 			1

Part Name \ Models	Models		
	VIGPR-F2	VIGPR-F4	VIGPR-F4S
S7 (Optional) 	6	12	9
Grow Light 	2 Pack	4 Pack	3 Pack

Safety Precautions

This product may contain sharp metal corners and edges. To prevent injury:

- Handle with care at all times
- Wear gloves, closed-toe shoes & long pants when handling
- Work on a stable, clean surface away from children and pets
- Follow all instructions carefully and use tools only as directed

If you are unsure about any step, pause and seek assistance.




Assembly Instructions


To keep the unit safe, use the wall brackets to secure it to a stable surface. This is especially important if you have pets or children. Follow the instructions to attach the brackets to the unit and the wall.

For VIGPR-F2


- 1** The narrow ends of the legs are labeled. Insert the legs into their corresponding numbered places as shown in the diagram.

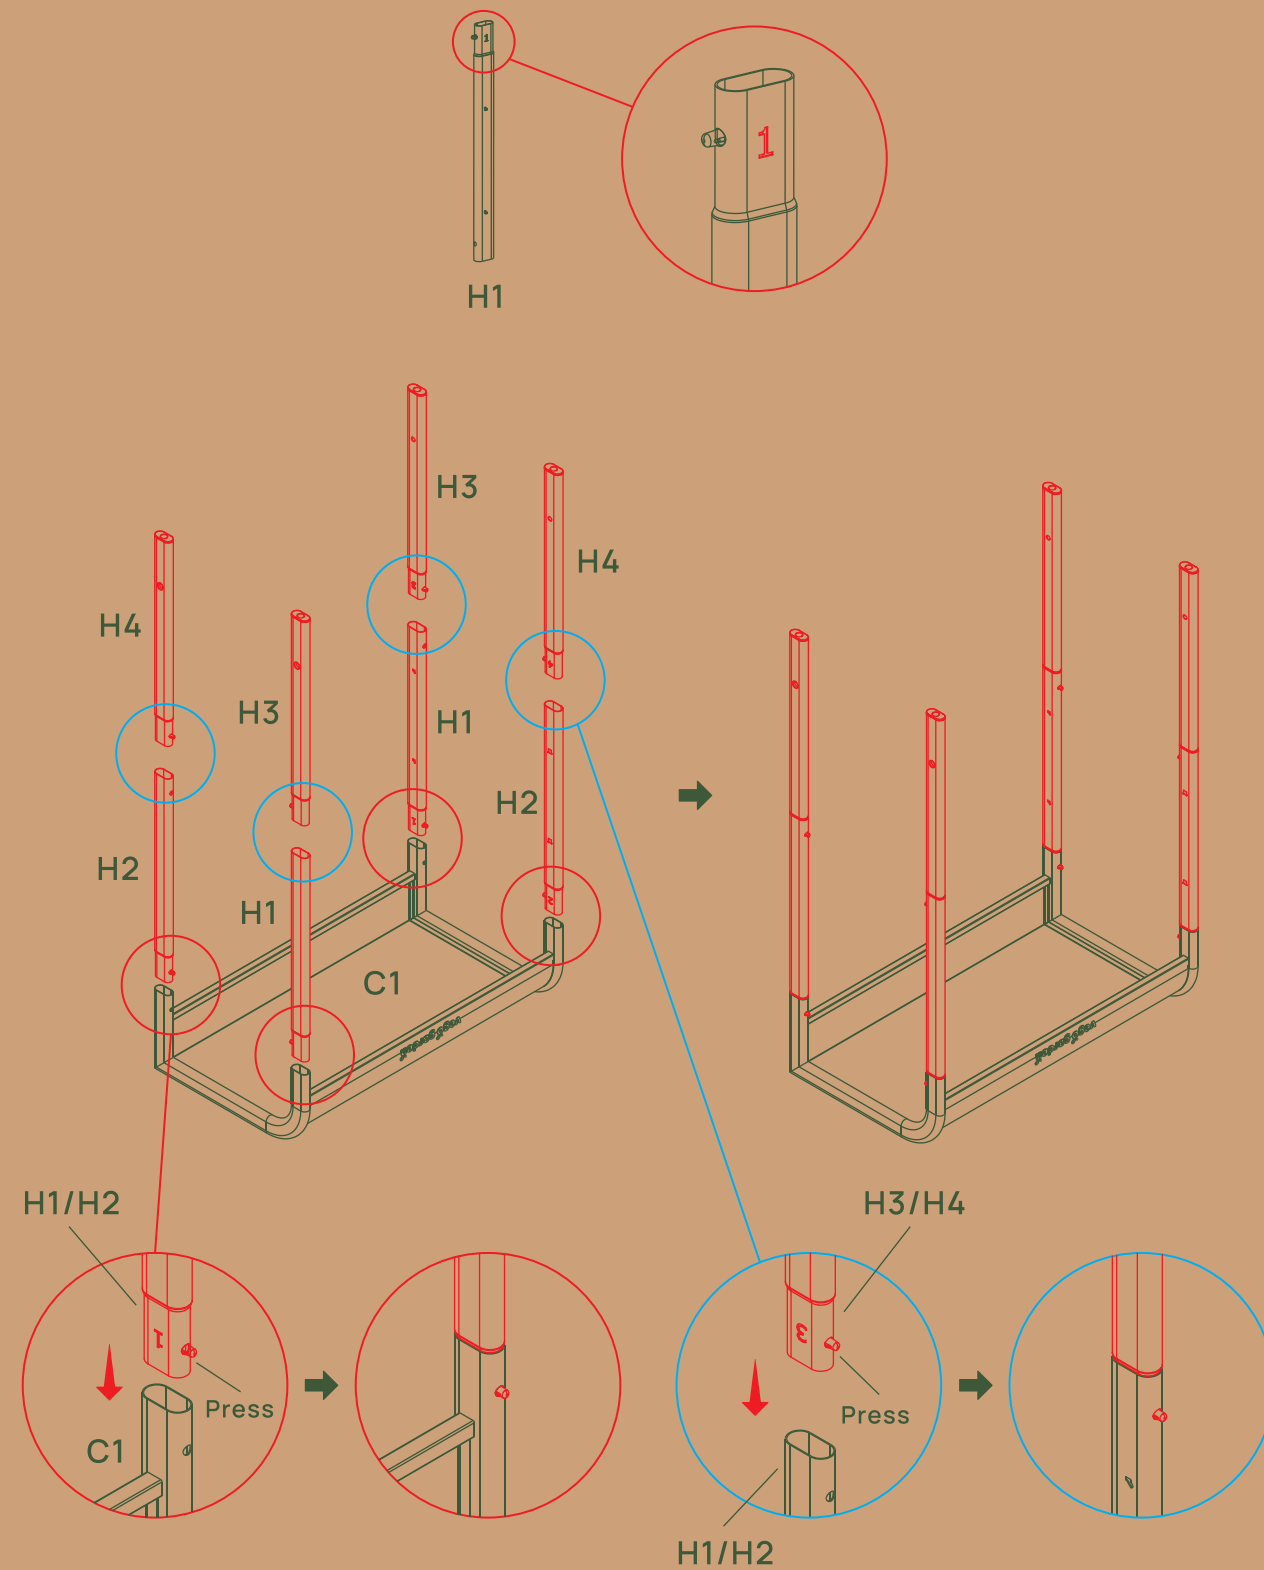

- 2** Install C3 and C4 as shown in the diagram.



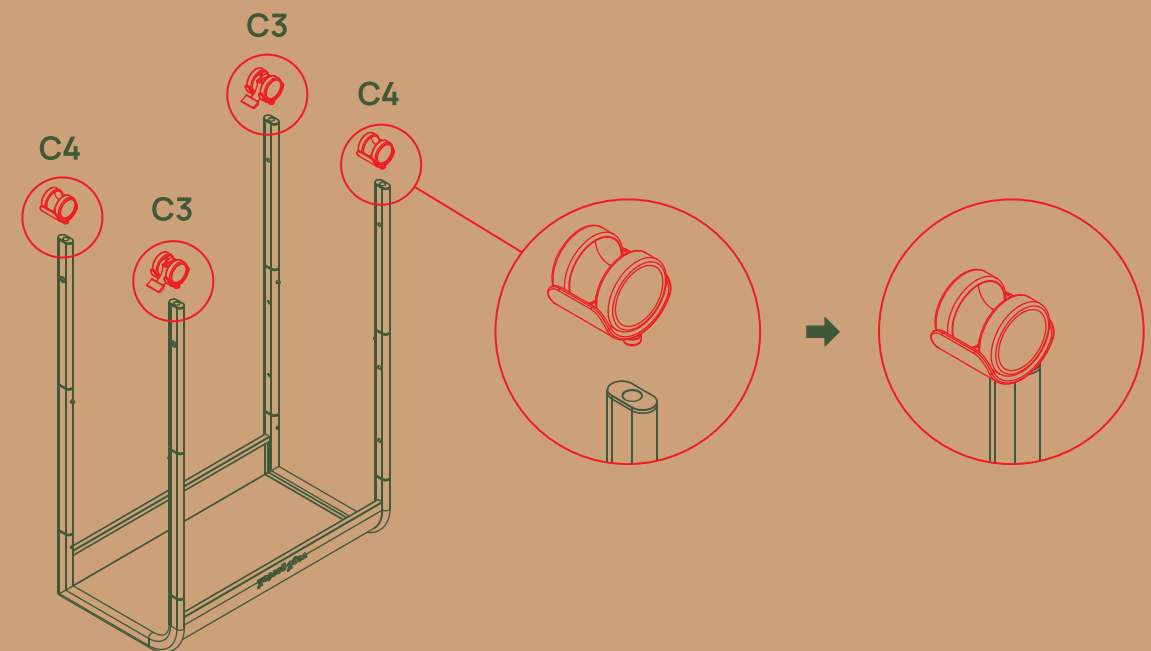


- 3** Install V1 as shown in the diagram, using F1 and F6. Use T1 and T2 to tighten.



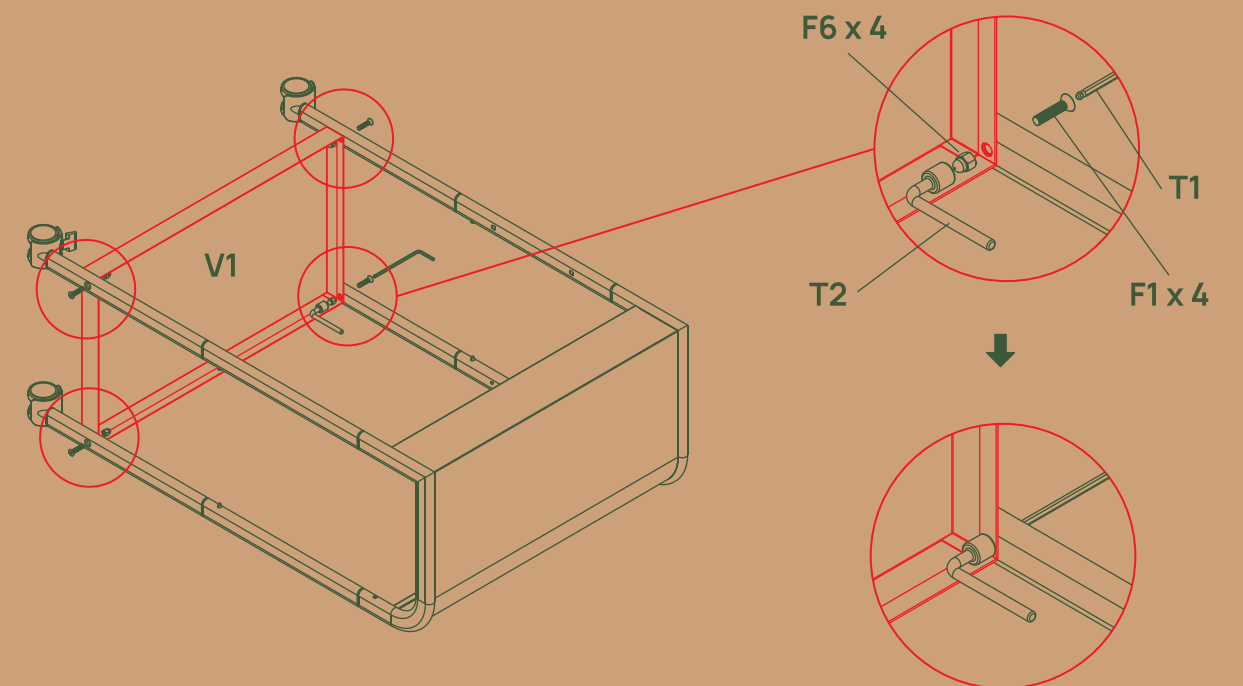


4 Install C2 as shown in the diagram.




Insert one tab of C2 into a slot on H#, then rotate and tilt C2 to align and insert the other side into the corresponding slot.

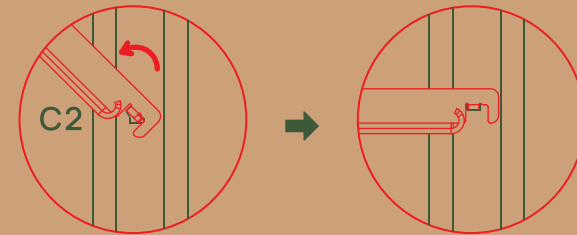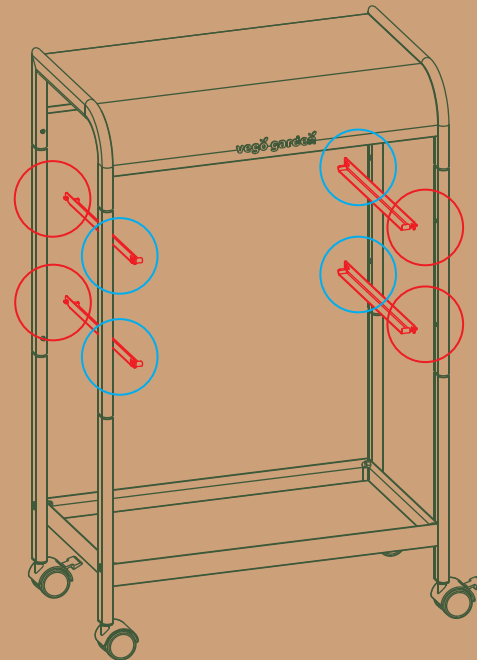





Ensure the selected slots are parallel to each other.



If the frame is uneven after assembly, loosen the bolts in V1 (do not remove them completely) and press down on the top (C1) or the sides (H#) to level the frame, and then re-tighten the bolts.

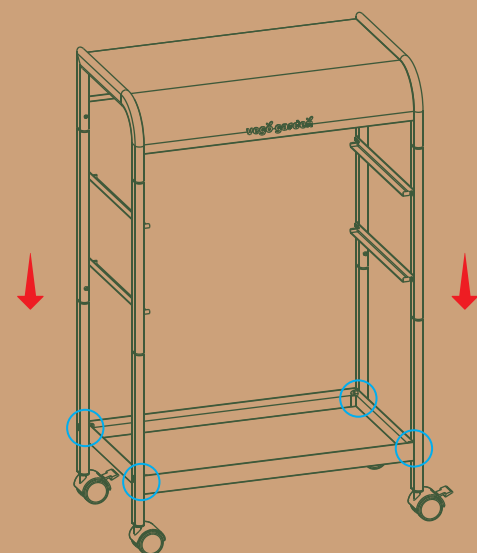


5 Place V2 in the position shown in the diagram.

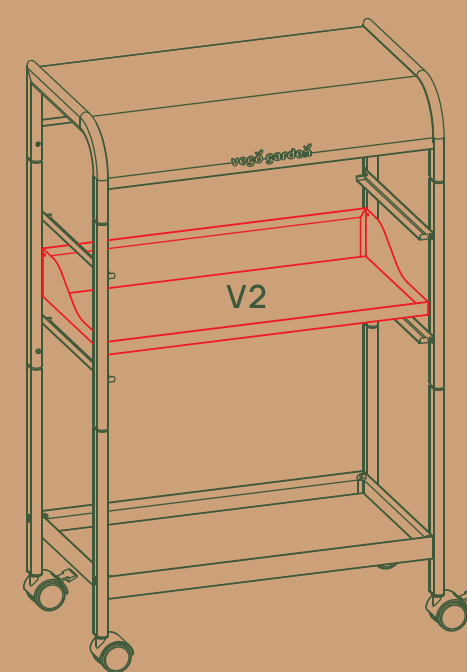


Place V4 hooks onto the side of your Grow Light Garden to keep your tools handy and your space organized.

6 Secure the Grow Light Garden to the wall with V5 and F2. Choose the appropriate anchors based on the wall material: use F3 for concrete walls and F4 for drywall.




F2

V5




V5

V5

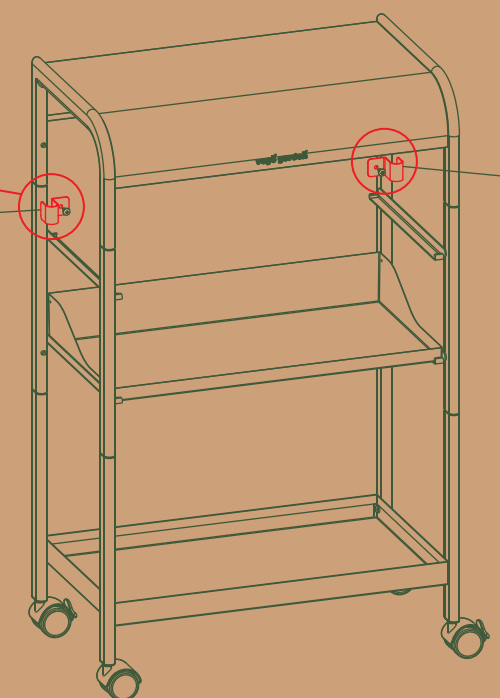


For VIGPR-F4


- 1 The narrow ends of the legs are labeled. Insert the legs into their corresponding numbered places as shown in the diagram.

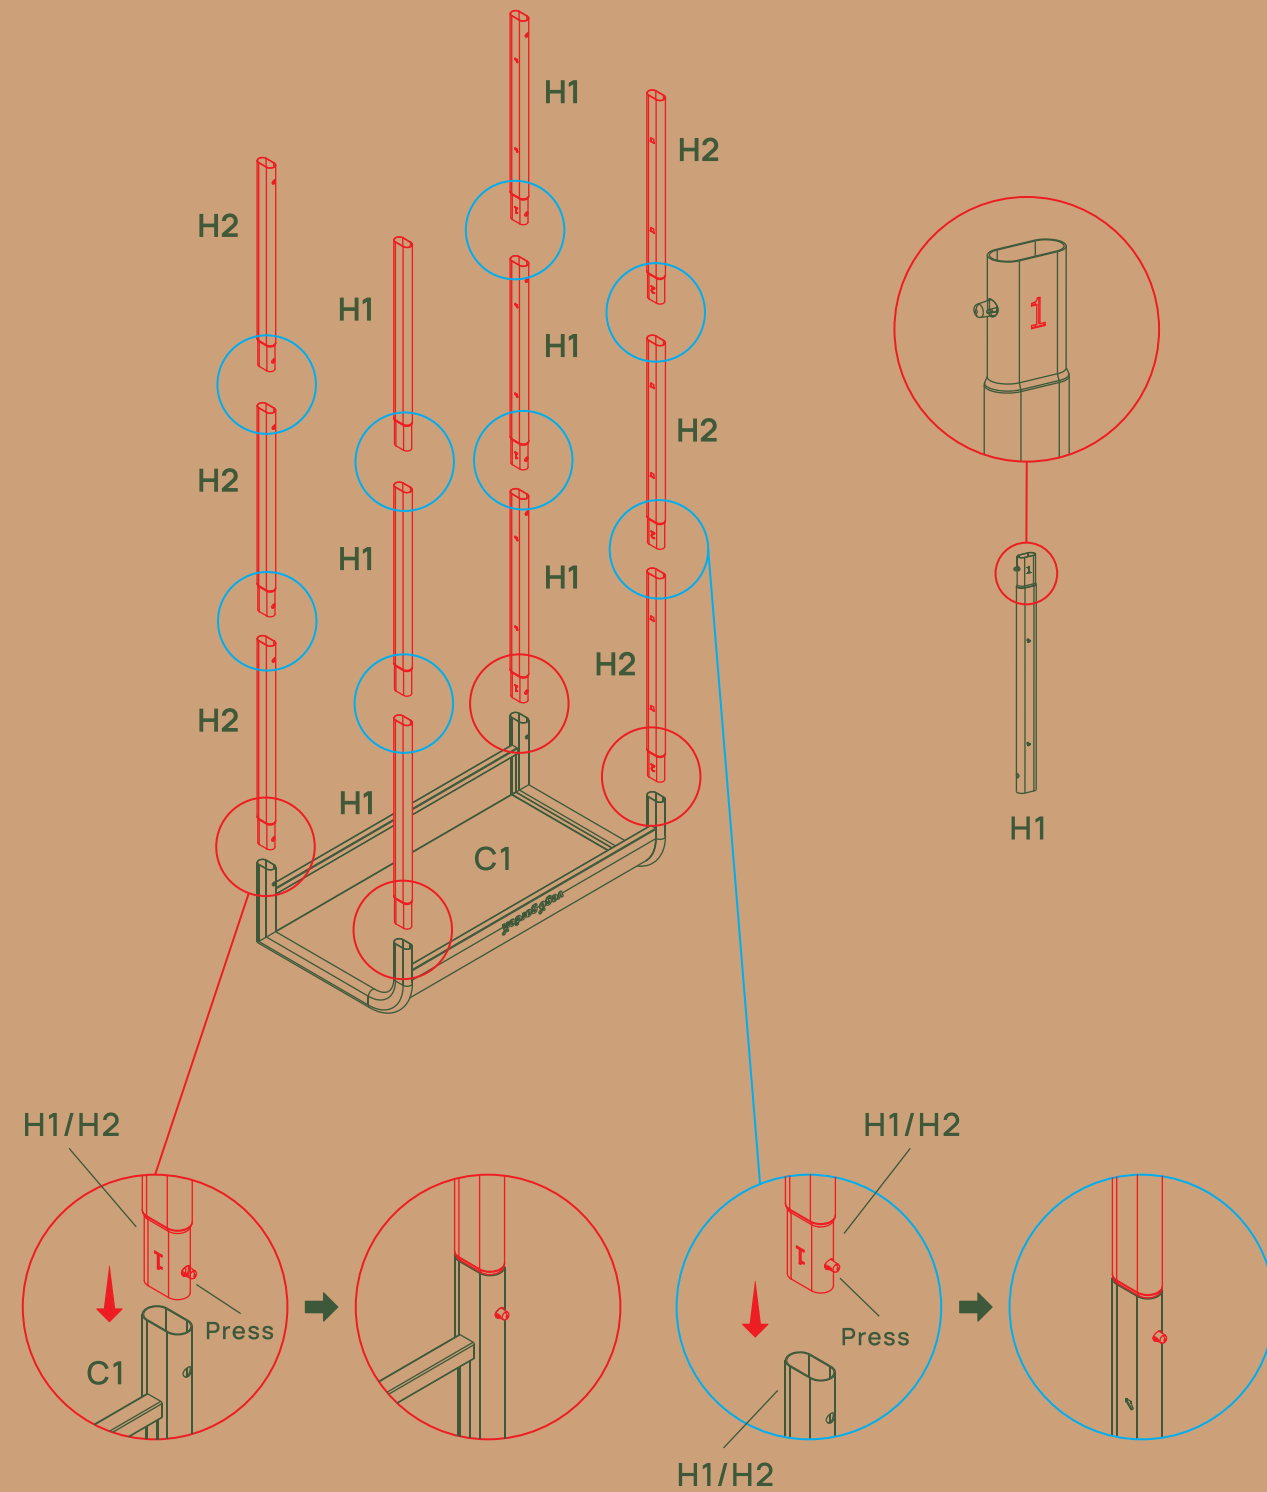


- 2 Install H3, H4, H5 and H6 as shown in the diagram. H3 and H4 should be installed on the side with the logo.

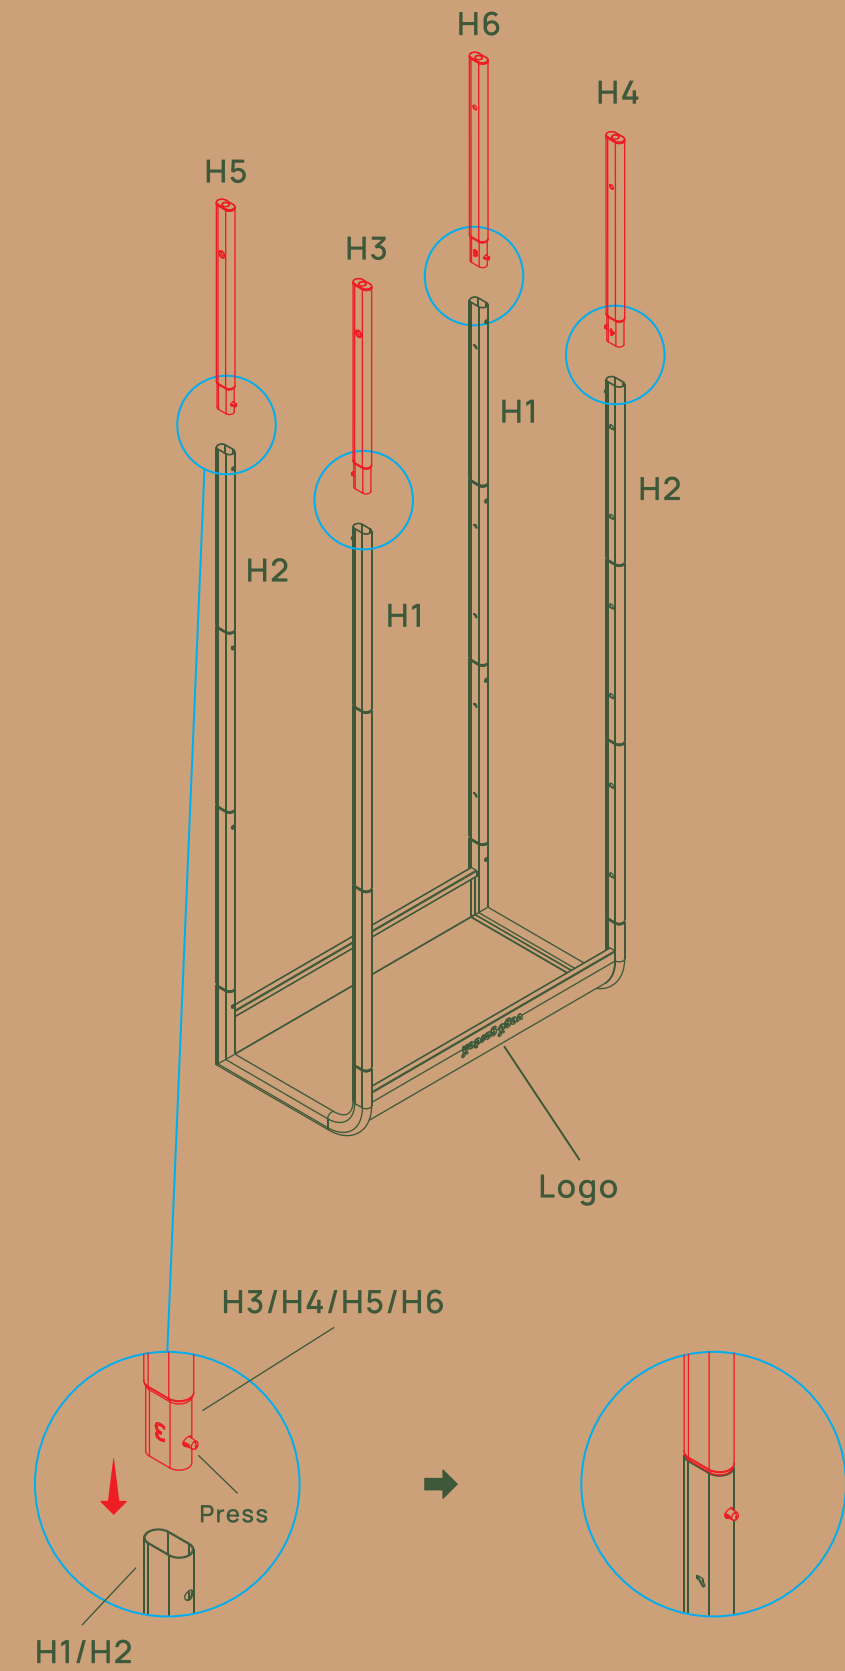



- 3** Install C3 and C4 as shown in the diagram.

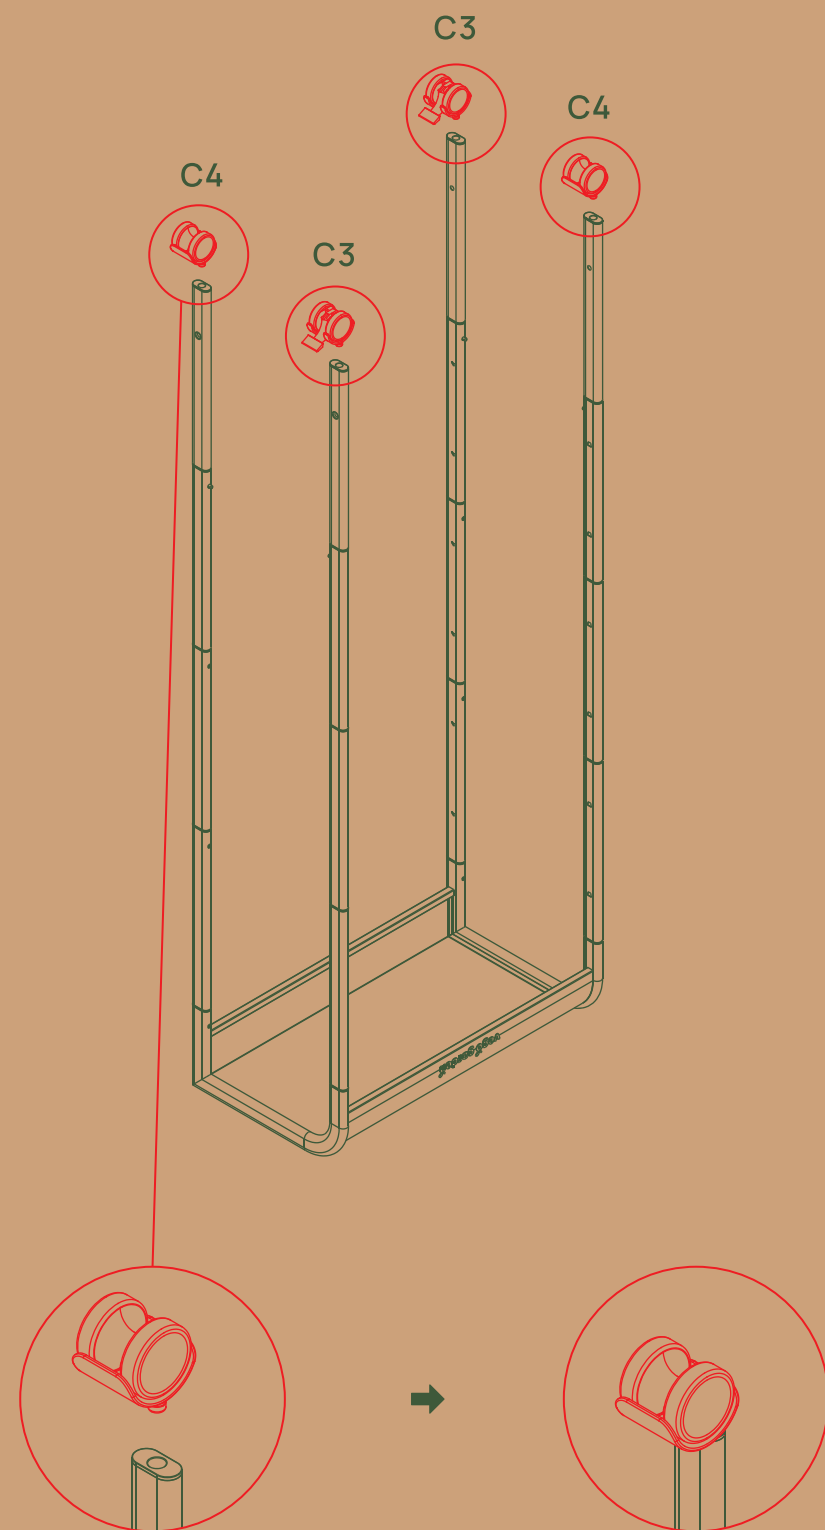


- 4** Install V1 as shown in the diagram, using F1 and F6. Use T1 and T2 to tighten.
Then, attach two C5s to the side without the logo and secure with F5.

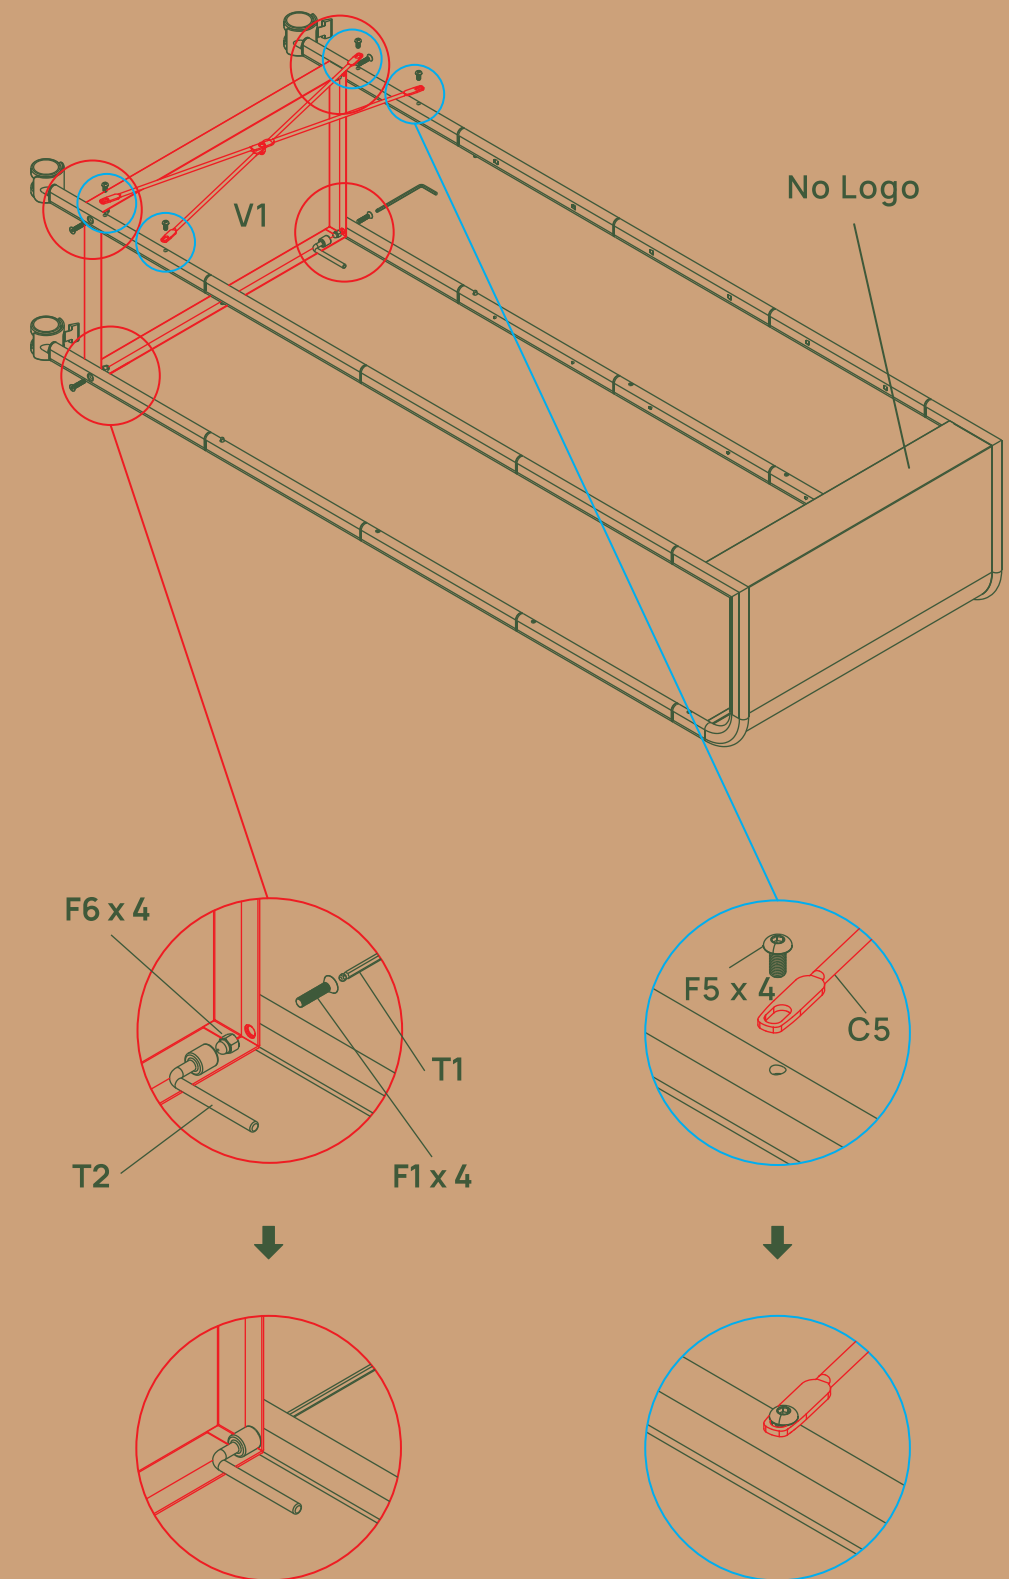


5 Install C2 as shown in the diagram.

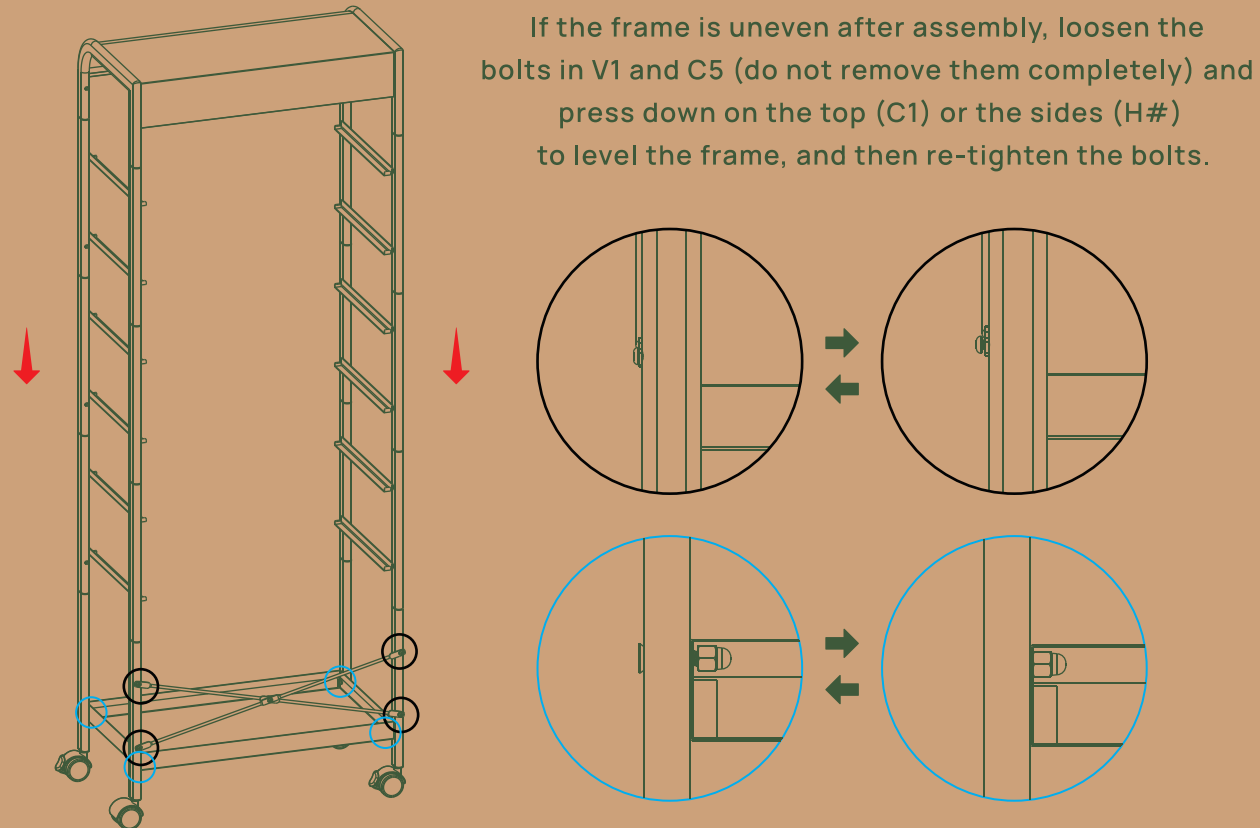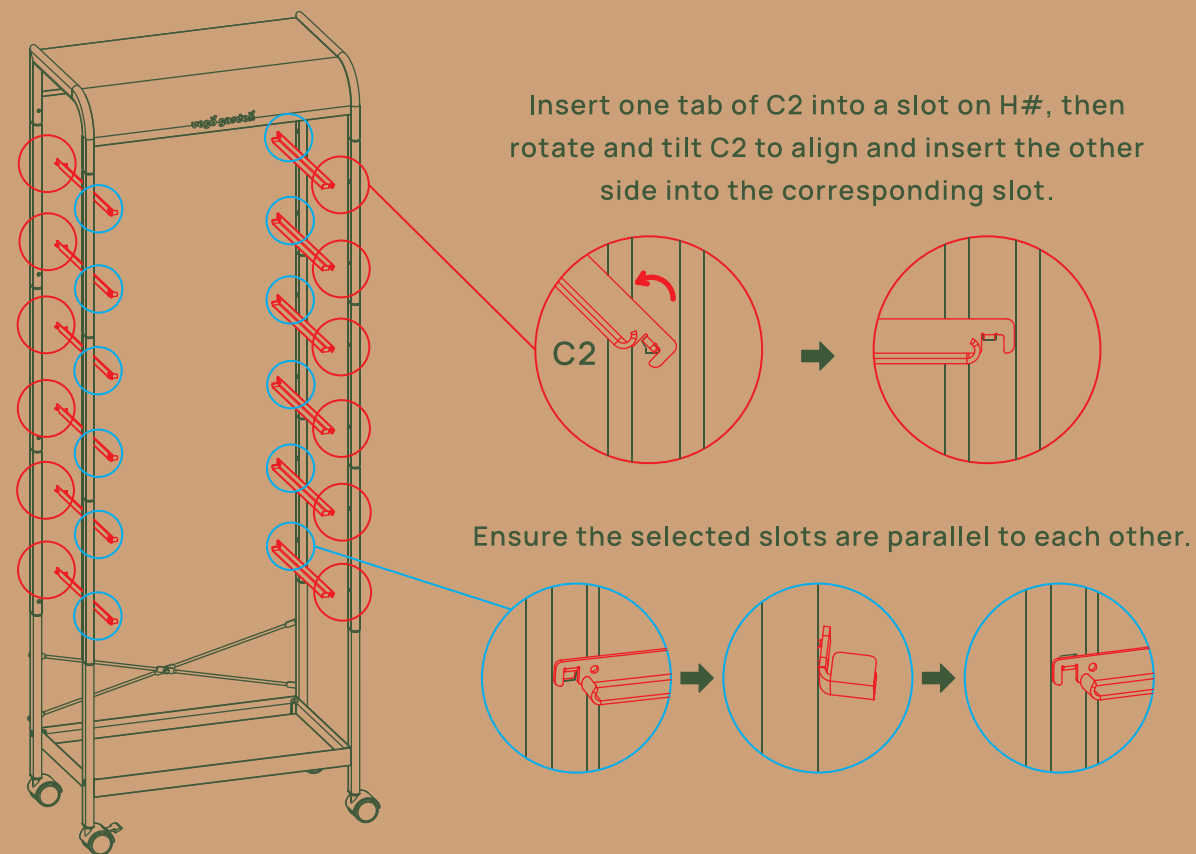

6 Place V2 and V3 in the position shown in the diagram.

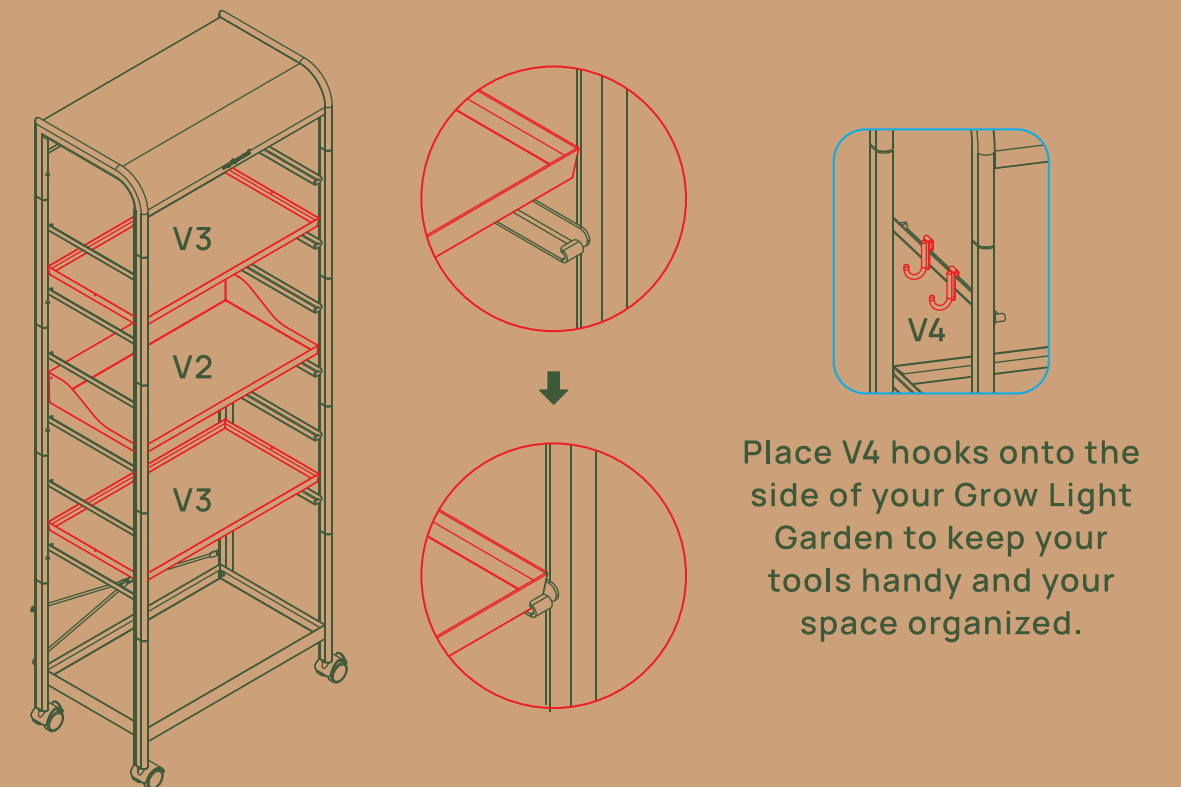


7 Secure the Grow Light Garden to the wall with V5 and F2. Choose the appropriate anchors based on the wall material: use F3 for concrete walls and F4 for drywall.

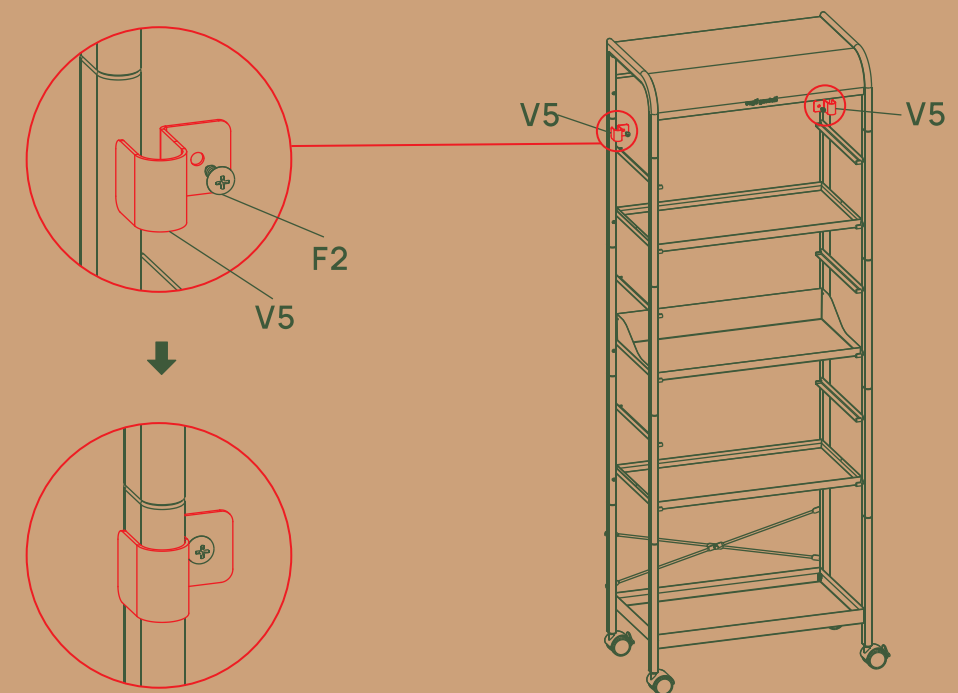


For VIGPR-F4S


1 The narrow ends of the legs are labeled. Insert the legs into their corresponding numbered places as shown in the diagram.

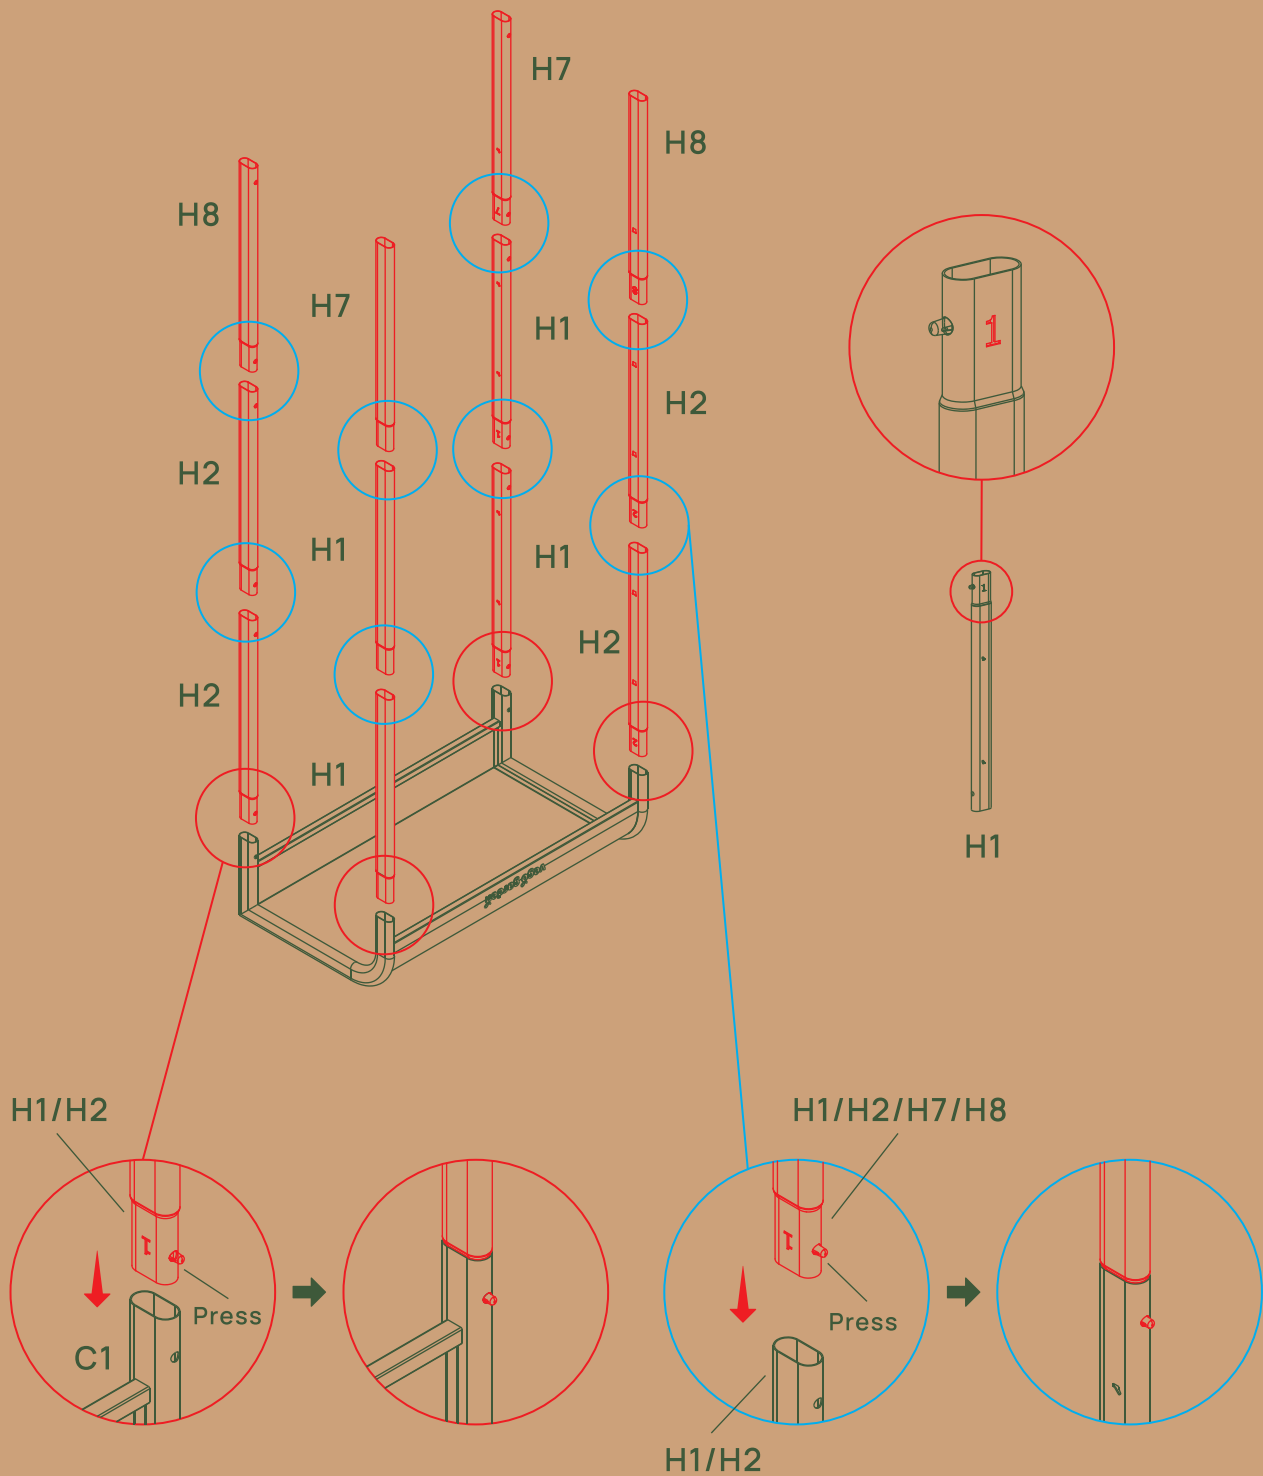


2 Install H3 and H4 as shown in the diagram.

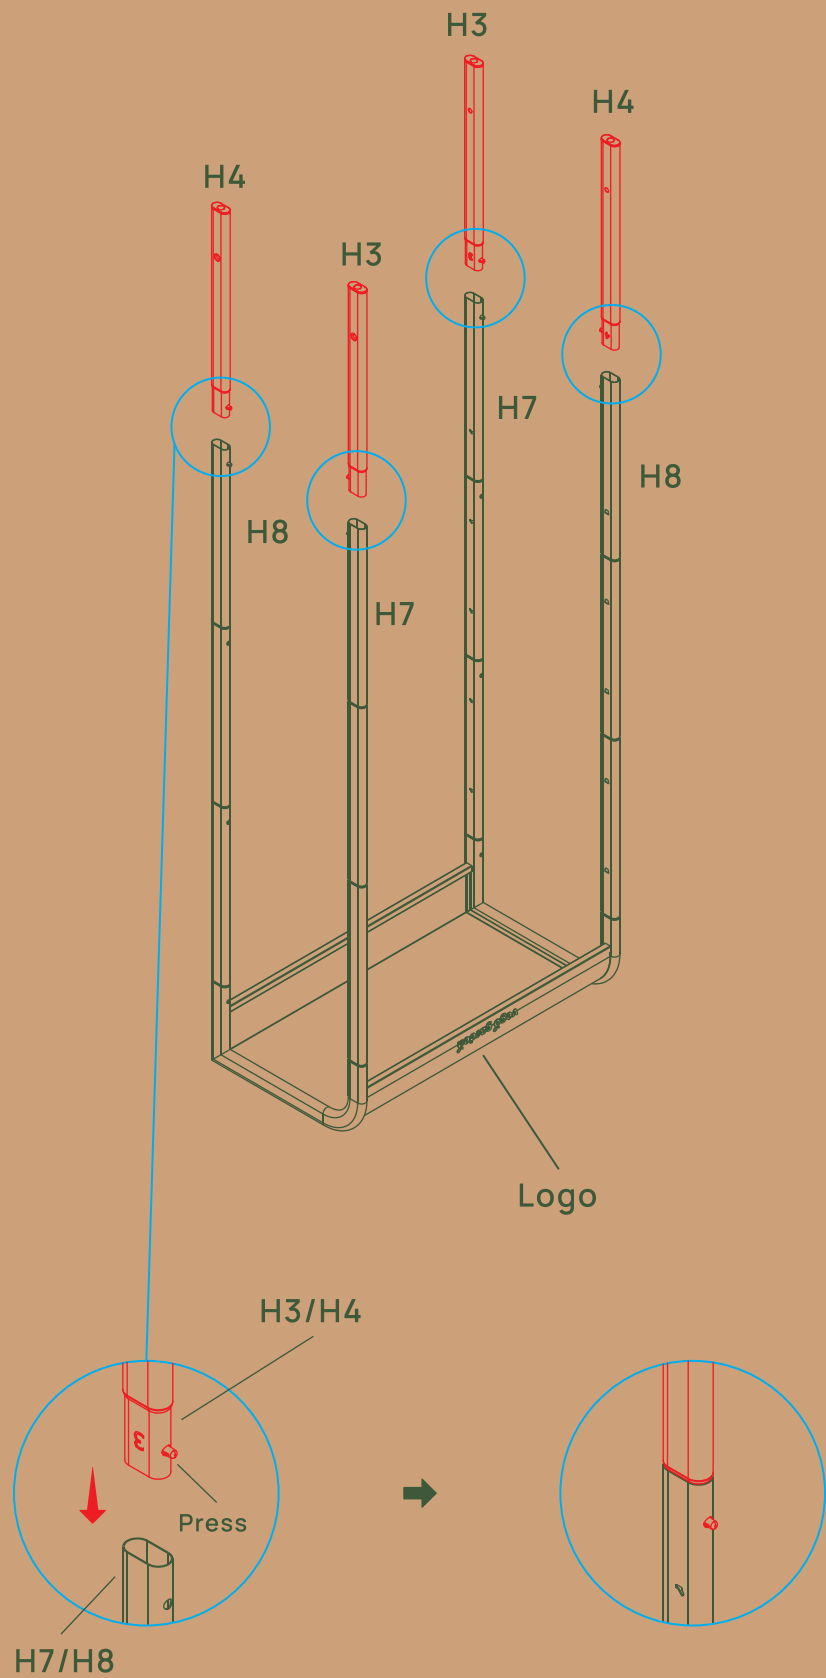


3 Install C3 and C4 as shown in the diagram.

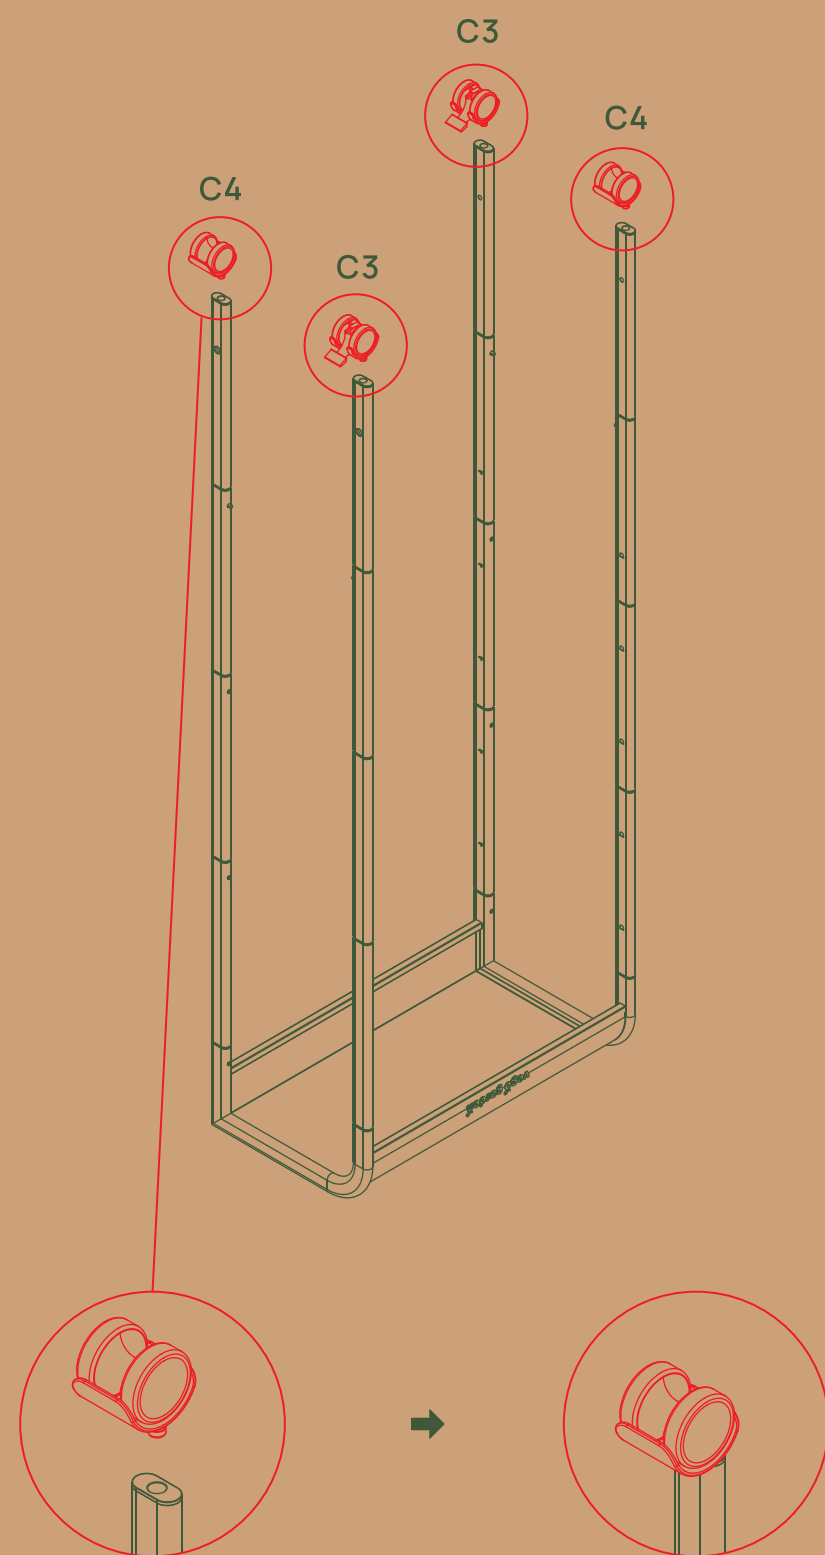


4 Slide two A1 pieces and two A3 pieces together as shown in the diagram.

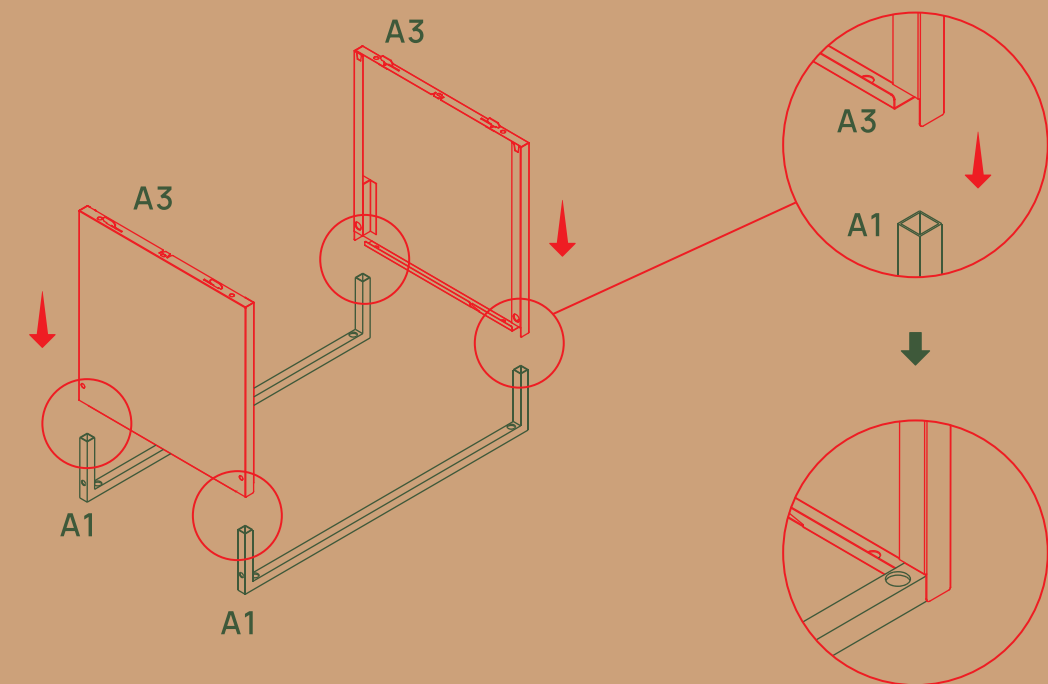


5 Install A4 as shown in the diagram. Insert A4 at an angle, and swing it into place. Then use a screwdriver to bend the tabs to secure.

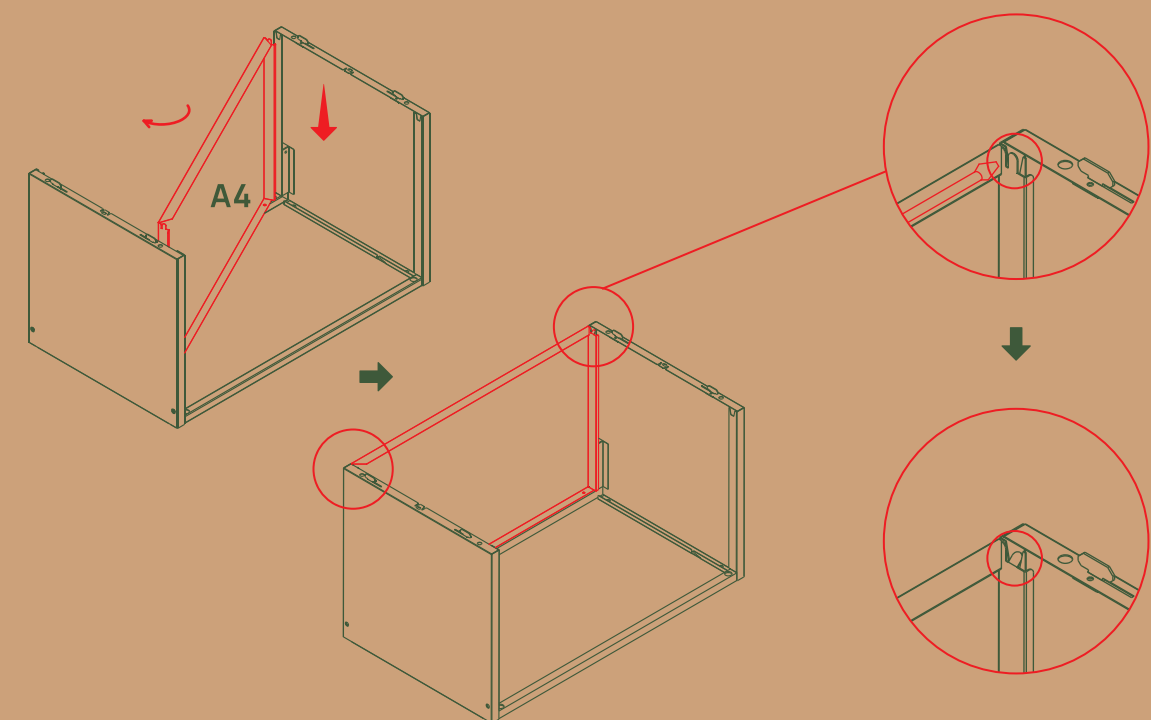

- 6** Install A5 as shown in the diagram, ensuring the **blue** section is inserted under A1.

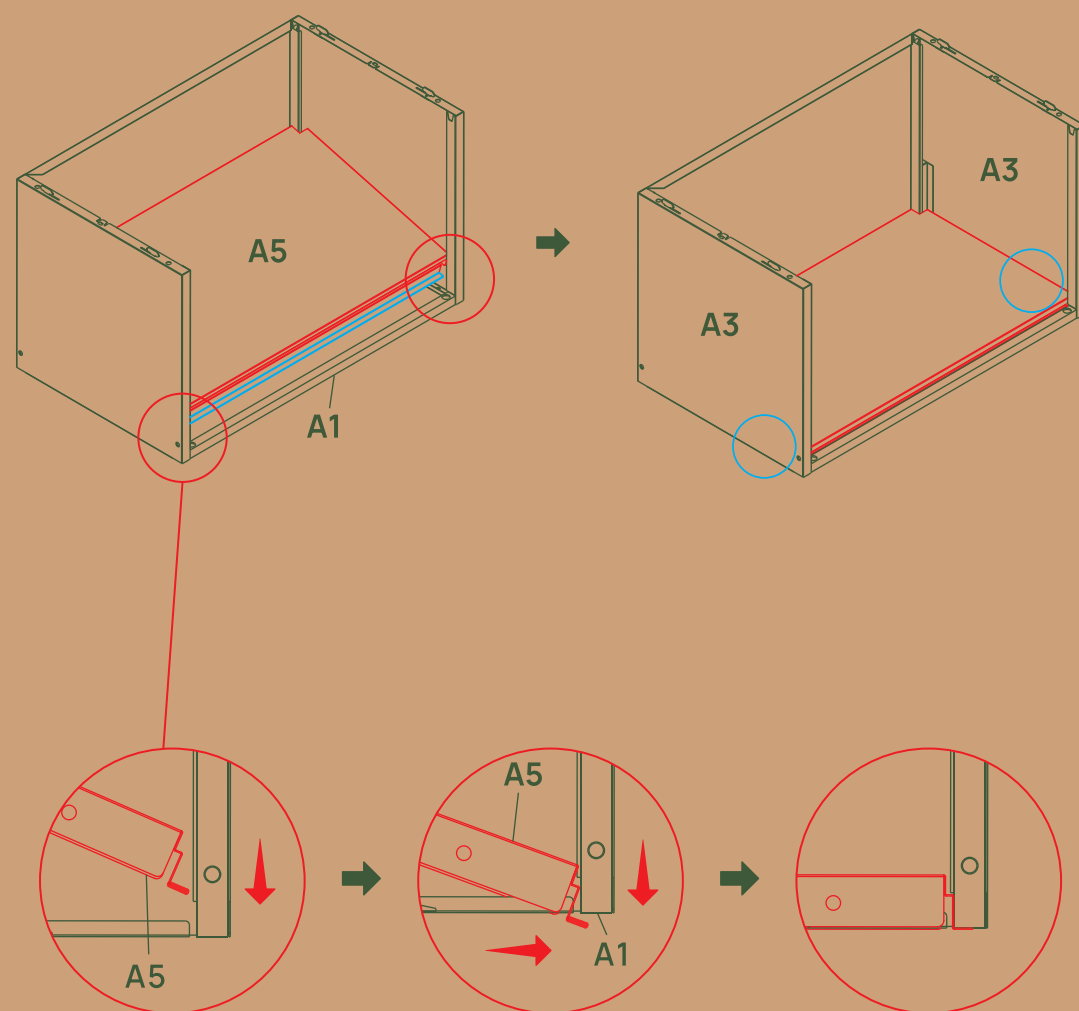


After A5 is in place, bend the inner tab of A3 to secure A5.

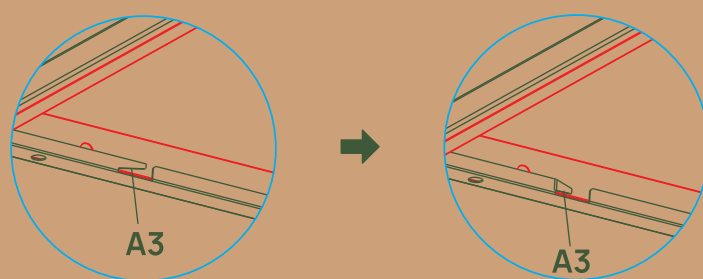


- 7** Install A2 as shown in the diagram.


Before installing A2, ensure the tabs on A3 have not gotten bent or misshapen in transit. If bent, use a tool to straighten.

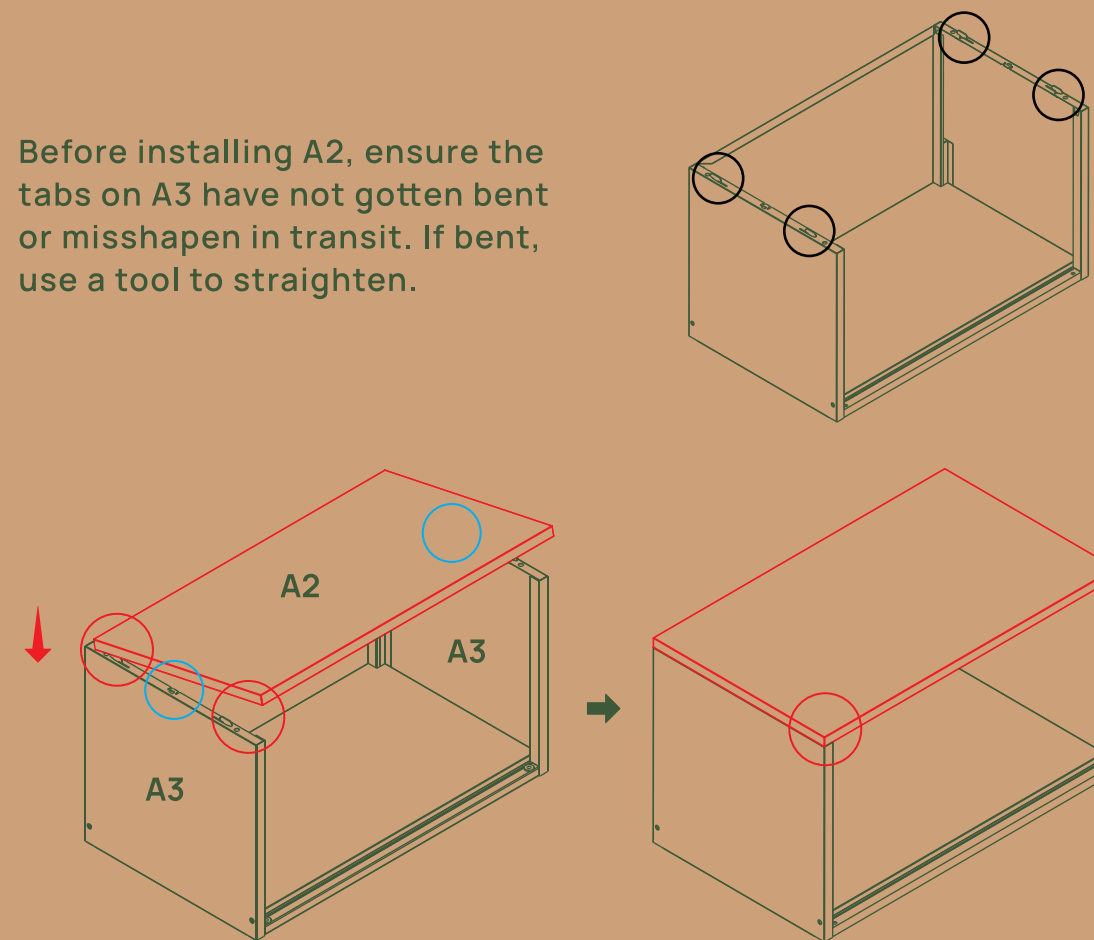


Align the A2 slots with the A3 tabs. Lower A2 and slide it backward to lock into place.

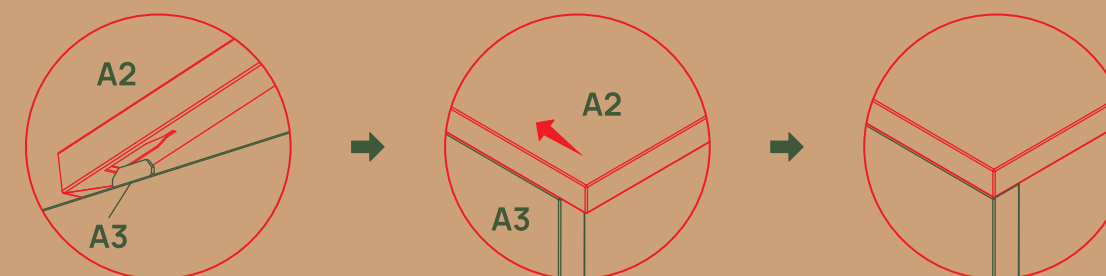


Then use a screwdriver to bend the inner tabs of A3.

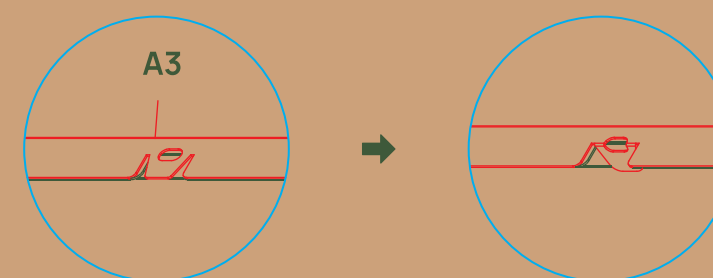


8 Install A6 and A7 following the steps below.

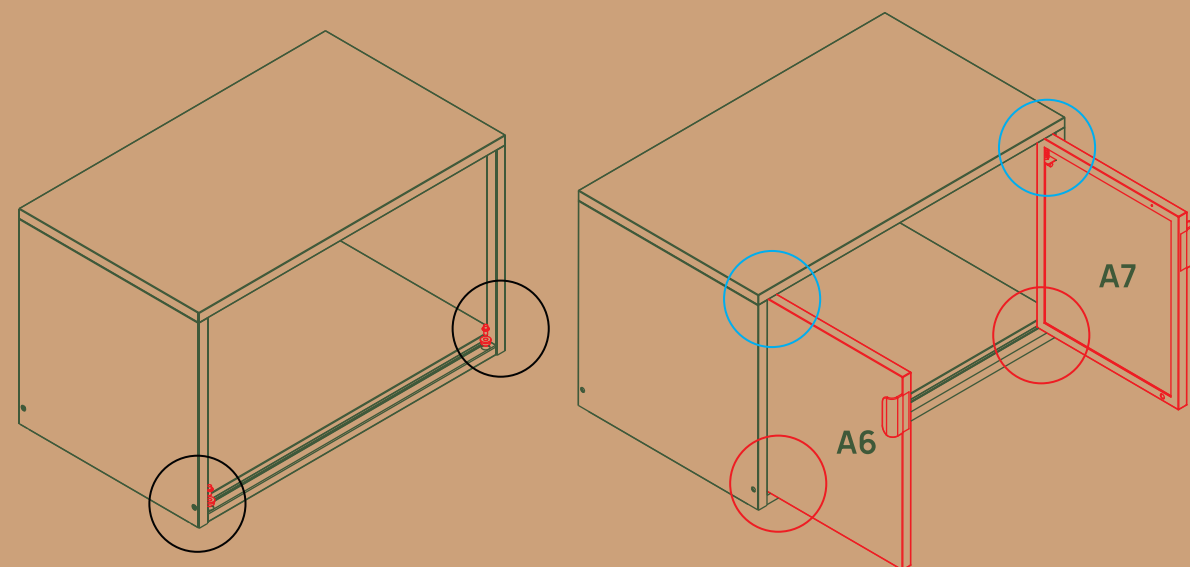


Install C6 and C7 as shown in the diagram.

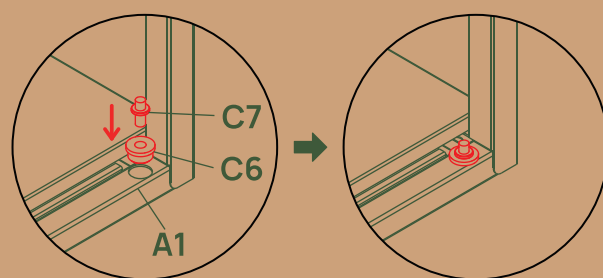



Pull down the top pins of A6 and A7.

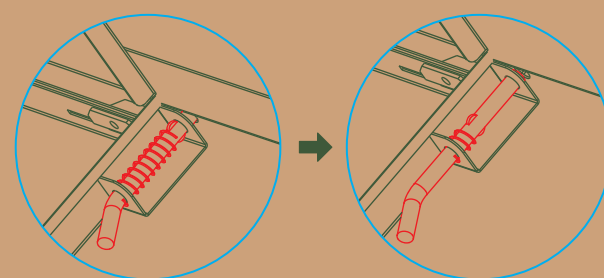


Align the bottom holes of the door panels with C7s and insert. Release the top pins to secure them into the top latch holes.

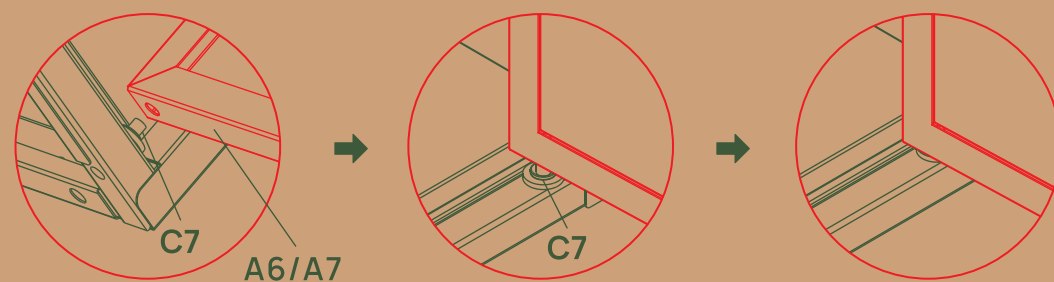


9 Attach the assembled cabinet to the frame completed in steps 4-8 using F1 as shown in the diagram.

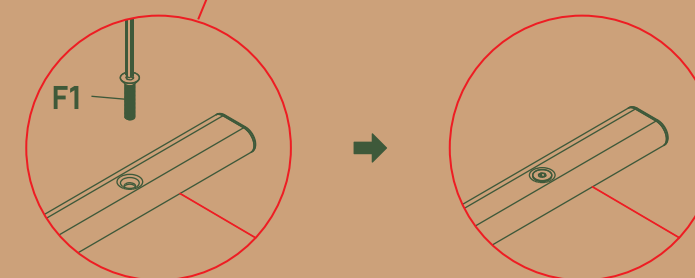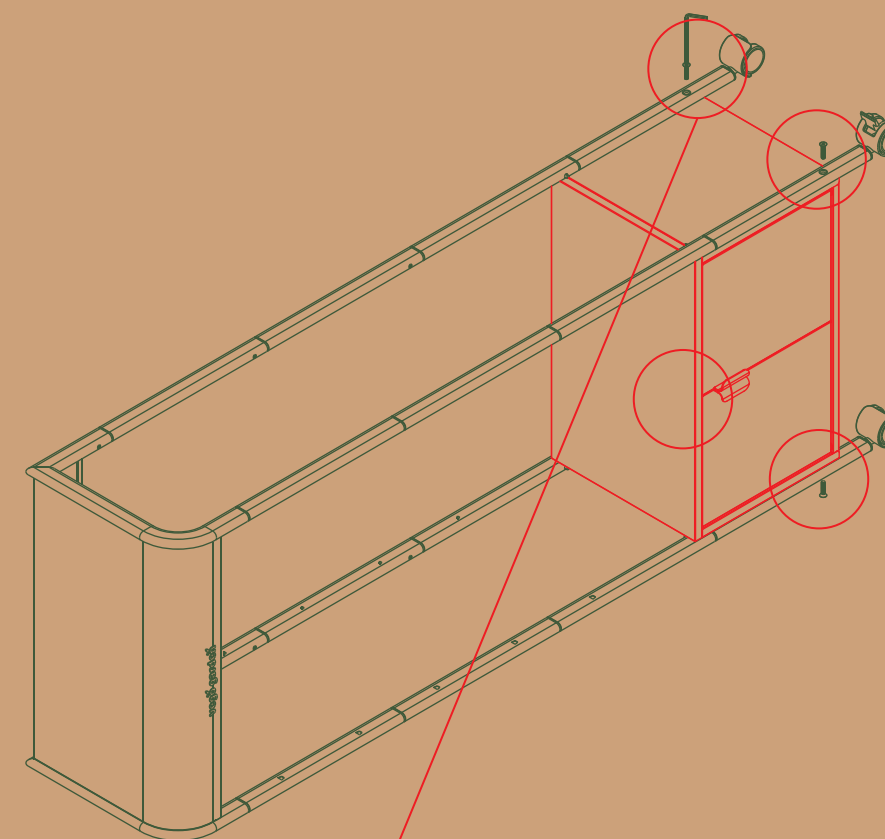



10 Install C2 as shown in the diagram.

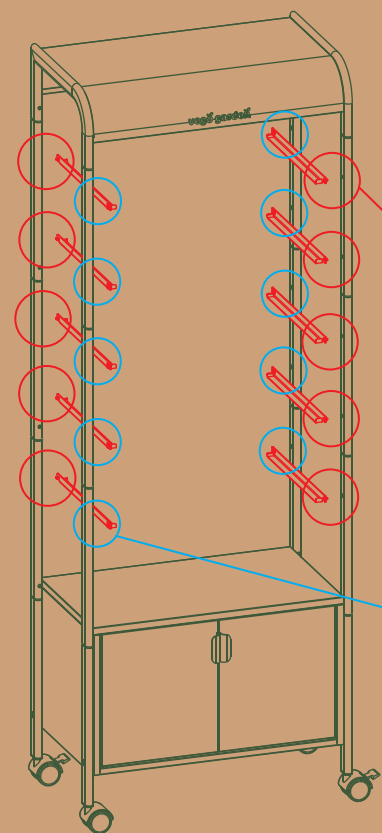


Insert one tab of C2 into a slot on H#, then rotate and tilt C2 to align and insert the other side into the corresponding slot.

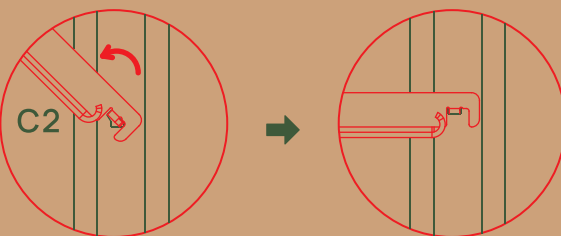





Ensure the selected slots are parallel to each other.

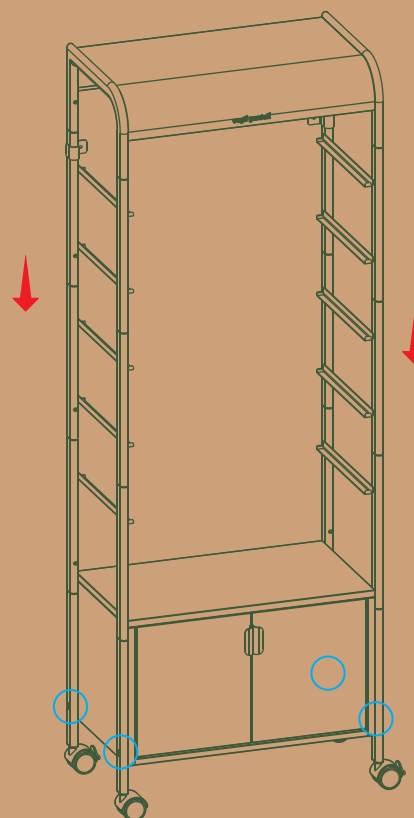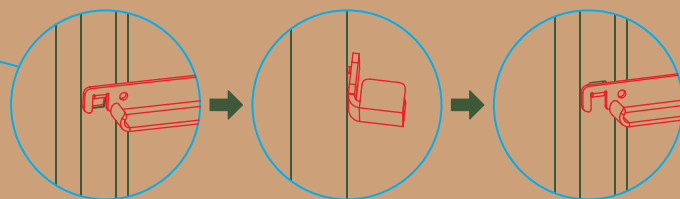

If the frame is uneven after assembly, loosen the cabinet's mounting bolts (do not remove them completely) and press down on the top (C1) or the sides (H#) to level the frame, and then re-tighten the bolts.

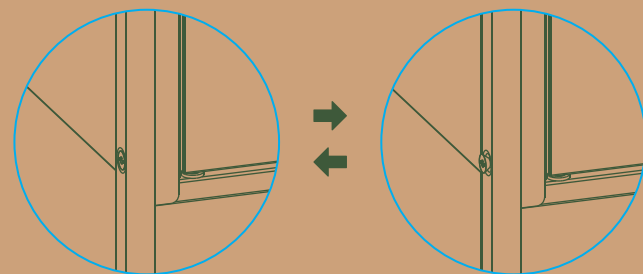


11 Place V2 and V3 in the position shown in the diagram.

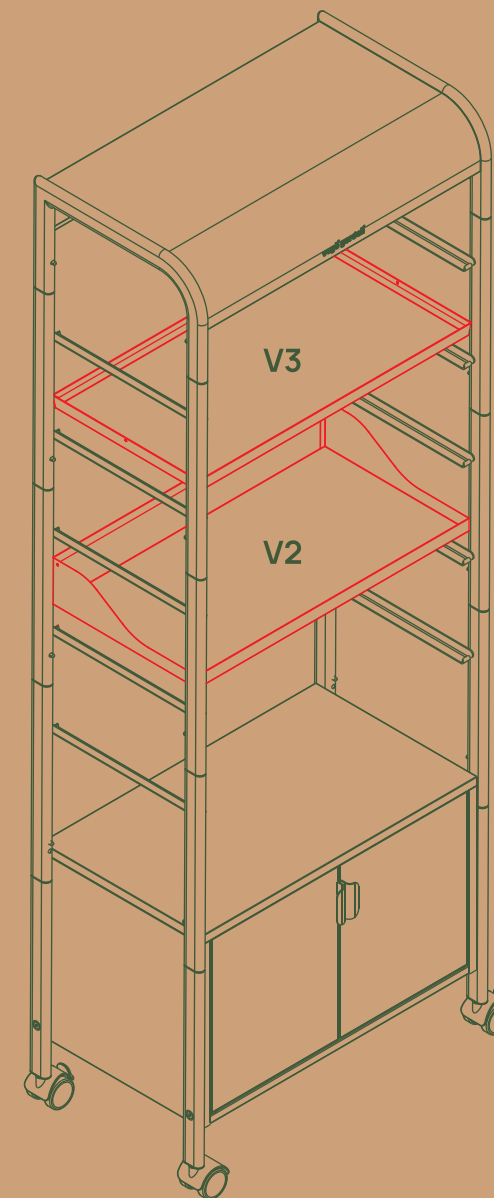


Place V4 hooks onto the side of your Grow Light Garden to keep your tools handy and your space organized.

- 12** Secure the Grow Light Garden to the wall with V5 and F2. Choose the appropriate anchors based on the wall material: use F3 for concrete walls and F4 for drywall.

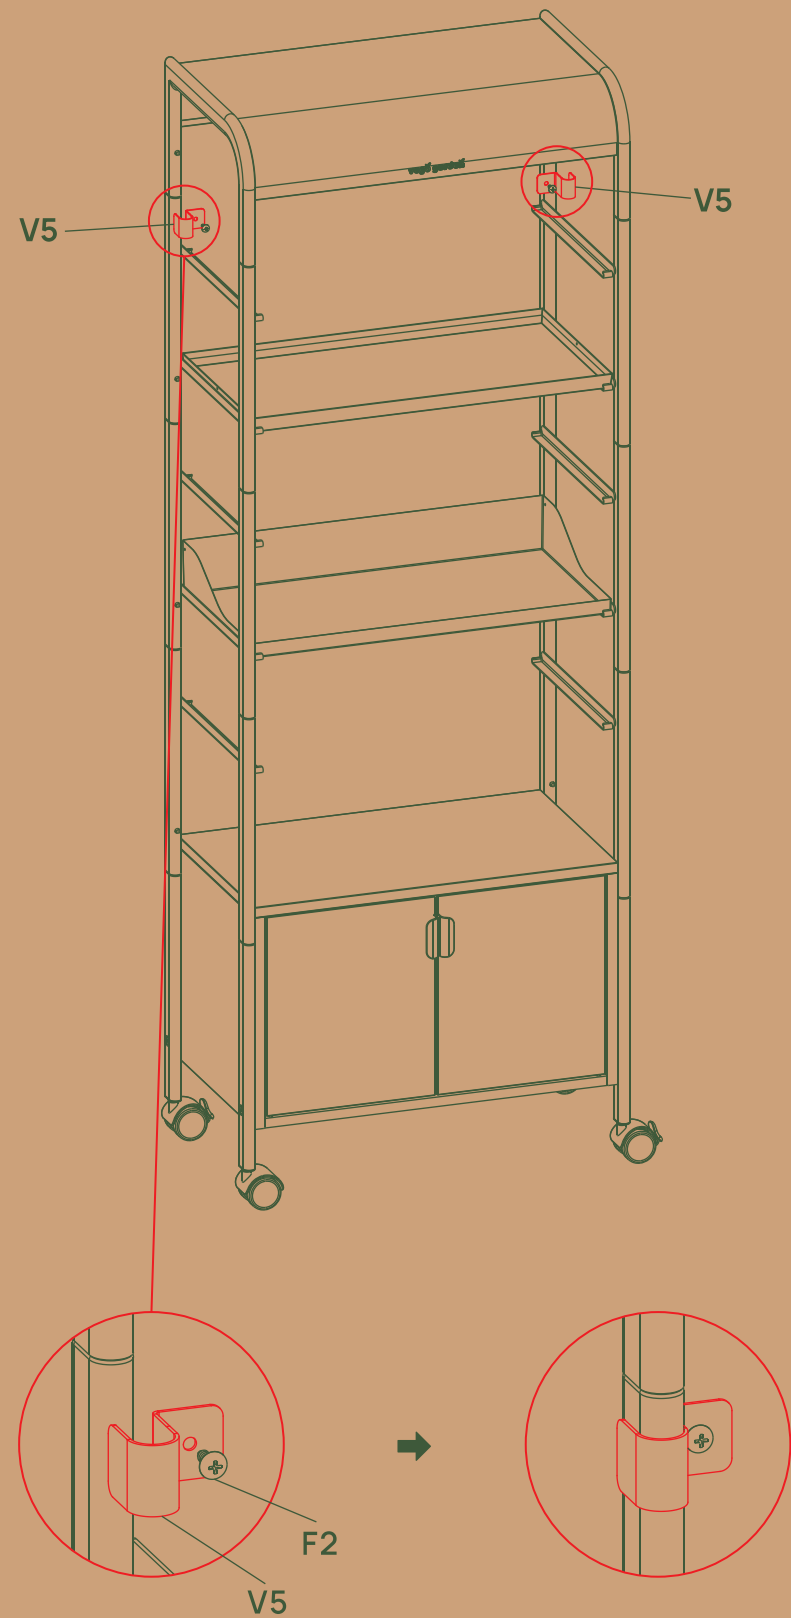

Adding Grow Lights


- 1** Attach P1 and P2 together using the magnetic connection.

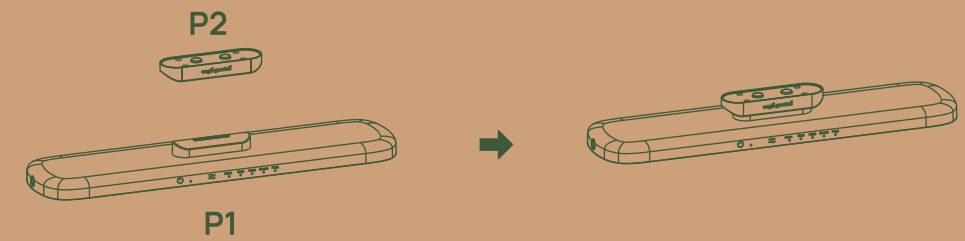

- 2** Magnetically attach the Grow Lights to the underside of each panel.




- 3** Use S5 to connect P1 in series. We recommend routing the wires along the back side of the Grow Light Garden for a neater look.

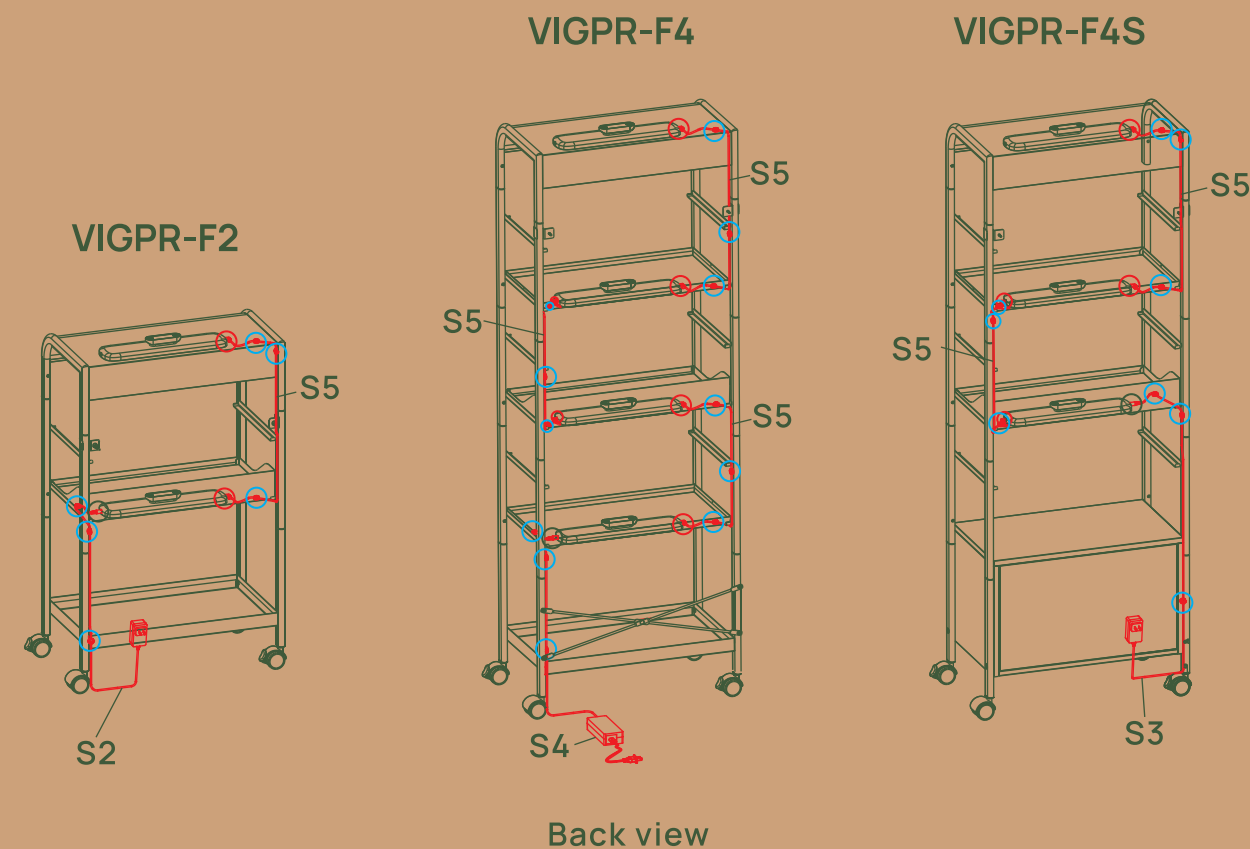


Use S7 to secure the S5 cables, then magnetically attach them to the frame and trays.

Use S5 to connect lights in series.

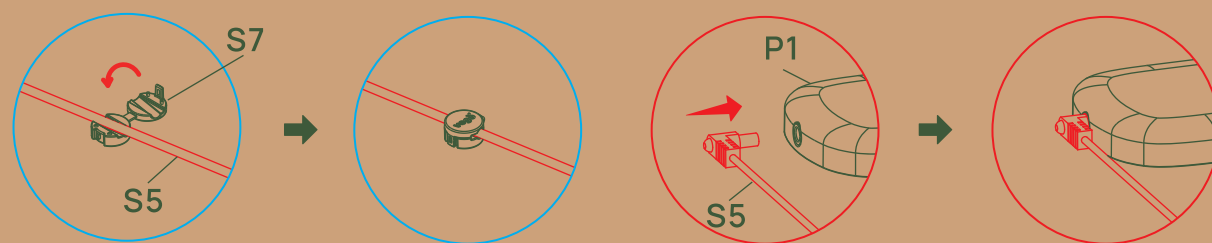

After organizing the cables, connect the power using S2, S3, and S4 (F2 to S2; F4 to S4; F4S to S3).

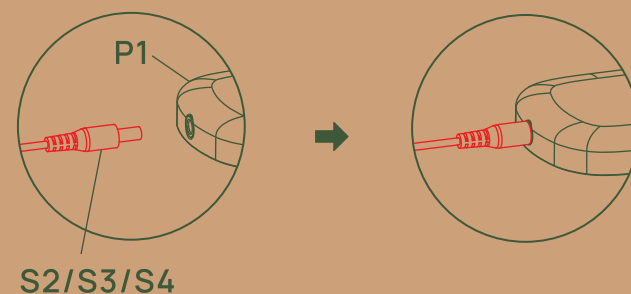

Cleaning and Maintenance

Tray Cleaning:

Remove the trays from the frame and clean them using mild soap and water. Ensure they are completely dry before reinserting them into the frame.

Frame Cleaning:

Wipe the frame with a damp cloth. Avoid using harsh chemicals that could damage the finish.

Cabinet Cleaning (F4S only):

Clean the storage cabinet regularly to prevent dust buildup. Wipe with a damp cloth and avoid direct water exposure.

Grow Light Maintenance:

Clean the light with a soft cloth to maintain optimal light intensity.



Operation Safety Precautions

Stability & Load Capacity:

Ensure the shelving unit is placed on a level surface. Always ensure that the frame is securely assembled before use. Do not exceed 33 pounds of weight on each tray.

Wheel Locks & Wall Brackets:

Lock the wheels when the unit is stationary. For extra safety, especially in homes with pets or children, secure the unit to a wall using the provided brackets.

Storage Cabinet (F4S Only):

The storage cabinet in the F4S model is designed for lightweight gardening tools and accessories. Avoid placing heavy items inside to maintain structure.

Water and Electricity Safety:

Keep the power cords and electrical components dry at all times. Avoid exposing the grow lights to water.

Handling:

Be cautious when adjusting trays or installing the grow lights to avoid injury.

Q&A

Q1: How do I adjust the trays on the shelving unit?

A1: The trays can be adjusted by placing them onto the side supports at the desired height. You can also remove the trays and stack them on top of each other if you need more space for taller plants.

Q2: Can I use the grow light without the shelving unit?

A2: Yes, the grow light can be used independently from the shelving unit. The magnetic mount allows you to easily attach the grow light to any steel surface or use our 3M adhesive plate for a non-steel surface.

Q3: How do I clean the trays and the frame?

A3: To clean the trays, simply remove them from the shelving unit and wash with mild soap and water. The frame can be wiped with a damp cloth. Avoid using harsh chemicals that could damage the material.

Q4: Can the shelving unit be used outdoors?

A4: The shelving unit is designed for indoor use. It may be used outdoors, but exposure to harsh weather conditions, direct sunlight, or moisture for prolonged periods may cause damage.

Q5: The grow light isn't turning on. What should I do?

A5: Ensure that the power cable is securely connected and that the light is plugged into a working electrical outlet. If the light still doesn't turn on, check if the connection wires between the lights are securely plugged in and ensure the light is turned on. If necessary, reconnect the wires.

Q6: How do I ensure my plants get the right amount of light?

A6: Adjust the grow light's position according to the height and needs of your plants. Use the different modes of the grow light to provide the appropriate light intensity and duration based on the plant's type and growth stage.

Q7: Is the unit easy to assemble?

A7: Yes, the shelving unit is designed for easy assembly with clear instructions provided in the manual. The process should take around 10-30 minutes, depending on the model.

Q8: Can it accommodate larger plants?

A8: Yes! In order to make room for larger or taller plants, remove and/or stack shelves to make openings for your plants to grow.

Q9: Is the grow light energy-efficient?

A9: Yes, the full-spectrum LED grow light is designed to be energy-efficient while providing the optimal light spectrum for plant growth. It consumes less power compared to traditional lighting options.

Q10: How long should I run the grow light each day?

A10: Our lights are smart and have preset lighting durations and intensities optimized for different plant growth needs. No additional adjustments are required. If you want to temporarily turn off the light but worry about forgetting to turn it back on, you can activate Sleep Mode following the instructions in the grow light manual.

Warranty and Support

Grow Light Warranty

LED Lifespan: 50,000 Hours.

Electronic Components: 2 year warranty.

Exclusions: Cosmetic damage (e.g., scratches after first use) is not covered under warranty.

Shelving Unit Warranty

Warranty Period: 3 years.

Exclusions: Normal wear and tear, improper usage, and cosmetic damage are not covered.

General Warranty Terms

Warranty is valid for products used as intended and following the provided manual.

Repair or replacement decisions will be made after inspection of the defective parts.

Repair Policy

After the warranty period, replacement parts (e.g., LED boards or electronic components) can be purchased at a fraction of the product cost.

Customer Support:

For any issues, please contact our customer support team via:

Email: hello@vegogarden.com

Website: www.vegogarden.com